

INDEX



	AC/DC	Enclosed				MPM-05/10/15/20/30-x ST MPM-45 / 65 / 90-x ST	54 55
	S Series Series	LRS-35, LRS-50, LRS-75, LRS-100 LRS-150F, LRS-150, LRS-200, LRS-350 RS-15 / 25 / 35 / 50 / 75 / 100 / 150 RD-35 / 50 / 65 / 85 / 125 RID-50 / 65 / 85 / 125, RT-50 / 65 / 85 / 125 RQ-50 / 65 / 85 / 125	1 2 3~4	Me	dical	MFM-05 / 10 / 15 / 20 / 30 RPS-30, RPS-45, RPS-65, RPS-120S RPS/D/T-60, RPS-120/200, RPS-120 / 200-x-C RPS/D/T-75, RPS G/T-160, RPT-160-C RPS-300/400, RPS-300/400-x-C, RPS-400-x-TE/-SF RPS-500-x-C/-x-TF/-x-SF, MPQ-200	56 57 58 59 60
SE	Series	SE-450, SE-600, SE-1000, SE-1500	5				01
		PSP-600, PSPA-1000	6		AC/DC	External Adaptor	
PFC	General	HRP-75, HRP-100, HRPG-150 HRPG-200 / 300 / 450 HRPG-600, HRPG-1000 HRP-150N / 300N / 600N RSP-750, RSP-1000, RSP-1600, RSP-2000 RSP-1500, RSP-2400, RSP-3000	7 8 ~10 11 12 13 14 15	tor	Industrial	GST18A/B/E/U, GST25A/B/E/U, GST36B/E/U GST40A / 60A / 90A / 120A GST160A / 220A / 280A / 360A GS05E/U-USB, GS06E/U, GS15A/B/E/U SGAS06U/E,SGAS15A/B/U/E,SGAS60E/U SGA12E/U, SGA18E/U, SGA25E/U SGA40E/U/CH, SGA60E/U GE12/18/24/30/GE40 Interchangeable AC Plug GP25A, GP25B, GP50A	63 64 J 65 J 66 67 68
		CSP-3000 RST-5000, RST-7K5 RST-10000, RST-15K	17 18 19	ल	Moistureproof	OWA-60E/U, OWA-90E/U OWA-120E/U, OWA-200E/U Changeable DC Plug Converter Selection Guide	71 72 73
	Conduction Cooled	SHP-10K UHP-200, UHP-350, UHP-500 UHP-750, UHP-1000 UHP-1500, UHP-1500-HV, UHP-2500	20 21 22 23	22	Medical	GSM06/12 E/U, GSM18/25B/E/U GSM36B/E/U, GSM60E/U, GSM40/60A/B GSM90A/B, GSM120A/B GSM160A/B, GSM220A/B	74 75 76 77
	Digitalized	DPU-3200, PHP-3500, PHP-3500-HV	24			GEM06I, GEM12I, GEM18I	78
	DC House		~26			GEM30I / 40I / 60I Interchangeable AC Plug 2	79
		SPV-150, SPV-300 Output Voltage Programmable	27		Configu	rable Power	
	Module Module	ERDN20, ERDN40	28			UMP-400	80
	Medical	MSP-100, MSP-200, MSP-300 29 MSP-450, MSP-600, MSP-1000 30			dular ries	NMS-240, NMD-240	1~82 3~84
	DIN Ra	nil Type				MS-75 / 150 / 210 / 300 / 360, MD-100	, -04
		MDR-10 / 20 / 40 / 60 / 100 HDR-15, HDR-30, HDR-60 HDR-100, HDR-150 SDR-75 / 120 / 240 / 480 P/ 960	31 32 33 34	Po	" Rack wer	RCP-1000, RCP-1U, RCP-1600, RHP-1U RCP-2000, RKP-1U_, RKP-CMU1, RKP-1U CMU1 DRP-3200, DHP-1UT-A, CMU2 -R	85 86 87
		NDR-75, NDR-120, NDR-240, NDR-480	35		Battery	Charger	
ווח	J Sarias	EDR-75, EDR-120, EDR-150 WDR-60, WDR-120, WDR-240, WDR-480	36 37	Por	rtable	GC30B/E/U, GC120, GC160, GC220, GC330 ENP/ENC-120 / 180 / 240 / 360	0 88 89
DIN Series		TDR-240, TDR-480, TDR-960 DRA-40, DRA-60 DRDN20, DRDN40 DBUF20, DBUF40 DUPS20, DUPS40 DR-UPS40 ICL-16R, ICL-16L, ICL-28R, ICL-28L	38 39 40 41 42 43 44	Sta	ationary	PA-120, PB-120 PB-300/360/600/1000 NPB-120/240/360 NPB-450/750/1200/1700 NPP-450/750/1200/1700 RPB-1600, RCB-1600 DBU-3200, DBR-3200, DHP-1UT	90 91 92 93 94 95 96
	AC/DC	Open Frame				SBP-001 Smart Programmer Connection HEP-600C, BIC-2200	97 98
		LPS-50 / 75 / 100, LPP-100 / 150	45				90
Inc	lustrial	PS-05, PD-25, PD-45/65,PT-45/65,PT-6503 RPD-65, RPT-65, PPT-125, PID-250 EPS-15, EPS-25/35, EPS-45S, EPS-65S EPS-45 / 65-x © / EPS-120, EPP-120S ELP-75, EPP-100, EPP-150, EPP-200 EPP-300, EPP-400, EPP-500	46 47 48 49 50		ue Sine	NTU-1200 / 1700 / 2200 / 3200	99 100 101 102 103
		IRM-01-xS/02-xS/03-xS/05/10/15/20				TN-1500, TN-3000	104
		IRM-30 / 45 / 60 / 90 -x ST	53	Мо	dified Sine	A301, A302	105

INDEX



■Specific Purpose

		The state of the s	
	arsh ivironment	HEP-100, HEP-150, HEP-185 HEP-240,HEP-320, HEP-480 HEP-600, HEP-1000, HEP-1000-W	106 107 108
		DRS-240, DRS-480	109
		DRC-40, DRC-60	110
	DRC-100, DRC-180	111	
Security		PSC35-x-C, PSC60-x-C, PSC-100-x-C, PSC-160-x-C	112
		ADS-55, AD-55, ADD-55, ADS-155, AD-155, ADD-155	113
		SCP-35, SCP-50, SCP-75	114
×	Power	KNX-20E, KNX-40E	115
KNX	Actuator	KAA-8R, KAA-4R4V	116
LE	D Sign Panel	LSP-160, UHP-200A	117
Rainproof		ERP-200, ERP-350, ERPF-400	118

■DC/DC Converter

DIN Rail		ail	DDRH-60 DDR-15, DDR-30, DDR-60	119 120				
DIN Kall			DDR-120, DDR-240, DDR-480 RSD-30, RSD-60, RSD-100, RSD-150	121 122				
Englaced			RSD-200, RSD-300, RSD-500	123				
Enclosed			SD-15, SD-25, SD-50, SD-100	124				
			SD-150/200/350/500/1000	125				
	/ay	DIP	RSDW08, RDDW08, RSDW10, RDDW10	126				
	Medical Railway	2"x1"	RSDW20, RDDW20, RSDW20UW, RDDW20UW					
	~		RSDW40, RDDW40, RSDW60, RDDW60	128				
	ca	SIP	MDS01, MDD01, MDS02, MDD02	129				
	edi	DIP	MDS03, MDD03, MDS06, MDD06	130				
	Σ	2"x1"	MDS15, MDS20	131				
			SPOL-01,SPOL-12P,SPOL-12N	132				
		SMD	N78-PV/PH/C/CW	133				
							SMT01, SBTN01, SFTN01	134 135
				DETN01, SFTN02, DETN02	136			
		SIP DIP	SMU01, SMU02, SPU01, DPU01 SPUN02, DPUN02, SPU03	137				
			SPRN01, DPRN01, SPA01	138				
2			SPAN02, DPAN02, SPB09, DPB09	139				
Board			SPBW03, DPBW03, SPBW06, DPBW06	140				
			SRS, SUS01, SMA01	141				
On	_		SLC03, DLC03, SCWN03, DCWN03	142				
•	ë		SCWN06, DCWN06, SCW08, DCW08	143				
	Sti		SCW12, DCW12, SCW20	144				
	3		SKMW06, DKMW06, SKM10, DKM10	145				
	2	2	P	1"x1"	SKMW15, DKMW15, SKMW20, DKMW20	146		
	_		SKMW30, DKMW30	147				
			SLW05, DLW05, SKE10, DKE10	148				
		2"x1"	SKA15, DKA15	149				
			SKA20, SKM30, SKM50	150				
			SKE15, DKE15	151				
		2"x2"	SDM30, DKA30, TKA30	152				
			SKA40, SKA60	153				
		Brick	MHB75, MHB100, MHB150	154				
		Others	NSD05/10-S, NSD10-D, NSD15-S/D	155				
			NID35, NID65, NID100	156				
O	pen	Frame	PSD-15, PSD-30, PSD-45	157				

■Accessories

Accessories	DRL-01 / 02 / 03A, DRP-01 / 01A / 02 / 03 / 04 158
	MHS012 / 013 / 014 / 025 / 026 / 027
	TBC-05 / 07 / 08 / 09, DH12A40V

MEAN WELL Suzhou Intelligent Campus 159



Type	Series	Model No.	Page					
		PSPA-1000	6					
	PFC / General	HRP all models	11~12					
		HRP(G)-600, HRPG-1000	13					
AC/DC Enclosed	Programmable	DPU-3200	24					
Liloloscu	Medical	MSP all models	29~30					
	DIN	SDR-75 / 120 / 240 / 480 P / 960	34					
	DIN	WDR-60 / 120 / 240 / 480	37					
AC/DC External Adaptor	Adaptor	OWA all models	71~72					
Configurable Power	Modular	NMP-650 / 1K2	81~82					
19" Rack Power	1U Front End	DRP-3200	87					
DC/DC Converter	Enclosed	RSD all models	122~123					

Type	Series	Model No.	Page
	LRS	All models	1~2
	G3	RS/RD/RT/RQ all models	3
	SE	SE-1000 / 1500	5
	PFC / General	PSP-600	6
	PPC / General	RSP-75 / 100 / 150 / 200 / 320 / 500	7~8
		RSP-750 / 1000 / 1600 / 2000	15
	PFC /	RSP-2400 / 3000	16
	Programmable	RST-5000 / 10000	18
AC/DC Enclosed		RST-10000 /15K	19
Liloloscu	PFC /	UHP-200 / 350 / 500	21
	U-bracket	UHP-750 / 1000 /1500 / 2500	22~23
		MDR-10 / 20 / 40 / 60 / 100	31
		HDR-15 / 30 / 60 / 100 / 150	32~33
	DIN	NDR-75 / 120 / 240 / 480	35
		EDR-75 / 120 / 150	36
		TDR-240 / 480 / 960	38
		DRA-40 / 60	39
		EPS-15/25/35/45/45S/65/65S/120	48~49
	Industrial	EPP all models	50~51
		IRM all models	52~53
		MPM all models	54~55
AC/DC Open Frame		MFM-05 / 10 / 15 / 20 / 30	56
Open Frame	Medical	RPS-30/45/65, RPS-60/65 RPS-120/120S/200-x -C	57~58
		RPS/D/T-75, RPS/T-160, RPT-160-C	59
		RPS-300 / 400 / 500 -x -C	60~61
AC/DC	Industrial	GST all models	62~64
External Adaptor		SGAS06 / 15 / 60	66
Battery		ENP/ENC-120 / 180 / 240 / 360	89
Charger	Stationary	RCB-1600	95
0.000.000.000		DBR-3200	96
Security Power Solution	Security	PSC-35 / 60 / 100 / 160 x-C	112
DC/DC Converter DIN		DDRH-60 DDR-15 / 30 / 60 / 120 / 240 / 480	119~121

Enclosed-LRS Series 35~100W Low Profile





■ Features

- No load power consumption <0.2W for 35W/50W; < 0.3W for 75W/100W
- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Ultra compact and 1U low profile
- Withstand 5G vibration test
- High operating temperature up to 70°C
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Compliance to IEC/EN60335-1(PD3) and IEC/EN61558-1,-2-16 for household appliances
- Operating altitude up to 5000 meters
- High efficiency, long life and high reliability
- LED indicator for power on
- Low cost
- 3 years warranty

■ General Specification









			A THE CONTRACT OF THE CONTRACT						
Model No.		LRS-35 LRS-50 LRS-75 LRS-100							
AC input voltage range		85~264VAC ; 120~370VDC	85~264VAC; 120~370VDC						
AC inrush current (max.)		Cold start, 45A at 230VAC	Cold start, 45A at 230VAC 65A at 230VAC 50A at 230VAC						
DC adjustment range		±10% by potentiometer							
Overload	Range	110%~150%							
protection	Туре	Hiccup mode, auto-recovery							
Over voltage	Range	115%~135% rated output voltage							
protection	Туре	Shut down o/p voltage, re-power on to recover							
Withstand voltage		I/P-O/P: 4kVAC, I/P-FG: 2kVAC, O/P-FG: 1.25kVAC, 1 minute							
Working temperatur	е	-30~+70°C (refer to output derating curve)							
Safety standards		UL62368-1,BS EN/EN62368-1, <mark>BS EN/EN61558-1, EN61558-2-16, BS EN/EN60335-1,</mark> CCC GB4943, BIS IS13252, BSMI CNS14336-1, EAC TP TC 004, AS/NZS 60950.1 KC K60950-1(12/24V only)approved							
EMC standards		BS EN/EN55032 class B, EN55014, EN61000-3-2, 3, EN61000-4,2,3,4,5,6,8,11 ; GB9254 ; CNS13438							
Connection		5P/9.5mm pitch terminal block 7P/9.5mm pitch terminal block							
Dimension (LxWxH) (mm)		99x 82x 30		99x 97x 30	129x 97x 30				

■ 35W				LRS-35	■ 75W				LRS-75
Model No.	Output	Tol.	R&N	Effi.	Model No.	Output	Tol.	R&N	Effi.
LRS-35-5	5V, 0~7A	±2%	80mV	82.0%	LRS-75-5	5V, 0~14A	±2%	100mV	86.5%
LRS-35-12	12V, 0~3A	±1%	120mV	86.0%	LRS-75-12	12V, 0~6A	±1%	120mV	89.0%
LRS-35-15	15V, 0~2.4A	±1%	120mV	86.0%	LRS-75-15	15V, 0~5A	±1%	120mV	89.0%
LRS-35-24	24V, 0~1.5A	±1%	150mV	88.0%	LRS-75-24	24V, 0~3.2A	±1%	150mV	90.0%
LRS-35-36	36V, 0~1A	±1%	200mV	88.0%	LRS-75-36	36V, 0~2.1A	±1%	200mV	91.5%
LRS-35-48	48V, 0~0.8A	±1%	200mV	89.0%	LRS-75-48	48V, 0~1.6A	±1%	200mV	91.5%
A CONTRACTOR OF THE PROPERTY O									
■ 50W				LRS-50	■ 100W			L	.RS-100
Model No.	Output	Tol.	R&N	LRS-50 Effi.	100W Model No.	Output	Tol.	R&N	.RS-100 Effi.
	Output 3.3V, 0~10A	Tol. ±3%	R&N 80mV		- Million Committee	Output 3.3V, 0~20A	Tol.		
Model No.				Effi.	Model No.			R&N	Effi.
Model No. LRS-50-3.3	3.3V, 0~10A	±3%	80mV	Effi. 80.0%	Model No. LRS-100-3.3	3.3V, 0~20A	±3%	R&N 100mV	Effi. 84.5%
Model No. LRS-50-3.3 LRS-50-5	3.3V, 0~10A 5V, 0~10A	±3% ±2%	80mV 80mV	Effi. 80.0% 83.0%	Model No. LRS-100-3.3 LRS-100-5	3.3V, 0~20A 5V, 0~18A	±3% ±2%	R&N 100mV 100mV	Effi. 84.5% 86.0%
Model No. LRS-50-3.3 LRS-50-5 LRS-50-12	3.3V, 0~10A 5V, 0~10A 12V, 0~4.2A	±3% ±2% ±1%	80mV 80mV 120mV	Effi. 80.0% 83.0% 86.0%	Model No. LRS-100-3.3 LRS-100-5 LRS-100-12	3.3V, 0~20A 5V, 0~18A 12V, 0~8.5A	±3% ±2% ±1%	R&N 100mV 100mV 120mV	Effi. 84.5% 86.0% 88.0%
Model No. LRS-50-3.3 LRS-50-5 LRS-50-12 LRS-50-15	3.3V, 0~10A 5V, 0~10A 12V, 0~4.2A 15V, 0~3.4A	±3% ±2% ±1% ±1%	80mV 80mV 120mV 120mV	Effi. 80.0% 83.0% 86.0% 88.0%	Model No. LRS-100-3.3 LRS-100-5 LRS-100-12 LRS-100-15	3.3V, 0~20A 5V, 0~18A 12V, 0~8.5A 15V, 0~7A	±3% ±2% ±1% ±1%	R&N 100mV 100mV 120mV	Effi. 84.5% 86.0% 88.0% 88.5%

Enclosed-LRS Series 150~350W Low Profile





Features

- No load power consumption <0.5W for 150W; <0.75W for 200W/350W
- AC input selectable by switch (LRS-150F Universal AC input / Full range)
- Withstand 300VAC surge input for 5 seconds
- Ultra compact and 1U low profile
- · Withstand 5G vibration test
- High operating temperature up to 70°C
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Cooling by free air convection (150W/200W); forced air cooling by built-in DC fan (350W)
- Compliance to IEC/EN60335-1(PD3) and IEC/EN61558-1,-2-16 for household appliances (150W)
- Operating altitude up to 5000 meters
- LED indicator for power on
- High efficiency, long life and high reliability
- Low cost
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No. AC input voltage range AC inrush current (max.)		LRS-150F	LRS-150	LRS-200	LRS-350					
		85~264VAC; 120~370VDC 115 / 230VAC by switch								
		Cold start, 60A at 230VAC								
DC adjustment	range	±10% by potentiometer								
Overload	Range	110%~140%								
protection	Type	Hiccup mode, auto-recovery	Hiccup mode, auto-recovery							
Over voltage	Range	115%~145% rated output volta	115%~145% rated output voltage							
protection	Type	Shut down o/p voltage, re-power on to recover								
Withstand volt	age	I/P-O/P: 4kVAC, I/P-FG: 2kVA	C, O/P-FG: 1.25kVAC	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC						
Working tempe	erature	-30~+70°C (refer to output d	erating curve)	-25~+70°C (refer to output derating curve)						
Safety standards		16, BS EN/EN60335-1, CCC GE	1, BS EN/EN62368-1, BS EN/EN61558-1, EN61558-2- V/EN60335-1, CCC GB4943, BSMI CNS14336-1, EAC 4, AS/NZS60950-1 BIS IS13252(LRS-150),KC K60950- 0-12 only)approved							
			55014, EN61000-3-2(120W), 3, b/T 9254, EAC TP TC 020, BSMI							
Connection		7P/9.5mm pitch terminal block	(9P/9.5mm pitch terminal block						
Dimension (LxWxH) (mm)		159x 97x 30		215x 115x 30						

■ LRS-150 Series		Nus 📤	(() () () () () () () () () () () () ()	B K C	ϵ
Model No.	Output	Tol.	R&N	Effi.	
LRS-150-12	12V, 0~12.5A	±1%	150mV	87.5%	
LRS-150-15	15V, 0~10A	±1%	150mV	88.5%	
LRS-150-24	24V, 0~6.5A	±1%	200mV	89.0%	
LRS-150-36	36V, 0~4.3A	±1%	200mV	89.0%	

200mV

200mV

90.0%

90.0%

■ LRS-200 Series	(12V, 24V only)			SEACE.
Model No.	Output	Tol.	R&N	Effi.
LRS-200-3.3	3.3V, 0~40A	±3%	150mV	83.0%
LRS-200-4.2	4.2V, 0~40A	±4%	150mV	86.0%
LRS-200-5	5V, 0~40A	±3%	150mV	87.0%
LRS-200-12	12V, 0~17A	±1.5%	150mV	87.5%
LRS-200-15	15V, 0~14A	±1%	150mV	88.0%
LRS-200-24	24V, 0~8.8A	±1%	150mV	89.5%
LRS-200-36	36V, 0~5.9A	±1%	200mV	89.5%
LRS-200-48	48V, 0~4.4A	±1%	200mV	90.0%

■ LRS-150F	Series 🙆 🖯	HI c 911 us	C (C	BCACE	
Model No.	Output	Tol.	R&N	Effi.	
LRS-150F-5	5V, 0~22A	±2%	100mV	85.0%	
LRS-150F-12	12V, 0~12.5A	±1%	150mV	87.5%	
LRS-150F-15	15V, 0~10A	±1%	150mV	89.0%	
LRS-150F-24	24V, 0~6.5A	±1%	200mV	89.0%	
LRS-150F-36	36V, 0~4.3A	±1%	200mV	89.0%	

48V, 0~3.3A

48V, 0~3.3A

LRS-150-48

LRS-150F-48

Model No.	Output	Tol.	R&N	Effi.
LRS-350-3.3	3.3V, 0~60A	±4%	150mV	79.5%
LRS-350-4.2	4.2V, 0~60A	±4%	150mV	81.5%
LRS-350-5	5V, 0~60A	±3%	150mV	83.5%
LRS-350-12	12V, 0~29A	±1.5%	150mV	85.0%
LRS-350-15	15V, 0~23.2A	±1%	150mV	86.0%
LRS-350-24	24V, 0~14.6A	±1%	150mV	88.0%
LRS-350-36	36V, 0~9.7A	±1%	200mV	88.5%
LRS-350-48	48V, 0~7.3A	±1%	200mV	89.0%

© See : SAN ... SEE !!! SEE !!! (€

■ LRS-350 Series

Enclosed-G3 Series High Reliability Compact





■ Features

- No load power consumption <0.5W (RS-15~75)
- All using 105°C long life electrolytic capacitors
 Protections: Short circuit / Overload /
- Over voltage / Over Temp.(RS-15) Meet EMS EN50082-2/EN61000-6-2 heavy
- industry level (35~150W) Withstand 300VAC surge input for 5 sec.
- High operating temperature up to 70°C
- Withstand 5G vibration test
- Miniature size
- · Long life and high reliability
- · LED indicator for power on

						Suitable fo3 years was	or critical applic arranty	ations			
■ General Specific	cation (Blosso	rofor to unusu m	oanwall cor	m for dotai	lenes) 😝	S US Description of the second		®CB) KKC		
Model No.	RS-15	RS-25	RS-35 RD-35	III IOI detai	RS-50 RD / ID / T / Q-50	RS-75	(RS-15, 25, 50 only) (R RS-100 RD / ID / T / Q-85	RS-15/25) RS-150 RD / ID / T	/ Q-125		
AC input voltage range	85~264VAC, 120~370VDC	88~264VAC, 1	25~373VDC					115 / 230V/ by switch	AC		
AC inrush current (max.)	Cold start, 65A at 230VAC	30A at 230VAC			33A at 230VAC 48A at 230VAC (RD-5	0) 40A at 230VAC					
OC adjustment range	±10% by poter	ntiometer for si	ngle output;	; CH1 -5%	~+10% by potentiome	ter for multiple ou	tput				
Overload protection	>105%, hiccup mode	110%~180%			mode, auto-recovery			05)			
Over voltage protection	115%~135%, s	hut off	115%~135	% rated ou	itput voltage, hiccup	mode, auto-recove	ry				
Vithstand voltage	I/P - O/P: 3kVA	C, I/P - FG: 2k\	/AC, O/P - F	G: 0.5kVAC	, 1 minute						
Norking temperature	-20~+70°C				the derating curve for	r different models)					
/ibration	77-101 07-07	10min, /1 cvcl			ach along X, Y, Z axe						
Safety standards	UL62368-1, TU		68-1, CCC G		15, 25, 50 only), EAC T		S14336-1(RS-15/2	25, RD,RT, I	RQ only)		
EMC standards		32 class B, EN 0; GB9254 for			-4-2,3,4,5,6,8,11, EN	61000-6-2 (EN500	82-2) (35~150W); GB1762	5.1,		
Connection	Terminal block	for input and	output								
Dimension (LxWxH)(mm)	62.5x 51x 28	78x 51x 28	99x 82x 36		99x 97x 36	129x 98x 38	159x 97x 38	199x 98x	38		
■ 15W — Single Model No.	Output Output	Tol.	R&N Effi.	R&N Fffi	R&N	RS-50-15 RS-50-24 RS-50-48	15V, 0~3.4A 24V, 0~2.2A 48V, 0~1.1A	±1% ±1% ±1%	120mV 120mV 200mV	86.0° 88.0° 89.0°	
RS-15-3.3 3.	3V, 0~3.0A	±3%	80mV	72%	■ 75W — Sir		2170	2001117	00.0		
RS-15-12 1 RS-15-15 1 RS-15-24 2	5V, 0~3.0A 2V, 0~1.3A 5V, 0~1.0A 4V, 0~0.625A 8V, 0~0.313A	±1% ±1%	120mV 81% 120mV 81% 200mV 82%	120mV 81% 120mV 81% 200mV 82%	120mV 81% 120mV 81% 200mV 82%	ImV 81% ImV 81% ImV 82%	Model No. RS-75-3.3 RS-75-5 RS-75-12	Output 3.3V, 0~15A 5V, 0~12A 12V, 0~6.0A	Tol. ±3% ±2% ±1%	R&N 80mV 80mV 120mV	Effi 75.0° 79.0° 84.5°
■ 25W — Single	Output				RS-75-15 RS-75-24	15V, 0~5.0A 24V, 0~3.2A	±1% ±1%	120mV 120mV	86.0° 88.5°		
Model No.	Output	Tol.	R&N	Effi.	RS-75-48	48V, 0~1.6A	±1%	200mV	89.5		
RS-25-5	.3V, 0~6.0A 5V, 0~5.0A	±3% ±2%	80mV 80mV	73.5% 78.5%	■ 100W — S	- Single Output					
RS-25-15 1 RS-25-24 2	12V, 0~2.1A 15V, 0~1.7A 24V, 0~1.1A 18V, 0~0.57A	±1% ±1%	120mV 120mV 120mV 200mV	81.5% 83.5% 86.0% 85.0%	Model No. RS-100-3.3 RS-100-5	Output 3.3V, 0~20A 5V. 0~16A	Tol. ±3% ±2%	R&N 80mV 80mV	Eff 749 779		
■ 35W — Single	Output				RS-100-12	12V, 0~8.5A	±1%	120mV	81%		
Model No.	Output	Tol.	R&N	Effi.	RS-100-15	15V, 0~7.0A	±1%	120mV	82%		
	.3V, 0~7.0A	±3%	80mV	76.5%	RS-100-24	24V, 0~4.5A	±1%	120mV	84%		
RS-35-5	5V, 0~7.0A	±2%	80mV	80.5%	RS-100-48	48V, 0~2.3A	±1%	200mV	84%		
	12V, 0~3.0A 15V, 0~2.4A		120mV 120mV	84.5% 86.0%	■ 150W — S	ingle Output					
	24V, 0~1.5A		120mV	88.0%			T!	Devi			
	18V, 0~0.8A		200mV	88.5%	Model No. RS-150-3.3	Output	Tol. ±3%	R&N 80m\/	Eff 749		
■ 50W — Single	Output				RS-150-5.3	3.3V, 0~30A 5V, 0~26A	±3% ±2%	80mV 80mV	789		
		Tol	DOM	E46:	RS-150-12	12V, 0~12.5A		120mV	83%		
	Output 3V, 0~10A	Tol. ±3%	R&N 80mV	Effi. 78.0%	RS-150-15	15V, 0~10A	±1%	120mV	84%		
NO-50-5.5 5.	5V, 0~10A	±3%	90m\/	92 00/	RS-150-24	24V 0~6.5A	+1%	120mV	869		

83.0%

84.5%

RS-150-24

RS-150-48

24V, 0~6.5A

48V, 0~3.3A

±1%

±1%

120mV

200mV

86%

86%

5V, 0~10A

12V, 0~4.2A

±2%

±1%

80mV

120mV

RS-50-5

RS-50-12

Enclosed-G3 Series



■ 35W — Du	ual Output					■ 50W —	Quad Output (F	T-50 without	-5V or -12	V outp	ut)
Model No.	Output	Tol.	R&N	Effi.	Max.	Model No.	Output	Tol.	R&N	Effi.	Max.
RD-35A	5V, 0~4.0A	±2%	80mV	79%	32W	RQ-50B	5V, 0~6.0A	±2%	80mV	74%	46W
	12V, 0~1.0A	±6%	120mV				12V, 0~1.5A	±6%	120mV		
RD-35B	5V, 0~4.0A	±2%	80mV	82%	35W		-5V, 0~1.0A	±3%	100mV		
	24V, 0~1.3A	±5%	120mV				-12V, 0~1.0A	±3%	80mV		
RD-3513	13.5V, 0~2.0A	±4%	120mV	80%	35W	RQ-50C	5V, 0~6.0A	±2%	80mV	75%	50W
	-13.5V, 0~1.5A	±4%	120mV				15V, 0~1.5A	±6%	120mV		
■ 50W — Dı	ual Output (Ou	itnut isolat	ed for R	D-50A	/B)		-5V, 0~1.0A	±3%	100mV		
	au Output (90				, , ,	BO 50D	-15V, 0~1.0A	±3%	80mV	700/	EOW
Model No.	Output	Tol.	R&N	Effi.	Max.	RQ-50D	5V, 0~6.0A 12V, 0~1.5A	±2% ±6%	80mV 120mV	79%	53W
RD-50A	5V, 0~6.0A	±2%	80mV	79%	54W		24V, 0~1.0A	+7%, -5%	180mV		
	12V, 0~3.0A	±7%	120mV				-12V, 0~1.0A	±3%	80mV		
RD-50B	5V, 0~6.0A	±2%	80mV	80%	54W		124, 0 1.07	2070	Oomv		
	24V, 0~2.0A	±8%	120mV			■ 65W — 0	Quad Output (R	T-65 without	-5V or -12	V outp	ut)
■ 65W — Du	ual Output (Ou	ıtput isolat	ed for R	D-65A	/B)	Model No.	Output	Tol.	R&N	Effi.	Max
Model No.	Output	Tol.	R&N	Effi.	Max.	RQ-65B	5V, 0~8.0A	±2%	80mV	76%	63W
RD-65A	5V, 0~8.0A	±2%	80mV	78%	66W		12V, 0~3.0A	+9%, -5%	120mV		
ND-00A	12V, 0~4.0A	±6%	120mV	1070	0000		-5V, 0~1.0A	±5%	80mV		
RD-65B	5V, 0~8.0A	±2%	80mV	77%	68W		-12V, 0~1.0A	±5%	80mV		
ND COD	24V, 0~3.0A	+4%, -6%	150mV	1170	0011	RQ-65C	5V, 0~8.0A	±2%	80mV	76%	65W
							15V, 0~3.0A	+10%, -4%	120mV		
■ 85W — Du	ial Output (Ou	itput isolat	ed for R	D-85A	/B)		-5V, 0~1.0A	±5%	80mV		
Model No.	Output	Tol.	R&N	Effi.	Max.		-15V, 0~1.0A	±5%	80mV		
RD-85A	5V, 0~10A	±2%	80mV	78%	88W	RQ-65D	5V, 0~8.0A	±2%	80mV	78%	68W
	12V, 0~5.0A	±5%	120mV				12V, 0~3.0A	±6%	120mV		
RD-85B	5V, 0~10A	±2%	80mV	80%	88W		24V, 0~1.5A	±8%	180mV		
	24V, 0~2.5A	±5%	120mV				-12V, 0~1.0A	±5%	80mV		
■ 125W — D	ual Output						Quad Output (F	T-85 without			ut)
Model No.	Output	Tol.	R&N	Effi.	Max.	Model No.	Output	Tol.	R&N	Effi.	Max
RD-125A	5V, 0~15A	±5%	80mV	82%	131W	RQ-85B	5V, 0~10A	±2%	80mV	76%	81W
1207	12V. 0~10A	±7%	120mV	0270	10111		12V, 0~4.0A	+7%, -3%	120mV		
RD-125B	5V, 0~10A	±5%	80mV	85%	133W		-5V, 0~1.0A	±8%	100mV		
ND 120D	24V, 0~5.0A	±7%	120mV	0070	10011	DO 950	-12V, 0~1.0A 5V, 0~10A	±5%	80mV	770/	02141
						RQ-85C		±2%	80mV	77%	83W
■ 125W — D	oual Output (c	utput isola	ited for I	RID-12	5)		15V, 0~4.0A	+3%, -7%	120mV 100mV		
Model No.	Output	Tol.	R&N	Effi.	Max.		-5V, 0~1.0A -15V, 0~1.0A	±8% ±5%	80mV		
RD-125-1224	12V, 0~7.0A	±2%	120mV	85%	133W	RQ-85D	5V, 0~10A	±2%	80mV	78%	84W
	24V, 0~5.0A	+8%, -5%	200mV			NQ-00D	12V, 0~4.0A	+7%, -3%	120mV	1070	0411
RD-125-2412	24V, 0~5.0A	±2%	200mV	85%	133W		24V, 0~1.5A	±8%	150mV		
ND-120-2412				0070	100**		-12V, 0~1.0A	±5%	80mV		
	12V, 0~7.0A	±10%	120mV	1210.23	100 0000						
RD-125-1248	12V, 0~7.0A	±2%	120mV	86%	138W		Quad Output		ut -5V or	-12V oı	ıtput)
	48V, 0~2.5A	+8%, -5%	240mV			Model No.	Output	Tol.	R&N	Effi.	Max
RD-125-4812	48V, 0~2.5A	±2%	240mV	86%	138W	RQ-125B	5V, 0~12A	±2%	80mV	79%	120V
	12V, 0~7.0A	±10%	120mV				12V, 0~4.5A	+8%, -3%	120mV		
RD-125-2448	24V, 0~4.0A	±1%	200mV	86%	144W		-5V, 0~1.0A	+6%, -10%	80mV 80mV		
	48V, 0~2.5A	±4%	240mV			RQ-125C	-12V, 0~1.0A 5V, 0~12A	±5% ±2%	80mV	80%	123V
RD-125-4824	48V, 0~2.5A	±1%	240mV	86%	144W	NQ-1250	15V, 0~4.0A	±2% +8%, -3%	120mV	00%	1231
	24V, 0~4.0A	±8%	240mV				-5V, 0~4.0A	+6%, -10%	80mV		
DID 405 4005				000/	40514		-15V, 0~1.0A	±5%	80mV		
RID-125-1205	12V, 0~10.5A	±2%	120mV	80%	125W	RQ-125D	5V, 0~12A	±2%	80mV	82%	124V
	5V, 0~3.0A	±3%	80mV			1100	121/ 0-1 04	12/0	120m\/	02 /0	, Z ¬ V

83% 125W

12V, 0~4.0A

24V, 0~2.5A

-12V, 0~1.0A

±8%

±5%

+8%, -3% 120mV

150mV

80mV

24V, 0~5.3A

5V, 0~3.0A

RID-125-2405

±2%

±3%

120mV

80mV

Enclosed-SE Series 450~1500W Single Output





■ Features

- AC input selectable by switch (SE-600/1000) AC input 180~264VAC only (SE-1500)
- Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- Built-in remote sense function
- DC OK, remote ON/OFF control (SE-1000/1500)
- LED indicator for power on
- 2 years warranty



			100,000,000				
	SE-450	SE-600	SE-1000	SE-1500			
tage range	115/230VAC by switch	180~264VAC					
urrent (max.)	Cold start, 55A at 230VAC	Cold start, 60A at 230VAC	Cold start, 55A at 230VAC	Cold start, 60A at 230VAC			
ent range	±10% rated output voltage		,				
Range	105%~150%	105%~125%					
Туре	Shut down o/p voltage, re-power on to recover						
protection	115%~145%	115%~140% Shut down o/p voltage, re-power on to recover					
oltage	I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, I/P-O/P: 3kVAC, I/P-FG: 0.5kVAC, 2kVAC, O/P-FG: 0.5kVAC			I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC			
perature	-10~+60°C	-20~+60°C (refer to outpu	t derating curve)	-20~+70°C			
lards		,	12/24 only)approved,				
rds	BS EN/EN55032 class B, EN61000-3- 2,3, EN61000-4-2,3,4,5,6,8,11	Design refer to BS EN/EN55032 class B					
	9P/11mm pitch terminal block with cover	Terminal block with cover for	or input and output (SE-1000	0/1500: bus bars for output)			
LxWxH)(mm)	225x 124x 50	247x 127x 63.5	278x 127x 63.5	278x 177.8x 63.5			
			Itage range	Itage range			

■ 450W				SE-450
Model No.	Output	Tol.	R&N	Effi.
SE-450-3.3	3.3V, 0~75A	±3%	200mV	74%
SE-450-5	5V, 0~75A	±3%	200mV	78%
SE-450-12	12V, 0~37.5A	±1%	200mV	83%
SE-450-15	15V, 0~30A	±1%	200mV	84%
SE-450-24	24V, 0~18.8A	±1.5%	200mV	86%
SE-450-36	36V, 0~12.5A	±1%	200mV	86%
SE-450-48	48V, 0~9.4A	±1%	200mV	88%

				,-
SE-450-36	36V, 0~12.5A	±1%	200mV	86%
SE-450-48	48V, 0~9.4A	±1%	200mV	88%
■ 600W				SE-600
Model No.	Output	Tol.	R&N	Effi.
SE-600-5	5V, 0~100A	±2%	150mV	78%
SE-600-12	12V, 0~50A	±1%	150mV	83%
SE-600-15	15V, 0~40A	±1%	150mV	84%
SE-600-24	24V, 0~25A	±1%	150mV	87%
SE-600-27	27V, 0~22.2A	±1%	150mV	87%
SE-600-36	36V, 0~16.6A	±1%	200mV	87%
SE-600-48	48V, 0~12.5A	±1%	200mV	88%

			SE-1000
Output	Tol.	R&N	Effi.
5V, 0~150A	±1%	150mV	81%
9V, 0~100A	±1%	150mV	84%
12V, 0~83.3A	±1%	150mV	85%
15V, 0~66.7A	±1%	150mV	86%
24V, 0~41.7A	±1%	200mV	88%
48V, 0~20.8A	±1%	200mV	89%
	5V, 0~150A 9V, 0~100A 12V, 0~83.3A 15V, 0~66.7A 24V, 0~41.7A	5V, 0~150A ±1% 9V, 0~100A ±1% 12V, 0~83.3A ±1% 15V, 0~66.7A ±1% 24V, 0~41.7A ±1%	5V, 0~150A ±1% 150mV 9V, 0~100A ±1% 150mV 12V, 0~83.3A ±1% 150mV 15V, 0~66.7A ±1% 150mV 24V, 0~41.7A ±1% 200mV

■ 1500W				SE-1500
Model No.	Output	Tol.	R&N	Effi.
SE-1500-5	5V, 0~300A	±2%	150mV	81%
SE-1500-12	12V, 0~125A	±1%	150mV	85%
SE-1500-15	15V, 0~100A	±1%	150mV	85%
SE-1500-24	24V, 0~62.5A	±1%	150mV	87%
SE-1500-27	27V, 0~55.6A	±1%	150mV	88%
SE-1500-48	48V, 0~31.3A	±1%	150mV	89%

600~1000W Single Output





■ Features

- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage /

Over temperature

- Forced air cooling by built-in DC fan
- With DC OK Signal output
- Current sharing up to 2400W(PSP-600); 4000W (PSPA-1000)
- Built-in remote ON-OFF control
- Built-in remote sense function
- 3 years warranty (PSP-600)5 years warranty (PSPA-1000)



	(Flease refer to www.fleaffweff.com for detail spec.)	(PSP-600)			
	PSP-600	PSPA-1000			
age range	88~264VAC; 124~370VDC	90~264VAC ; 127~370VDC			
rrent (max.)	Cold start, 40A at 230VAC				
nt range	±10% rated output voltage	-8%~+17% rated output voltage			
Range	105%~135%				
Туре	Constant current limiting, auto-recovery				
protection	115%~140%	120%~137%			
Itage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC, 1 minute				
perature	-20~+60°C (refer to output derating curve)	-20~+70°C (refer to output derating curve)			
ards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1, AS/NZS62368.1 approved; GB4943 approved for PSP-600				
ds	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11; EAC TP TC 020; BSMI CNS13438				
	7+8P / 9.5mm pitch terminal block with cover				
xWxH)(mm)	170x 120x 93				
	rrent (max.) It range Range Type protection Itage perature ards	age range 88~264VAC; 124~370VDC rrent (max.) Cold start, 40A at 230VAC nt range ±10% rated output voltage Range 105%~135% Type Constant current limiting, auto-recovery protection 115%~140% Itage I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC, 1 minute perature -20~+60°C (refer to output derating curve) UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI C GB4943 approved for PSP-600 Its BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5, 7+8P / 9.5mm pitch terminal block with cover			

600W			P	SP-600
Model No.	Output	Tol.	R&N	Effi.
PSP-600-5	5V, 0~80.0A	±2%	180mV	79%
PSP-600-12	12V, 0~50.0A	±1%	240mV	84%
PSP-600-13.5	13.5V, 0~44.5A	±1%	240mV	85%
PSP-600-15	15V, 0~40.0A	±1%	240mV	85%
PSP-600-24	24V, 0~25.0A	±1%	240mV	86%
PSP-600-27	27V, 0~22.2A	±1%	240mV	86%
PSP-600-48	48V, 0~12.5A	±1%	300mV	87%

■ 1000W			PS	PA-1000
Model No.	Output	Tol.	R&N	Effi.
PSPA-1000-1	2 12V, 0~80A	±2%	150mV	92.0%
PSPA-1000-1	5 15V, 0~64A	±1.5%	150mV	93.0%
PSPA-1000-2	4 24V, 0~42A	±1%	200mV	93.5%
PSPA-1000-4	8 48V, 0~21A	±1%	250mV	94.0%

75~200W Low Profile





■ Features

- Ultra low profile: 30mm
- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature (RSP-100/150/200)
- · Cooling by free air convection
- Built-in constant current limiting circuit (RSP-75/100/150)
- Remote ON/OFF control (RSP-75/100/150)
- LED indicator for power on
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		RSP-75	RSP-100	RSP-150	RSP-200		
AC input voltage	range	85~264VAC; 120~370VDC			88~264VAC; 124~370VDC		
AC inrush curren	t (max.)	Cold start, 35A at 230VAC	30A at 230VAC	45A at 230VAC	40A at 230VAC		
DC adjustment ra	inge	-5%~+10% rated output voltage		±10% rated output voltage			
Overload	Range	105%~135%	105%~150%				
protection	Type	Constant current limiting, auto-re	ecovery	Hiccup mode, auto-recovery			
Over voltage	Range	110%~135%		115%~145%			
protection	Type	Shut down O/P voltage, re-powe	Shut down O/P voltage, re-power on to recover				
Withstand voltag	е	I/P-O/P: 4kVAC, I/P-FG: 2kVAC,	O/P-FG: 0.5kVA	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC			
Working tempera	ture	-25~+70°C	-30~+70°C (ref	er to output derat	ing curve)		
Safety standards			UL62368-1, TUV BS EN/EN62368-1, EN61558-1, EN61558-2-16, UL6236 CCC GB4943. EAC TP TC 004, BSMI CNS14336-1 approved EAC TP				
EMC standards		BS EN/EN55032 class B, EN610	00-3-2,3, EN6100	0-4-2,3,4,5,6,8,1	1; GB9254; EAC TP TC 020		
Connection		5P / 9.5mm pitch terminal block	7P / 9.5mm pitc	h terminal block	9P / 9.5mm pitch terminal block		
Dimension (LxWx	H) (mm)	159x97x30	179x99x30	199x99x30	215x115x30		

75W				RSP-75
Model No.	Output	Tol.	R&N	Effi.
RSP-75-3.3	3.3V, 0~15A	±2%	80mV	76.0%
RSP-75-5	5V, 0~15A	±2%	80mV	82.0%
RSP-75-7.5	7.5V, 0~10A	±2%	80mV	84.0%
RSP-75-12	12V, 0~6.3A	±2%	120mV	85.0%
RSP-75-13.5	13.5V, 0~5.6A	±2%	120mV	85.0%
RSP-75-15	15V, 0~5A	±2%	120mV	86.0%
RSP-75-24	24V, 0~3.2A	±1%	120mV	87.0%
RSP-75-27	27V, 0~2.8A	±1%	120mV	88.0%
RSP-75-48	48V, 0~1.6A	±1%	200mV	89.0%

■ 150W			R	SP-150
Model No.	Output	Tol.	R&N	Effi.
RSP-150-3.3	3.3V, 0~30A	±2%	100mV	81.5%
RSP-150-5	5V, 0~30A	±2%	100mV	87.0%
RSP-150-7.5	7.5V, 0~20A	±2%	100mV	88.5%
RSP-150-12	12V, 0~12.5A	±2%	100mV	89.0%
RSP-150-13.5	13.5V, 0~11.2A	±2%	100mV	87.5%
RSP-150-15	15V, 0~10A	±2%	100mV	88.5%
RSP-150-24	24V, 0~6.3A	±1%	150mV	89.0%
RSP-150-27	27V, 0~5.6A	±1%	150mV	89.5%
RSP-150-48	48V, 0~3.2A	±1%	250mV	90.0%

■ 100W			R	SP-100
Model No.	Output	Tol.	R&N	Effi.
RSP-100-3.3	3.3V, 0~20A	±2%	100mV	83.0%
RSP-100-5	5V, 0~20A	±2%	100mV	86.0%
RSP-100-7.5	7.5V, 0~13.5A	±2%	100mV	87.0%
RSP-100-12	12V, 0~8.5A	±1%	100mV	86.0%
RSP-100-13.5	13.5V, 0~7.5A	±1%	100mV	86.5%
RSP-100-15	15V, 0~6.7A	±1%	100mV	87.0%
RSP-100-24	24V, 0~4.2A	±1%	150mV	87.0%
RSP-100-27	27V, 0~3.8A	±1%	150mV	87.0%
RSP-100-48	48V, 0~2.1A	±1%	250mV	88.0%

200W			R	SP-200
Model No.	Output	Tol.	R&N	Effi.
RSP-200-2.5	2.5V, 0~40A	±2%	100mV	79.5%
RSP-200-3.3	3.3V, 0~40A	±2%	100mV	81.5%
RSP-200-4	4V, 0~40A	±2%	100mV	84.0%
RSP-200-5	5V, 0~40A	±2%	150mV	85.5%
RSP-200-7.5	7.5V, 0~26.7A	±2%	150mV	89.0%
RSP-200-12	12V, 0~16.7A	±1%	150mV	89.0%
RSP-200-13.5	13.5V, 0~14.9A	±1%	150mV	89.0%
RSP-200-15	15V, 0~13.4A	±1%	150mV	89.5%
RSP-200-24	24V, 0~8.4A	±1%	150mV	89.5%
RSP-200-27	27V, 0~7.5A	±1%	200mV	89.0%
RSP-200-36	36V, 0~5.56A	±1%	220mV	90.0%
RSP-200-48	48V, 0~4.2A	±1%	240mV	90.0%



320~500W Low Profile





■ Features

- 1U low profile
- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- Built-in remote sense and ON/OFF control (RSP-500)
- LED indicator for power on
- 3 years warranty



Model No.		RSP-320	RSP-500	
AC input volta	ge range	88~264VAC; 124~370VDC	85~264VAC; 120~370VDC	
AC inrush curi	ent (max.)	Cold start, 40A at 230VAC		
DC adjustment range		Vo: ±10% by potentiometer		
Overload	Range	105%~135%	105%~130%	
protection	Type	Hiccup mode, auto-recovery	Constant current limiting, auto-recovery	
Over voltage	Range	115%~145%		
protection	Type	Shut down O/P voltage, re-power on to recover		
Withstand volt	age	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC		
Working tempe	rature	-30~+70°C (refer to output derating curve)		
Safety standar	ds	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1,CCC GB4943.1,AS/NZS62368-1 approved		
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11,EN61000-6-2(RSP-500); EAC TP TC 020,GB9254		
0	Input	OD / O Same witch to we in all block	3P / 9.5mm pitch terminal block	
Connection	Output	9P / 9.5mm pitch terminal block	6P / 11mm pitch terminal block	
Dimension (LxWxH) (mm)		215x115x30	230x127x40.5	

■ 320W			R	SP-320
Model No.	Output	Tol.	R&N	Effi.
RSP-320-2.5	2.5V, 0~60A	±2%	100mV	75.5%
RSP-320-3.3	3.3V, 0~60A	±2%	100mV	79.5%
RSP-320-4	4V, 0~60A	±2%	100mV	81.0%
RSP-320-5	5V, 0~60A	±2%	150mV	83.0%
*RSP-320-5CC	5V, 0~60A	±2%	150mV	83.0%
RSP-320-7.5	7.5V, 0~40A	±2%	150mV	88.0%
RSP-320-12	12V, 0~26.7A	±1%	150mV	88.0%
RSP-320-13.5	13.5V, 0~23.8A	±1%	150mV	88.0%
RSP-320-15	15V, 0~21.4A	±1%	150mV	88.5%
RSP-320-24	24V, 0~13.4A	±1%	150mV	89.0%
RSP-320-27	27V, 0~11.9A	±1%	200mV	89.0%
RSP-320-36	36V, 0~8.9A	±1%	220mV	89.5%
RSP-320-48	48V, 0~6.7A	±1%	240mV	90.0%
	with conformal coatir ns, MOQ required.	ig is suitab	le for LED m	oving

500W			R	SP-500
Model No.	Output	Tol.	R&N	Effi.
RSP-500-3.3	3.3V, 0~90A	±2%	120mV	81.0%
RSP-500-4	4V, 0~90A	±2%	120mV	83.0%
RSP-500-5	5V, 0~90A	±2%	150mV	84.0%
RSP-500-12	12V, 0~41.7A	±1%	150mV	88.0%
RSP-500-15	15V, 0~33.4A	±1%	150mV	88.0%
RSP-500-24	24V, 0~21A	±1%	150mV	89.0%
RSP-500-27	27V, 0~18.6A	±1%	150mV	89.5%
RSP-500-48	48V, 0~10.5A	±1%	150mV	90.5%

100~320W 4 Output





■ Features

- Universal AC input / Full range
- Protections: Short circuit / Overload /
 Over voltage / Over temperature
- Over temperature protection (200~320W built-in, option for 150W)
- Built-in active PFC function
- Forced air cooling by built-in DC fan
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



				(p-::,	
Model No.		QP-150	QP-200	QP-320	
AC input voltage range AC inrush current (max.) DC adjustment range		90~264VAC; 127~370VDC			
		Cold start, 40A at 230VAC	Cold start, 50A at 230VAC	Cold start, 45A at 230VAC	
		CH1: -5%~+10% rated output voltage (CH1&2 for QP-150-3x, QP-150-D/F)	CH1&2: -5%~+10% rated output voltage		
Overload	Range	105%~150%	'		
protection	Туре	Hiccup mode, auto-recovery	Constant current limiting, auto-recovery	Fold back current limiting, auto-recovery	
Over voltage	e protection	115%~135% for CH1 or CH1&2			
Withstand v	oltage	I/P - O/P: 3kVAC, I/P - FG: 2kVAC, O/P - FG:0.5kVAC, 1 minute			
Working tem	perature	-10~+60°C (refer to output derating curve)		-10~+70°C	
Setup, rise,	hold up time	800ms, 60ms, 24ms at full load and 30VAC(TP-100/150); 1800ms, 50ms, 24ms at full load and 230VAC (QP-150)	800ms, 50ms, 24ms at full load and 230VAC	800ms, 50ms, 16ms at ful load and 230VAC	
Safety stand	lards	UL62368-1, TUV BS EN/EN62368-1 approved			
EMC standards Connection Dimension (LxWxH)(mm)		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11			
		9P/7.62mm pitch terminal block with cover	9P/9.5mm pitch terminal blo	ck with cover	
		199x 99x 50	215x 115x 50		

■ 150W — Quad Output

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-150B	5V, 3.0~15A	±3%	100mV	76%	150W
	12V, 0.4~5.0A	±6%	150mV		
	-12V, 0.3~2.0A	+10%,-6%	150mV		
	-5V, 0.0~1.0A	±5%	100mV		
QP-150C	5V, 3.0~15A	±3%	100mV	77%	153W
	15V, 0.4~4.0A	+6%,-10%	150mV		
	-15V, 0.3~2.0A	±8%	150mV		
	-5V, 0.0~1.0A	±5%	100mV		

Model No.	Output	Tol.	R&N	Effi.	Max.
QP-150D	5V, 3.0~15A	±3%	120mV	78%	150W
	12V, 0.0~5.0A	±3%	150mV		
	24V, 0.4~3.0A	±6%	200mV		
	-12V, 0.0~1.0A	±5%	150mV		
QP-150F	5V, 3.0~15A	±3%	120mV	78%	152W
	15V, 0.0~5.0A	±3%	150mV		
	24V, 0.4~3.0A	±6%	200mV		
	-15V, 0.0~1.0A	±5%	150mV		

QP-320F

5V, 2.5~20A

15V, 0.0~10A

24V, 0.2~5.0A

-15V, 0.2~1.6A

Enclosed-PFC



■ 150W — Quad Output Model No. Tol. R&N Output Effi. Max. QP-150-3A 5V, 3.0~15A ±3% 100mV 73% 146W 3.3V, 0.0~15A ±3% 100mV 12V, 0.4~5.0A ±6% 150mV -5V, 0.0~1.0A 150mV ±5% QP-150-3B 5V, 3.0~15A ±3% 100mV 75% 150W 3.3V, 0.0~15A ±3% 100mV 12V, 0.4~5.0A 150mV ±6% -12V, 0.0~1.0A ±5% 150mV QP-150-3C 5V, 3.0~15A ±3% 100mV 74% 152W 3.3V, 0.0~15A ±3% 100mV 150mV 15V. 0.4~5.0A +8%,-6% -15V, 0.0~1.0A ±5% 150mV QP-150-3D 5V, 3.0~15A ±3% 100mV 76% 150W 100mV 3.3V, 0.0~15A +3%

■ 200W —	Quad Output				
Model No.	Output	Tol.	R&N	Effi.	Max.
QP-200D	5V, 3.0~20A	±3%	100mV	75%	203W
	12V, 0.0~7.0A	±3%	150mV		
	24V, 0.4~6.0A	+10%,-6%	150mV		
	-12V, 0.0~1.0A	±6%	150mV		
QP-200F	5V, 3.0~20A	±3%	100mV	75%	203W
	15V, 0.0~6.0A	±3%	150mV		
	24V, 0.4~6.0A	+10%,-6%	150mV		
	-15V, 0.0~1.0A	±6%	150mV		
= 220W	Ouad Output				
320VV —	Quad Output				
Model No.	Output	Tol.	R&N	Effi.	Max.
QP-320D	5V, 2.5~20A	±3%	100mV	83%	316W
	12V, 0.0~10A	±3%	150mV		
	24V, 0.2~5.0A	+10%,-6%	150mV		
	-12V, 0.2~2.0A	±10%	150mV		

2750W Laser Diode PWM Driver Module

±6%

±5%

150mV

150mV

24V, 0.3~3.0A

-12V, 0.0~1.0A



■ Features

- Output current 0~50A
- · Compliance voltage to 55V
- · 2.75kW maximum output power
- High efficiency up to 96%
- Short rise/fall time (2µs for fast mode)
- · Continue wave application
- Low current ripple <1Arms
- Dimension(LxWxH): 250x 100x 41mm
- 5 years warranty



225x 124x 41mm(600W)

• Dimension(LxWxH): 225x 124x 35mm(450W)

· 3 years warranty

±3%

±3%

+10%,-6%

±10%

100mV

150mV

150mV

150mV

83% 316W

75~150W High Reliability





■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- · Built-in active PFC function
- Protections:

Short circuit / Overload / Over voltage / Over temperature (optional for HRP-75 / HRP-100)

- · Built-in constant current limiting circuit
- Built-in remote sense function (HRP□-150)
- No load power consumption<0.5W (except for HRP-150)
- Built-in remote ON/OFF control (except for HRP-150)
- Built-in 5V / 0.3A standby output (HRPG-150)
- Cooling by free air convection
- 1U low profile
- LED indicator for power on
- 5 years warranty



Ochlera	Opcomout	TOTI (I lease refer to www.ineanwen.com for de	(HRP only)	Soo CAC		
Model No. AC input voltage range		HRP-75	HRP-100	HRP □-150		
		85~264VAC; 120~370VDC				
AC inrush o	urrent (max.)	Cold start, 65A at 230VAC		Cold start; 70A at 230VAC		
DC adjustment range		-5%~+10% rated output voltage		±15% rated output voltage		
Overload	Range	105%~135%				
protection	Туре	Constant current limiting, auto-recovery				
Over voltag	e protection	115%~145%				
Withstand v	/oltage	I/P-O/P: 3kVAC, I/P-FG: 1.5kVAC, O/P-FG: 0.5kVAC, 1 minute				
Working ter	nperature	-40~+70°C (refer to output derating curve)	-40~+60°C	-40~+70°C		
Safety stan	dards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, AS/NZS62368.1 approved				
EMC standards		BS EN/EN55032 class B, EN61000-4-2,3,4,5 EAC TP TC 020	S EN/EN55032 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN55024, EN61000-6-2 heavy industry level AC TP TC 020			
Connection		5P/9.5mm pitch terminal block with cover	7P/9.5mm pitch terminal block with cover			
Dimension (LxWxH)(mm) 129x98x38 159x97x38						

■ 75W				HRP-75
Model No.	Output	Tol.	R&N	Effi.
HRP-75-3.3	3.3V, 0~15A	±2.5%	80mV	77.0%
HRP-75-5	5V, 0~15A	±2.5%	80mV	82.5%
HRP-75-7.5	7.5V, 0~10A	±2.5%	100mV	84.0%
HRP-75-12	12V, 0~6.3A	±1.5%	120mV	87.0%
HRP-75-15	15V, 0~5A	±1.5%	150mV	88.0%
HRP-75-24	24V, 0~3.2A	±1.5%	150mV	88.5%
HRP-75-36	36V, 0~2.1A	±1.5%	200mV	89.0%
HRP-75-48	48V, 0~1.6A	±1.5%	240mV	89.0%

100W			F	IRP-100
Model No.	Output	Tol.	R&N	Effi.
HRP-100-3.3	3.3V, 0~20A	+2.5%, -3.5%	80mV	78.0%
HRP-100-5	5V, 0~17A	±2.5%	80mV	83.0%
HRP-100-7.5	7.5V, 0~13.5A	±2.5%	100mV	84.0%
HRP-100-12	12V, 0~8.5A	±1.5%	120mV	87.5%

Model No.	Output	Tol.	R&N	Effi.
HRP-100-15	15V, 0~7A	±1.5%	150mV	88.0%
HRP-100-24	24V, 0~4.5A	±1.5%	150mV	88.5%
HRP-100-36	36V, 0~2.9A	±1.5%	200mV	89.0%
HRP-100-48	48V, 0~2.2A	±1.5%	240mV	90.0%

150W			HRI	P□-150
Model No.	Output	Tol.	R&N	Effi.
HRP□-150-3.3	3.3V, 0~30A	±2.5%	80mV	78.5%
HRP□-150-5	5V, 0~26A	±2.5%	80mV	85.0%
HRP□-150-7.5	7.5V, 0~20A	±2.5%	100mV	87.0%
HRP□-150-12	12V, 0~13A	±1.5%	120mV	88.0%
HRP□-150-15	15V, 0~10A	±1.5%	150mV	88.0%
HRP□-150-24	24V, 0~6.5A	±1.5%	150mV	88.0%
HRP□-150-36	36V, 0~4.3A	±1.5%	200mV	89.0%
HRP□-150-48	48V, 0~3.3A	±1.5%	240mV	89.0%
□=blank, G; blank	: basic function,	G: with 5Vsb	& no load <	0.5W

200~450W High Reliability





■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Protections: Short circuit / Overload /

Over voltage / Over temperature

- Built-in constant current limiting circuit
- Built-in remote sense function
- Built-in DC OK signal
- No load power consumption<0.5W (HRPG-300/450)
- Built-in remote ON/OFF control & 5V / 0.3A standby output (HRPG series)
- Forced air cooling by built-in DC fan
- 1U low profile
- 5 years warranty



		(1 loads for to www.moanwomsom for actain open)	(HRP only)	LIII. UD CA	
Model No.		HRP □-200	HRP □-300	HRP □-450	
AC input voltage range		85~264VAC; 120~370VDC			
AC inrush c	urrent (max.)	Cold start, 70A at 230VAC			
DC adjustm	ent range	±15% rated output voltage			
Overload	Range	105%~135%			
Protection	Type	Constant current limiting, auto-recovery			
Over voltage protection		115%~145%			
Withstand voltage I/P - O/P: 3kVAC, I/P - FG: 1.5kVAC, O/P - FG: 0.5kVAC, 1 minute I/P - O/P: 3kVAC, I/P - FG: 2kVAC, O/P - FG: 0.5kVAC, 1 minute		/AC,			
Working ten	perature	-40~+70°C (refer to output derating curve)			
Safety stand	lards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, AS/NSZ62368.1 approved			
EMC standards		BS EN/EN55032 class B, EN61000-4- 2,3,4,5,6,8,11, EN61000-3-2,3, EN55024, EN61000-6-2 heavy industry level; EAC TP TC 020	BS EN/EN55032 class B, EN61000-4-2,3,4,5,6,8,11, E 3-2,3, EN61000-6-2 heavy industry level; EAC TP TC AS/NSZ62368.1		
Connection		7P/9.5mm pitch terminal block with cover	7P/11mm	3+6P/10&11mm	
Dimension (LxWxH)(mm)		199x 98x 38	199x105x41	218x105x41	

200W			HR	P□-200
Model No.	Output	Tol.	R&N	Effi.
HRP□-200-3.3	3.3V, 0~40A	±2%	80mV	80.0%
HRP□-200-5	5V, 0~35A	±2%	90mV	84.0%
HRP□-200-7.5	7.5V, 0~26.7A	±2%	100mV	86.0%
HRP□-200-12	12V, 0~16.7A	±1%	120mV	88.0%
HRP□-200-15	15V, 0~13.4A	±1%	150mV	88.0%
HRP□-200-24	24V, 0~8.4A	±1%	150mV	88.0%
HRP□-200-36	36V, 0~5.7A	±1%	250mV	89.0%
HRP□-200-48	48V, 0~4.3A	±1%	250mV	89.0%
=blank, G; blank	basic function,	G: with 5Vsb	& no load	<0.5W

300W			HRF	2□-300
Model No.	Output	Tol.	R&N	Effi.
HRP□-300-3.3	3.3V, 0~60A	±2.5%	80mV	80.0%
HRP□-300-5	5V, 0~60A	±2.0%	90mV	82.0%
HRP□-300-7.5	7.5V, 0~40A	±2.0%	100mV	86.0%
HRP□-300-12	12V, 0~27A	±1.0%	120mV	88.0%
□=blank, G; blank	: basic function,	G: with 5Vsb	& no load <	0.5W

Model No.	Output	Tol.	R&N	Effi.
HRP□-300-15	15V, 0~22A	±1.0%	150mV	88.0%
HRP□-300-24	24V, 0~14A	±1.0%	150mV	87.0%
HRP□-300-36	36V, 0~9A	±1.0%	250mV	88.0%
HRP□-300-48	48V, 0~7A	±1.0%	250mV	89.0%
□=blank, G; blank	: basic function,	G: with 5Vsb	& no load <	0.5W

■ 450W			HRF	2□-450
Model No.	Output	Tol.	R&N	Effi.
HRP□-450-3.3	3.3V, 0~90A	±2%	80mV	80.0%
HRP□-450-5	5V, 0~90A	±2%	80mV	83.0%
HRP□-450-7.5	7.5V, 0~60A	±2%	100mV	86.5%
HRP□-450-12	12V, 0~37.5A	±1%	120mV	88.0%
HRP□-450-15	15V, 0~30A	±1%	150mV	89.0%
HRP□-450-24	24V, 0~18.8A	±1%	150mV	88.0%
HRP□-450-36	36V, 0~12.5A	±1%	240mV	89.0%
HRP□-450-48	48V, 0~9.5A	±1%	240mV	89.5%
□=blank, G; blank	c: basic function, G:	with 5Vsb	& no load <	0.5W



600~1000W High Reliability





Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Protections: Short circuit / Overload /
 Over voltage / Over temperature
- Built-in constant current limiting circuit
- Built-in remote sense function
- Built-in DC OK signal
- No load power consumption<0.75W
- Built-in remote ON/OFF control & 5V / 0.3A standby output (HRPG series)
- Built-in current sharing (HRPG-600-24/36/48; HRPG-1000)
- Forced air cooling by built-in DC fan
- 5 years warranty

General :	Specification	(Please refer to www.meanwell.com for detail spec.)	Cept for HRPG-600) US A SECOND		
Model No.		HRP □-600	HRPG-1000		
AC input vo	Itage range	85~264VAC; 120~370VDC	90~264VAC; 127~370VDC		
AC inrush c	urrent (max.)	Cold start, 70A at 230VAC	Cold start, 40A at 230VAC		
DC adjustm	ent range	±15% rated output voltage	-8%~+17% rated output voltage		
Overload	Range	105%~135%			
Protection	Туре	Constant current limiting, auto-recovery			
Over voltag	e protection	115%~145%	120%~137%		
Withstand v	oltage	I/P - O/P: 3kVAC, I/P - FG: 2kVAC, O/P - FG: 0.5kVAC, 1 minute			
Working ten	nperature	-40~+70°C (refer to output derating curve)			
Safety stan	dards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, AS/NSZ62368.1 approved			
EMC standards		BS EN/EN55032 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN61000-6-2 heavy industry level, EAC TP TC 020, AS/NSZ62368.1	BS EN/EN55032 class A, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EAC TP TC 020, AS/NSZ62368.1		
Connection		3+6P/10&11mm pitch terminal block with cover			
Dimension ((LxWxH)(mm)	218x105x63.5			

600W			HRF	P□-600
Model No.	Output	Tol.	R&N	Effi.
HRP□-600-3.3	3.3V, 0~120A	±2%	120mV	78.5%
HRP□-600-5	5V, 0~120A	±2%	150mV	82.0%
HRP□-600-7.5	7.5V, 0~80A	±2%	150mV	87.0%
HRP□-600-12	12V, 0~53A	±1%	150mV	88.0%
HRP□-600-15	15V, 0~43A	±1%	150mV	88.0%
HRP□-600-24	24V, 0~27A	±1%	150mV	88.0%
HRP□-600-36	36V, 0~17.5A	±1%	200mV	89.0%
HRP□-600-48	48V, 0~13A	±1%	240mV	89.0%
□=blank, G; blank	: basic function, G: v	vith 5Vsb	& no load <	0.75W

1000W			HRP	G-1000
Model No.	Output	Tol.	R&N	Effi.
HRPG-1000-12	12V, 0~80A	±2%	150mV	91.5%
HRPG-1000-15	15V, 0~64A	±1.5%	150mV	92.0%
HRPG-1000-24	24V, 0~42A	±1%	200mV	93.0%
HRPG-1000-48	48V, 0~21A	±1%	250mV	94.0%

150~600W Peak Power





■ Features

- Universal AC input/ Full range
- Built-in active PFC function, PF>0.95
- 250% peak power capability
- High efficiency up to 89%
- Withstand 300VAC surge input for 5 seconds
- Protections:

Short circuit / Overload / Over voltage / Over temperature

- Cooling by free air convection
- Built-in constant current limiting circuit
- 1U low profile 38mm (HRP-150N); 41mm (HRP-300N)
- Built-in remote sense function
- 5 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		HRP-150N	HRP-300N	HRP-600N		
AC input vo	Itage range	85~264VAC; 120~370VDC				
AC inrush c	urrent (max.)	Cold start, 70A at 230VAC				
DC adjustm	ent range	±15% rated output voltage				
Overload	Range	105%~135%				
protection	Туре	Constant current limiting, auto-recovery				
Over voltage protection		115%~145%				
Withstand v	oltage	I/P - O/P: 3kVAC, I/P - FG: 2kVAC, O/P - FG: 0.5kVAC, 1 minute				
Working ten	nperature	-40~+70°C (refer to output derating curve)				
Safety stan	dards	UL62368-1, TUV EN62368-1, EAC TP TC 004 approved				
EMC standards		Compliance to EN55032 (CISPR32) Class B, EN61000-3-2,-3, EAC TP TC 020; Compliance to EN61000-4-2,3,4,5,6,8, 11, EN55024, EN61000-6-2, heavy industry level, criteria A, EAC TP TC 020				
Connection		7P/9.5mm pitch terminal block with cover	7P/11mm pitch terminal block with cover	3+6P/10&11mm pitch terminal block with cover		
Dimension (LxWxH)(mm)		159x 97x 38	199x 105x 41	218x 105x 63.5		

150W			ЦВ	D 4EON
15000			пк	P-150N
Model No.	Output	Tol.	R&N	Effi.
HRP-150N-12	12V, 0~13A	±1.5%	120mV	88%
HRP-150N-24	24V, 0~6.5A	±1.5%	150mV	88%
HRP-150N-36	36V, 0~4.3A	±1.5%	200mV	89%
HRP-150N-48	48V, 0~3.3A	±1.5%	240mV	89%

■ 600W			HR	P-600N
Model No.	Output	Tol.	R&N	Effi.
HRP-600N-12	12V, 0~53A	±1%	150mV	88%
HRP-600N-24	24V, 0~27A	±1%	150mV	88%
HRP-600N-36	36V, 0~17.5A	±1%	200mV	89%
HRP-600N-48	48V, 0~13A	±1%	240mV	89%

300W	HR	P-300N		
Model No.	Output	Tol.	R&N	Effi.
HRP-300N-12	15V, 0~27A	±1%	120mV	88%
HRP-300N-24	24V, 0~14A	±1%	150mV	87%
HRP-300N-36	36V, 0~9A	±1%	250mV	88%
HRP-300N-48	48V, 0~7A	±1%	250mV	89%

HRP vs. HRP-N/N3

Difference Series	Peak Power
HRP-150/300/600	100%
HRP-150N/300N/600N	250%
Coming Soon HRP-150N3/300N3/600N3	300~350%

Enclosed-PFC 750~2000W Programmable High Power





Features

- 1U low profile (41mm)
- Universal AC input / Full range
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- High power density up to 25W/in³ (RSP-1600)
- Output voltage programmable
- Constant current level Icc programmable (RSP-750/1600)
- Built-in current sharing up to 4 units (RSP-1000/2000) or 6 units (RSP-1600)
- Built-in remote sense and ON/OFF control
- Built-in auxiliary power, DC OK signal
- OTP alarm signal output (RSP-1600/2000)
- Optional conformal coating
- 5 years warranty

■ General Specification



Model No.		RSP-750	RSP-1000	RSP-1600	RSP-2000		
AC input voltage range		90~264VAC; 127~370VDC			90~264VAC; 127~320VDC		
AC inrush cu	rrent (max.)	Cold start, 40A at 230VAC		Cold start, 35A at 230VAC	Cold start, 50A at 230VAC		
DC adjustment range		Vo: ±10% by potentiometer, or to 40%~110% of rated output voltage by 2~5.5VDC external control signal Icc: to 40%~110% of rated output current by 2~5.5VDC external control signal	Vo: ±10% by potentiometer, or to 40%~110% of rated output voltage by external resistor or by 2~5.5VDC external control signal	Vo: -1%~+22.5% by potentiometer, or to 40%~ 125% of rated output voltage by 1~5VDC external control signal Icc: to 20%~100% of rated output current by 1~5VDC external control signal	Vo: ±10% by potentiometer, or to 40%~115% of rated output voltage by 1~4.7VDC external control signal		
Overload	Range	105%~125%	105%~125%	105%~115%	105%~125%		
protection	Type	Constant current limiting, auto	o-recovery	Constant current limiting, shut down o/p voltage after 5 sec. , re-power on to recover			
Over voltage	Range	115%~145%	115%~135%	130%~155%	120%~145%		
protection	Туре	Shut down O/P voltage, re-power on to recover					
Withstand vo	Itage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC (O/P-FG: 1.5kVAC for RSP-1600)					
Working tem	perature	-30~+70°C	-20~+60°C	-30~+70°C	-35~+70°C		
Safety standards		UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1 approved					
EMC standards		BS EN/EN55032 class B for RSP-750, class A for RSP-1000/1600/2000; EN61000-3-2,3; EN61000-4-2,3,4,5,6,8,11, EN61204-3					
Connection	Input	3P / 10mm pitch terminal bloc	k with cover				
Connection	Output	M5x12 screw terminal		Bus bars	M5x12 screw terminal		
Dimension (L	xWxH) (mm)	250x127x41	295x 127x 41	300x 85x 41	295x 127x 41		

■ 750W			R	SP-750
Model No.	Output	Tol.	R&N	Effi.
RSP-750-5	5V, 0~100A	±2%	150mV	82.0%
RSP-750-12	12V, 0~62.5A	±1%	150mV	87.0%
RSP-750-15	15V, 0~50A	±1%	150mV	89.0%
RSP-750-24	24V, 0~31.3A	±1%	150mV	90.5%
RSP-750-27	27V, 0~27.8A	±1%	150mV	90.5%
RSP-750-48	48V, 0~15.7A	±1%	150mV	92.0%

■ 1600W			RS	SP-1600
Model No.	Output	Tol.	R&N	Effi.
RSP-1600-12	12V, 0~125A	±1%	150mV	89.0%
RSP-1600-24	24V, 0~67A	±1%	200mV	91.5%
RSP-1600-27	27V, 0~59A	±1%	200mV	92.0%
RSP-1600-36	36V, 0~44.5A	±1%	250mV	92.0%
RSP-1600-48	48V, 0~33.5A	±1%	300mV	93.0%

■ 1000W			RS	P-1000
Model No.	Output	Tol.	R&N	Effi.
RSP-1000-12	12V, 0~60A	±1%	150mV	83%
RSP-1000-15	15V, 0~50A	±1%	150mV	85%
RSP-1000-24	24V, 0~40A	±1%	150mV	88%
RSP-1000-27	27V, 0~37A	±1%	150mV	88%
RSP-1000-48	48V, 0~21A	±1%	150mV	90%

2000W RSP-2000						
Model No.	Output	Tol.	R&N	Effi.		
RSP-2000-12	12V, 0~100A	±2%	150mV	87.0%		
RSP-2000-24	24V, 0~80A	±1%	200mV	90.5%		
RSP-2000-48	48V, 0~42A	±1%	300mV	92.0%		

Enclosed-PFC 1500~3000W Programmable High Power





■ Features

- Universal AC input / Full range (RSP-1500) AC input 180~264VAC only (RSP3000)
- Built-in active PFC function
- Protections:
- Short circuit / Overload / Over voltage / Over temperature
- Forced air cooling by built-in DC fan
- Output voltage programmable
- Built-in current sharing up to 4 units (RSP-1500) or 3 units (RSP-3000)
- Built-in remote sense and ON/OFF control
- Built-in auxiliary power, DC OK signal
- Optional conformal coating
- 5 years warranty



Model No.		RSP-1500	RSP-2400	RSP-3000		
AC input voltage range		90~264VAC; 127~370VDC	180~264VAC; 254~370VDC			
AC inrush current (max.)		Cold start, 60A at 230VAC				
DC adjustment range		Vo: -30%~+10% by potentiometer, or to 70%~100% of rated output voltage by external resistor	Vo: ±10% by potentiometer, or to 20%~110% of rated output voltage 1~5.5VDC external control signal			
Overleed	Range	105%~135%	100%~112%			
Overload protection Type		Constant current limiting, shut off after 5 sec., re-power on to recover	Constant current limiting, shut off after 5 sec., re-power on to recover (can adjust to continuous constant current limiting)			
Over voltage	Range	115%~140%				
protection	Туре	Shut down O/P voltage, re-power on to recover				
Withstand vo	Itage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC				
Working tem	perature	-20~+70°C				
Safety standa	ards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1 approved				
EMC standar	ds	BS EN/EN55032, EN61000-3-2,3; EN61000-4-2,3,4,5,6,8,11, EN61000-6-2, EN061204-3				
Input		3P/13mm pitch terminal block with cover				
Connection	Output	Bus bars				
Dimension (LxWxH) (mm)		278x 127x 83.5	278x 177.8x 63.5			

1500W	RS	P-1500		
Model No.	Output	Tol.	R&N	Effi.
RSP-1500-5	5V, 0~240A	±2%	150mV	80%
RSP-1500-12	12V, 0~125A	±1%	150mV	87%
RSP-1500-15	15V, 0~100A	±1%	150mV	87%
RSP-1500-24	24V, 0~63A	±1%	150mV	90%
RSP-1500-27	27V, 0~56A	±1%	150mV	90%
RSP-1500-48	48V, 0~32A	±1%	200mV	91%

2400W			R	RSP-2400
Model No.	Output	Tol.	R&N	Effi.
RSP-2400-12	12V, 0~166.7A	±1%	150mV	88.0%
RSP-2400-24	24V, 0~100A	±1%	150mV	90.5%
RSP-2400-48	48V, 0~50A	±1%	200mV	91.5%
■ 3000W			F	RSP-3000
				(0) 0000
Model No.	Output	Tol.	R&N	Effi.
RSP-3000-12	12V, 0~200A	±1%	150mV	87.5%
RSP-3000-24	24V, 0~125A	±1%	150mV	90.0%

Enclosed-PFC 3000W High Voltage Output with Programmable





■ Features

- AC input 180~264VAC only
- Built-in active PFC function
- High efficiency up to 93%
- Protections:

Short circuit / Overload / Over voltage / Over temperature

- Forced air cooling by built-in DC fan
- Output voltage and current programmable
- Built-in current sharing up to 3 units
- Built-in remote ON/OFF control
- Built-in auxiliary power, DC OK signal
- Optional conformal coating
- 5 years warranty



Model No.		CSP-3000			
AC input voltage rang	je	180~264VAC; 254~370VDC			
AC inrush current (ma	ax.)	Cold start, 60A at 230VAC			
DC adjustment range		Vo: ±10% by potentiometer, or to 20%~110% of rated output voltage by 2~10VDC external control signal			
	Range	105%~120%			
Overload protection	Туре	Constant current limiting with delay shutdown after 3 seconds, re-power to recover			
Over voltage	Range	105%~125%			
protection	Туре	Shut dowm o/p voltage, re-power on to recover			
Withstand voltage		I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC			
Working temperature		-20~+70°C			
Safety standards		UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1, GP4943.1 approved			
EMC standards		BS EN/EN55032, EN61000-3-2,3; EN61000-4-2,3,4,5,6,8,11, EN61000-6-2, EN61204-3			
Connection	Input	3P/13mm pitch terminal block with cover			
Connection	Output	2P/16mm pitch terminal block with cover			
Dimension (LxWxH) (r	mm)	278x 177.8x 63.5			

■3000W						
Model No.	Output	Tol.	R&N	Effi.		
CSP-3000-120	120V, 0~25A	±1%	800mV	92.0%		
CSP-3000-250	250V, 0~12A	±1%	1000mV	92.5%		
CSP-3000-400	400V, 0~7.5A	±1%	1200mV	93.0%		

Enclosed-PFC 5000~7500W Programmable High Power





■ Features

- 3ϕ 3-wire/ \triangle 230VAC or 3ϕ 4-wire/ Y 380VAC
- Built-in active PFC function
- High efficiency up to 92.5%
- Protections:

Short circuit / Overload / Over voltage / Over temperature / Fan alarm

- Forced air cooling by built-in DC fan
- Output voltage and constant current level Icc programmable

- Built-in current sharing up to 4 units
- Built-in remote sense and ON/OFF control
- Built-in 12V/0.1A auxiliary power
- Alarm signal output
- 5 years warranty



	1		- O TIEST IN OPERI				
Model No.		RST-5000	RST-7K5				
AC input voltaç	ge range	3ϕ 3-wire/ \triangle 196~305VAC or 3ϕ 4-wire/ Y 340~530VAC					
AC inrush current (max.)		Cold start, 75A at 230Vac (3 ϕ 3-wire/ \triangle)or 50A at 400Vac (3 ϕ 4-wire/ Y)	Cold start, 75A at 230Vac (3 ϕ 3-wire/ \triangle)or 50A at 230Vac (3 ϕ 4-wire/ Y)				
DC adjustment range		Vo: 24V-23.5~28.8V, 36V-35~43.2V, 48V-47~57.6V by VR, 20~120% by 1~6VDC Icc: 20~100% by 1~5VDC	Vo: 115V-90~138V, 230V-170~260V, 380V-334~400V by VF or 1~120% by 1~6VDC Icc: 20~100% by 1~4.8VDC				
0	Range	100%~112%	100%~105%				
Overload protection Type		User adjustable continuous constant current limiting or constant current limiting with delay shutdown after 5 seconds. Re-power on to recover.					
Over voltage	Range	125%~145%					
protection	Туре	Shut down O/P voltage, re-power on to recover					
Withstand volta	age	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC					
Working tempe	rature	-30~+70°C (refer to output derating curve)					
Safety standar	ds	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved					
EMC standards		BS EN/EN55032 class A, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2, EN61204-3	BS EN/EN55032/EN55011 conducted class B, EN55032/ EN55011 Rediated class A,EN61000-3-2,3, EN61000-4- 2,3,4,5,6,8,11, EN61000-6-2, EN61204-3				
	Input	6P/13mm pitch terminal block with cover					
Connection	Output	Bus bars					
Dimension (LxV	VxH) (mm)	460x 211x 83.5					

5000W			R	ST-5000
Model No.	Output	Tol.	R&N	Effi.
RST-5000-24	24V, 0~200A	±1%	150mV	89%
RST-5000-36	36V, 0~138A	±1%	200mV	90%
RST-5000-48	48V, 0~105A	±1%	200mV	91%

7500W			Coming Soon	RST-7K5
Model No.	Output	Tol.	R&N	Effi.
RST-7K5-115	115V, 0~65.2A	±1%	1V	91%
RST-7K5-230	230V, 0~34.7A	±1%	2V	92%
RST-7K5-380	380V, 0~22.5A	±1%	4V	92.5%

Enclosed-PFC 10KW~15KW Programmable High Power





■ Features

- 3ϕ 3-wire/ \triangle 230VAC or 3ϕ 4-wire/ Y 380VAC
- Built-in active PFC function
- High efficiency up to 92.5%
- Protections:

Short circuit / Overload / Over voltage / Over temperature / Fan alarm

- Forced air cooling by built-in DC fan
- Output voltage and constant current level Icc programmable

- Built-in current sharing up to 4 units
- Built-in remote sense and ON/OFF control
- Built-in 12V/0.1A auxiliary power
- Alarm signal output
- 5 years warranty



Model No.		RST-10000	RST-15K			
AC input volta	ge range	3ϕ 3-wire/ \triangle 196~305VAC or 3ϕ 4-wire/ Y 340~530VAC				
AC inrush curr	ent (max.)	Cold start, 150A at 230VAC (3 ϕ 3-wire/ \triangle) or 100A at 400VAC (3 ϕ 4-wire/ Y)	Cold start, 75A at 230VAC (3 ϕ 3-wire/ \triangle) or 50A at 230VAC (3 ϕ 4-wire/ Y)			
DC adjustment range		Vo: 24V-23.5~28.8V, 36V-35~43.2V, 48V-47~57.6V by VR, 20~120% by 1~6VDC Icc: 20~100% by 1~5VDC	Vo: 115V-90~138V, 230V-170~260V, 380V-334~400V by VR 1~120% by 1~6VDC Icc: 20~100% by 1~4.8VDC			
	Range	100%~112%	100~105%			
Overload protection Type		User adjustable continuous constant current limiting or constant current limiting with delay shutdown after 5 seconds. Re-power on to recover.	Constant current limiting ,unit will shutdown after 5 seconds. Re-power on to recover.			
Over voltage	Range	125%~140%	110%~144%			
protection	Type	Shut down O/P voltage, re-power on to recover				
Withstand volt	age	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 2kVAC			
Working tempe	rature	-30~+70°C (refer to output derating curve)				
Safety standar	ds	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved				
EMC standards	S	BS EN/EN55032 class A, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2, EN61204-3				
C	Input	6P/13mm pitch terminal block with cover				
Connection	Output	Bus bars				
Dimension (Lx)	WxH) (mm)	540x 424x 83.5				
	- 077 TI					

■ 10KW			RS	ST-10000	I	■ 15KW			Coming Soon	RST-15K
Model No.	Output	Tol.	R&N	Effi.		Model No.	Output	Tol.	R&N	Effi.
RST-10000-24	24V, 0~400A	±1%	150mV	89%		RST-15K-115	115V, 0~130.4A	±1%	1V	91%
RST-10000-36	36V, 0~276A	±1%	200mV	90%		RST-15K-230	230V, 0~69.4A	±1%	2V	92%
RST-10000-48	48V, 0~210A	±1%	200mV	91%		RST-15K-380	380V, 0~45A	±1%	4V	92.5%

Enclosed-PFC 10KW Programmable High Power





■ Features

- 3 \$\phi\$ 3-wire/380VAC
- Wide voltage adjustment range 50~120%
- Built-in active PFC function
- High efficiency up to 97%
- Water or forced air cooling
- Built-in CANBus/Optional PMBus protocol/MODBus-RTU/RS-485
- · Output voltage and constant current level programmable

- · Active current sharing up to 4 units
- Built-in remote ON-OFF control / Auxilary power/
- Alarm signal
- Protections: Short circuit / Overload / Over voltage /Over temperature / Fan fail
- 5 years warranty

■ General S	pecificat	ion (Please refer to www.meanwell.com for detail spec.)				
Model No.		SHP-10K				
AC input voltag	je range	3φ3-wire/340~530VAC				
AC inrush curre	ent (max.)	Cold start, 60A at 400VAC, 70A at 480VAC				
DC adjustment range		Vo: 55V-39~57.6V, 115V-90~138V, 230V-170~260V, 380V-260~400V by VR or 50~120% by external 1~4.8VDC Icc: 20~100% by external 1~4.8VDC				
Overload	Range	100%~105%				
protection	Туре	Continuous constant current limiting, unit will shutdown after 5 seconds. Re-power on to recover.				
Over voltage	Range	125%~145%				
protection	Туре	Shut down O/P voltage, re-power on to recover				
Withstand volta	ige	I/P-O/P: 3.75kVAC, I/P-FG: 2kVAC, O/P-FG: 1.25kVAC				
Working tempe	rature	-30~+70°C (refer to "Derating Curve")				
Safety standard	ds	UL62368-1, CAN/CSA C22.2 No.62368-1,TUV BS EN/EN62368-1,EAC TP TC 004 approved				
EMC standards		BS EN/EN55032,EN55011 Class A;BS EN/EN61000-3-2,3;BS EN/EN61000-4-2,3,4,5,6,8,11				
0	Input	4P/11mm pitch terminal block with cover				
Connection	Output	Bus bars/				
Dimension (LxWxH) (mm)		460x 211x 83.5				

1 0	■ 10KW							
	Model No.	Output	Tol.	R&N	Effi.			
	SHP-10K-55	55V, 0~150A	±1%	0.75V	95%			
	SHP-10K-115	115V, 0~87A	±1%	1.5V	96%			
	SHP-10K-230	230V, 0~46.2A	±1%	1.5V	96.5%			
	SHP-10K-380	380V, 0~30A	±1%	4.5V	97%			

Conduction Cooled PFC 200~500W Slim Type MEAN WELL





■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- · Slim width and low profile (26mm for UHP-200, 31mm for UHP-350/500)
- Built-in active PFC function
- 150% peak load capacility(100ms)
- Fanless and conduction-cooled design
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Optional DC OK active signal and redundant function for UHP-200/350/500 R
- LED indicator for power on
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		UHP-200	UHP-350	UHP-500				
AC input volta	age range	90~264VAC; 127~370VDC						
AC inrush cur	rent (max.)	Cold start, 40A at 115VAC, 80A at 230VAC	Cold start, 30A at 115VAC, 6	0A at 230VAC				
DC adjustmen	t range	±5% rated output voltage	J.					
Overload	Range	110%~140%						
protection	Туре	Hiccup mode, auto-recovery						
Over voltage	Range	110%~140%						
protection	Туре	Shut down O/P voltage, re-power on to recover						
Withstand vol	tage	I/P - O/P: 3.75kVAC, I/P - FG: 2kVAC, O/P - FG: 1.25kVAC						
Working temp	erature	-30~+70°C (refer to output derating curve) -30~+70°C (refer to output der						
Vibration		10~500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes						
Safety standa	rds	UL62368-1, TUV BS EN/EN62368-1, EN60335-1, GB4943, EAC TP TC 004, BSMI CNS14336-1 approved						
EMC standard	ls	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11; GB9254, EN61000-6-2(EN50082-2); BSMI CNS13438						
Dimension (Lx	(WxH)(mm)	194x 55x 26 220x 62x 31		233x 81x 31				

200W				UHP-200
Model No.	Output	Tol.	R&N	Effi.
UHP-200□-3.3	3.3V, 0~40A	±2%	150mV	89%
UHP-200□-4.2	4.2V, 0~40A	±2%	150mV	90%
UHP-200□-5	5V, 0~40A	±2%	200mV	91%
UHP-200□-12	12V, 0~16.7A	±1%	240mV	93%
UHP-200□-15	15V, 0~13.4A	±1%	240mV	94%
UHP-200□-24	24V, 0~8.4A	±1%	240mV	94%
UHP-200□-36	36V, 0~5.6A	±1%	240mV	94%
UHP-200□-48	48V, 0~4.2A	±1%	300mV	94%
UHP-200□-55	55V, 0~3.6A	±1%	360mV	94%
□=blank, R: blan	k: enclosed, R: DC	OK signal.	redundant f	unction

350W				UHP-350
Model No.	Output	Tol.	R&N	Effi.
UHP-350□-3.3	3.3V, 0~60A	±2%	150mV	88.5%
UHP-350□-4.2	4.2V, 0~60A	±2%	150mV	89%
UHP-350□-5	5V, 0~60A	±2%	200mV	90%
UHP-350□-12	12V, 0~29.2A	±1%	200mV	91%
UHP-350□-15	15V, 0~23.4A	±1%	200mV	92%

Note:48V and 55V types can be a PoE power source

Model No.	Output	Tol.	R&N	Effi.
UHP-350□-24	24V, 0~14.6A	±1%	240mV	94%
UHP-350□-36	36V, 0~9.75A	±1%	240mV	94%
UHP-350□-48	48V, 0~7.3A	±1%	240mV	94%
UHP-350□-55	55V, 0~6.3A	±1%	300mV	94%

□=blank, R; blank: enclosed, R: DC OK signal, redundant function

500W				UHP-500
Model No.	Output	Tol.	R&N	Effi.
UHP-500 □ -4.2	4.2V, 0~80A	±2%	200mV	89%
UHP-500□-5	5V, 0~80A	±2%	200mV	90%
UHP-500□-12	12V, 0~41.7A	±1%	200mV	94%
UHP-500□-15	15V, 0~33.4A	±1%	200mV	94%
UHP-500□-24	24V, 0~20.9A	±1%	240mV	94.5%
UHP-500□-36	36V, 0~13.9A	±1%	360mV	95%
UHP-500□-48	48V, 0~10.45A	±1%	360mV	95%
UHP-500□-55	55V, 0~8.9A	±1%	500mV	95%
□=blank, R; blank:	enclosed, R: DC C	K signal, r	edundant 1	function

Conduction Cooled PFC 750~1000W Slim Type MEAN WELL





■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Slim width and low profile(41mm)
- Built-in active PFC function
- Fanless and conduction-cooled design
- Protections: Short circuit / Overload /

Over voltage / Over temperature

- Output voltage and current programmable(UHP-1000)
- Built-in remote ON-OFF control(UHP-1000)
- DC ok active signal
- LED indicator for power on
- 3 years warranty (UHP-750) 5 years warranty (UHP-1000)

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		UHP-750	UHP-1000	
AC input volta	age range	90~264VAC; 127~370VDC		
AC inrush cur	rent (max.)	Cold start, 20A at 115VAC, 40A at 230VAC		
DC adjustmen	t range	0~20% rated output voltage		
Overload	Range	105%~125%		
protection	Туре	Hiccup mode, auto-recovery	Constant current limiting with delay shutdown after 3 seconds, re-power on to recover	
Over voltage	Range	120%~135%		
protection	Туре	Shut down O/P voltage, re-power on to recover		
Withstand vol	tage	I/P-O/P: 3.75kVAC, I/P-FG: 2kVAC, O/P-FG: 1.25kVAC, 1 minute		
Working temp	erature	-30~+70°C (refer to output derating curve)		
Vibration		10~500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes		
Safety standards		BS EN/EN62368-1, UL62368-1, EAC TP TC 004 approved; Design refer to BS EN/EN61558-1, EN60335-1 (by request)		
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11		
Dimension (Lx	(WxH)(mm)	237x 100x 41	240x 115x 41	

■ 750W				UHP-750
Model No.	Output	Tol.	R&N	Effi.
UHP-750-12	12V, 0~60A	±1%	150mV	93.5%
UHP-750-24	24V, 0~31.3A	±1%	200mV	95%
UHP-750-36	36V, 0~21A	±1%	250mV	95%
UHP-750-48	48V, 0~15.7A	±1%	250mV	95%

j	■ 1000W			U	HP-1000
	Model No.	Output	Tol.	R&N	Effi.
	UHP-1000-12	12V, 0~80A	±1%	150mV	94%
	UHP-1000-24	24V, 0~42A	±1%	240mV	95%
	UHP-1000-36	36V, 0~28A	±1%	240mV	95.5%
	UHP-1000-48	48V, 0~21A	±1%	300mV	96%

Note:48V output adjustable range 48~57V

Conduction Cooled PFC

1500~2500W Slim Type





■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Slim width and low profile (41mm for UHP-1500 / 60mm for UHP-2500)
- Built-in active PFC function
- Fanless and conduction-cooled design
- Protections: Short circuit / Overload /
 Over voltage / Over temperature
- Output voltage and current programmable
- Optional PMBus and CANBus protocol
- DC OK active signal
- LED indicator for power on
- 5 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		UHP-1500 UHP-1500-HV	UHP-2500			
AC input volta	ige range	90~264VAC; 127~370VDC				
AC inrush cur	rent (max.)	Cold start, 60A at 230VAC				
DC adjustmen	t range	0~20% rated output voltage				
Overload	Range	105%~125%				
protection	Туре	Constant current limiting with delay shutdown after 5 seconds, re-power on to recover				
Over voltage	Range	125%~140%				
protection	Type	Shut down O/P voltage, re-power on to recover				
Withstand vol	tage	I/P-O/P: 3.75kVAC, I/P-FG: 2kVAC, O/P-FG: 1.25kVAC, 1 minute				
Working temp	erature	-30~+70°C (refer to output derating curve)				
Vibration		10~500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes				
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,6-2,5,6,8,11				
Safety standards		BS EN/EN62368-1, UL62368-1, EAC TP TC 004 approved; design refer to EN61558-1, EN60335-1 (by request)				
Dimension (LxWxH)(mm)		290x 140x 41	310x 140x 60			

■ 1500W			U	HP-1500)
Model No.	Output	Tol.	R&N	Effi.	
UHP-1500-24	24V, 0~62.5A	±1%	240mV	95%	
UHP-1500-48	48V, 0~31.5A	±1%	350mV	96%	
UHP-1500-115	115V, 0~13A	±1%	1150mV	95%	
UHP-1500-230	230V, 0~7A	±1%	2300mV	96%	
UHP-1500-380	380V, 0~4.5A	±1%	3800mV	96%	
UHP-1500-380E	380V, 0~3.95A	±1%	3800mV	96%	

■2500W		UHP-2500		
Model No.	Output	Tol.	R&N	Effi.
UHP-2500-24	24V, 0~104.2A	±1%	300mV	95%
UHP-2500-36	36V, 0~69.4A	±1%	360mV	95.5%
UHP-2500-48	48V, 0~52.1A	±1%	480mV	96%

Note:1. 48V output adjustable range 48~57V

2. UHP-1500-380E without CANBus/PMBus protocal



Digitalized Enclosed Low Profile 3200~3500W High Power





■ DPU-3200 Features

- Universal AC input/ Full Range
- High efficiency up to 94.5%
- Forced air cooling by builting in DC fans
- Output voltage and constant current level programmable
- Active current sharing up to 16000W (5 units)
- Optional PMBus or CANBus protocol
- Protections: Short circuit / Over load / Over voltage / Over temperature
- Optional conformal coating
- 5 year warranty

■ PHP-3500 Features

- Universal AC input/ Full Range
- High efficiency up to 96%
- Fanless design, water-cooled power supply
- Slim and Low Profile (60mm)
- Output voltage and constant current level programmable
- OVC III operating altitude up to 2000 meters(PHP-3500-HV)
- Active current sharing up to 14000W, 4 units (24V &48V models)
- Built-in PMBus or optional CANbus protocol
- Protections: Short circuit / Over load / Over voltage / Over temp.
- Optional cold plate for effortless implementation
- Optional conformal coating
- 5 year warranty



Model No.		DPU-3200	PHP-3500		
			PHP-3500-HV		
AC input volta	ige range	90~264VAC; 127~370VDC			
AC inrush cur	rent (max.)	Cold start 55A/230VAC	Cold start 80A/230VAC		
DC adjustmen	t range	24V: 23.5~30V; 48V: 47.5~58.8V	24V: 24~28.8V; 48V: 48~57.6V 115V: 110~160V; 230V: 170~260V; 380V: 260~400V		
Overload	Range	105~115% rated output power			
protection	Type	Constant current limiting, shut down O/P voltage 5 sec. after O/P voltage is down low, re-power on to recover.			
		041/-04 5 07 51/-401/-00 751/-	24V: 30~36V; 48V: 60~72V		
Over voltage	Range	24V: 31.5~37.5V; 48V: 63~75V	115V: 168~200V; 230V: 273~320V; 380V: 413~460V		
protection	Туре	Shut down O/P voltage, re-power on to recover			
Withstand vol	tage	I/P-O/P: 3KVAC; I/P-FG: 2KVAC; O/P-FG: 1.5KVAC	I/P-O/P: 3KVAC; I/P-FG: 2KVAC; O/P-FG: 1.25KVAC		
Working temp	erature	-30~+70°C (refer to "De-rating curve")	-30~+70°C Baseplate Temperature (refer to "De-rating curve")		
Vibration		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X,Y, Z axes			
Safety standa	rds	UL62368-1,TUV BS EN/EN62368-1, EAC TP TC 004 approved	UL62368-1,TUV BS EN/EN62368-1, EAC TP TC 004 approved; Design refer to BS EN/EN61558-1, EN60335-1		
EMC standards		BS EN/EN55032/EN55011 Conduction Class B, Radiation Class A; EN61000-3-2,3; EN61000-4-2, 3, 4, 6, 8, 11; EN-61000-6-2, EAC TP TC 020			
Connection		Bus Bar	Terminal		
Dimension (Lx	(WxH)(mm)	325.8 x 107 x 41	380 x 141.4 x 60		

3200W			I	DPU-3200
Model No.	Output	Tol.	R&N	Effi.
DPU-3200-24	24V, 0~133A	±1%	300mV	93.5%
DPU-3200-48	48V, 0~67A	±1%	480mV	94.5%

3500W			Р	HP-3500
Model No.	Output	Tol.	R&N	Effi.
PHP-3500-24	24V, 0~145A	±1%	300mV	95%
PHP-3500-48	48V, 0~73A	±1%	480mV	96%
PHP-3500-115	115V, 0~25.2A	±1%	1150mV	95%
PHP-3500-230	230V, 0~15.2A	±1%	2300mV	95.5%
PHP-3500-380	380V, 0~9.2A	±1%	3800mV	96%




DC House



As increases in energy costs and demands to reduce fossil-based emissions are accelerating a worldwide call for clean energy and efficient power consumption, the DC House is far beyond a concept but necessary infrastructure. MEAN WELL is proud to introduce a new DC centralized bus for indoor device applications to reduce power loss issue.

With nearly four decades of experience in power supply design and manufacturing, MEAN WELL provides power solutions for DC centralized bus and DC lighting applications with complete enclosed type and DC to DC LED driver product portfolios. The DC centralized bus is easily integrated into a renewable energy system to reduce power consumption and total cost.

Please refer to the below diagram for a brand new "DC WORLD".

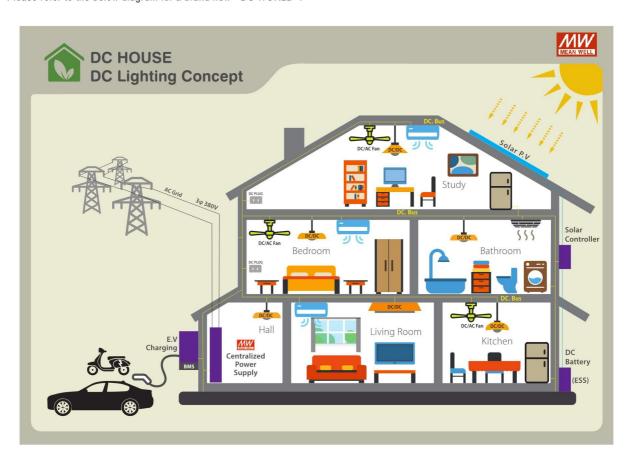

DC Centralized Bus for Lighting Application Selection Guide

Voltage type	Front-end (AC to DC Enclosed type)	Back-end (DC to DC LED driver)	Dimming function
Low Voltage bus (48V)	UHP-1500(1Ø3W) RST-5000/10000 (3Ø4W) SHP-10K(3Ø3W)Under Development	NLDD-H series LDDS-HWB series LDD-H-DA series	·PWM ·0-10V ·DALI
High Voltage bus (380V)	UHP-1500(1Ø3W) Releasing in 2021,Q4 RST-7K5/15K (3Ø4W)Under Development SHP-10K(3Ø3W) Under Development	NHDD series Releasing in 2021,Q4	·PWM ·Dim with DAP-04 for DALI system

Note: For detail LED Driver specification, please refer our LED power supply catalog.

DC House

380V DC BUS LED Driver






Features

- · Constant Current mode output
- For DC 380V BUS lighting luminaire
- Driver on Board (DoB) Solution available
- Plastic housing and Fully encapsolated
- · Built-in PWM and Remote ON/OFF control
- · Protections: short circuit/over temperature
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Output current accuracy		±5% at 380VDC input (Typical)	
		Leave open if not used	
PWM dimming & ON/OFF control	Remote ON/OFF	Power ON with dimming: DIM ~ -Vin >2.5~5VDC or open circuit Power OFF:	
		DIM ~ -Vin <0.8VDC or short	
	PWM frequency	100~1KHz	
Short circuit		Hiccup mode, recovers automatically after fault condition is removed	
Over temperature	protection	Tcase>85 C ±5 C ,derate power automatically	
Working temperat	ure	-30 ~ +85 °C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)	
EMC standards		BS EN55015, BS EN61547, BS EN61000-4-2,3,4,6,8	
Operating case temp. (max.)		<85°C	
Dimension (LxWx	H)(mm)	32.1x 20.5x 12.5mm	

Model No. Input Output Voltage Output Current Io Tol. Efficiency NHDD-40-100□ 360~400V 355V (typical) 100mA ±15% 95% □ = Blank, W; Blank: Pin style, W: Wire style

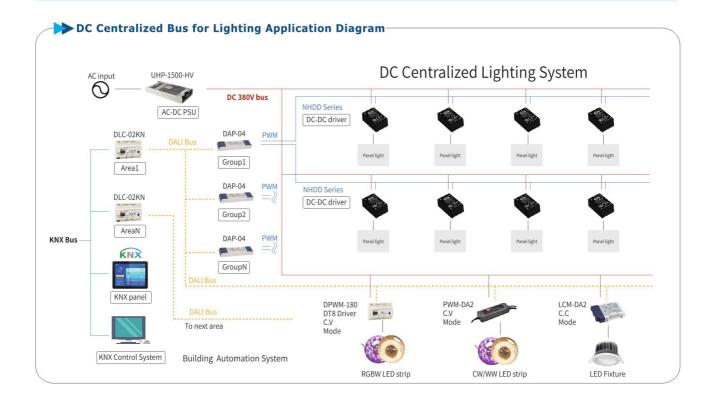

Enclosed-PFC 150~300W Programmable Power Lite





■ Features

- Universal AC input / Full range
- Built-in active PFC function
- Protections:

Short circuit / Overload / Over voltage / Over temperature


- Output voltage programmable
- Forced air cooling by built-in DC fan (except for SPV-150)
- 3 years warranty



Model No.		SPV-150	SPV-300			
AC input voltage range		88~264VAC; 124~370VDC				
AC inrush curi	ent (max.)	Cold start, 45A at 230VAC				
DC adjustment range		Vo: -15%~+10% by VR or to 20%~110% of rated output voltage by 1~5.5VDC external control signal				
Overload	Range	105%~150%	105%~135%			
protection	Туре	constant current limiting, auto-recovery				
Over voltage	Range	115%~140%				
protection	Туре	shut down O/P voltage, re-power on to recover				
Withstand volt	age	I/P - O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC				
Working tempe	erature	-20~+65°C (refer to "De-rating curve")				
Safety standards		UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved				
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020				
Dimension (Lx	WxH) (mm)	215x 115x 50				
		1				

■ 150W				SPV-150
Model No.	Output	Tol.	R&N	Effi.
SPV-150-12	12V, 0~12.5A	±1%	150mV	82%
SPV-150-24	24V, 0~6.25A	±1%	150mV	83%
SPV-150-48	48V, 0~3.125A	±1%	240mV	83%

300W				SPV-300
Model No.	Output	Tol.	R&N	Effi.
SPV-300-12	12V, 0~25A	±1%	150mV	83.5%
SPV-300-24	24V, 0~12.5A	±1%	150mV	85.0%
SPV-300-48	48V, 0~6.25A	±1%	240mV	86.5%

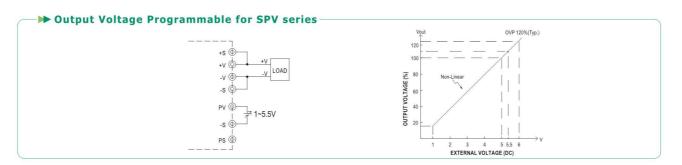

Enclosed-Redundancy Module 20A&40A MEAN WELL






■ Features


- Output current 20A & 40A
- Support 1+1 and N+1 redundancy system
- Suitable for redundancy operation of 5V/12V/24V/48V system
- 2 channels input and 1 output
- -40~+80°C ultra wide operating temperature
- 2 dry relay contact for monitoring output status, and LED indicator for input failure alarm
- 3 years warranty

DRDN20/40 series, DIN rail type modules are available on P.40



Model N	Model No.			ERI	N20 24			ERDN40 24	
WoderN			5	12	24	48	12	24	48
	DC input	voltage range	4.5~6Vdc	9~14Vdc	19~29Vdc	36~60Vdc	9~14Vdc	19~29Vdc	36~60Vdc
Input	Rated current		0~20A per i	nput continous			0~40A per inpu	t continous	
	Peak cur	rent	0~30A per i	nput 5 sec			0~60A per inpu	t 5 sec	
	Voltage d	Irop (Vin-Vout)	0.2~0.5Vdc	max.					
	Reverse	voltage (max.)	15Vdc	40Vdc	40Vdc	65Vdc	40Vdc	40Vdc	65Vdc
	Rated current		20A				40A	·	
Output	Peak current		30A, 5 sec. 60A, 5 sec.						
	Standby power losses		1.5W Typ.						
	Relay contact		2 dry relay contact, 30Vdc resistive load for each chanel						
	Input voltage	Voltage range	<4 or >6.5V	<8.5V or >14.7V	<18V or >31V	<34.2V or >63V	<8.5V or >14.7V	<18V or >31V	<34.2V or >63V
	alarm	LED display	Green: OK,	dark: input voltage	failure				
	Working temperature		-40~+80°C (refer to output derating curve)						
General	Protectio	ns	Overload or short circuit, <30A for 5 sec. no damage						
General	Cooling		Free air convection						
	Safety standards		UL62368-1, EAC TP TC 004 approved						
	EMC stan	ndards	BS EN/EN55032 class B, EN61000-4,2,3,4,5,6,8						
	Connecti	on	Screw terminal: I/P: 4 poles(V _{in1} andV _{in2} +,-), O/P: 2 poles (V ₀₊ /V ₀₋); wafer connector: 4 pin(Alarm ₁ and Alarm ₂ dry relay contact)						
	Dimensio	n (LxWxH)(mm)	82x 99x 36				97x 99x 36		







Enclosed-PFC 100~300W High Reliability Medical Grade





■ Features

- Universal AC input / Full range
- Medical safety approved (2xMOOP)
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- 1U low profile
- Built-in constant current limiting circuit
- Built-in remote sense function (MSP-200/300)
- No load power consumption <0.5W
- Built-in remote ON/OFF control
- Built-in 5V/0.3A standby output (MSP-200/300)
- Built-in DC OK signal (MSP-300)
- LED indicator for power on
- 5 years warranty



	•					
Model No.		MSP-100	MSP-200	MSP-300		
AC input voltage range		85~264VAC; 120~370VDC				
Leakage cu	rrent	<300µA		<450µA		
AC inrush current (max.)		Cold start, 65A at 230VAC	Cold start, 70A at 230VAC			
DC adjustm	ent range	±15% rated output voltage				
Overload	Range	105%~135%				
protection	Туре	Constant current limiting, auto-recovery				
Over voltag	je protection	115%~145%				
Withstand	voltage	I/P-O/P: 4kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC, 1 minute				
Working te	mperature	-40~+60°C	-40~+70°C (refer to output derating curve)			
Safety stan	dards	ANSI/AAMI ES60601-1, BS EN60601-1, EAC TP TC 004 approved				
EMC standa	ards	BS EN/EN55011 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN60601-1-2; EAC TP TC 020				
Connection		7P / 9.5mm pitch terminal block with cov	P / 9.5mm pitch terminal block with cover			
Dimension	(LxWxH)(mm)	159x 97x 38	199x 98x 38	199x 105x 41		

■ 100W			N	ISP-100
Model No.	Output	Tol.	R&N	Effi.
MSP-100-3.3	3.3V, 0~20A	+2.5%, -3.5%	80mV	78.0%
MSP-100-5	5V, 0~17A	+2.5%, -3.5%	80mV	83.0%
MSP-100-7.5	7.5V, 0~13.5A	±2.5%	100mV	84.0%
MSP-100-12	12V, 0~8.5A	±1.5%	120mV	87.5%
MSP-100-15	15V, 0~7A	±1.5%	150mV	88.0%
MSP-100-24	24V, 0~4.5A	±1.5%	150mV	88.5%
MSP-100-36	36V, 0~2.9A	±1.5%	200mV	89.0%
MSP-100-48	48V, 0~2.2A	±1.5%	240mV	90.0%

200W			M	SP-200
Model No.	Output	Tol.	R&N	Effi.
MSP-200-3.3	3.3V, 0~40A	±2%	80mV	80.0%
MSP-200-5	5V, 0~35A	±2%	90mV	84.0%
MSP-200-7.5	7.5V, 0~26.7A	±2%	100mV	86.0%

Model No.	Output	Tol.	R&N	Effi.	
MSP-200-12	12V, 0~16.7A	±1%	120mV	88.0%	
MSP-200-15	15V, 0~13.4A	±1%	150mV	88.0%	
MSP-200-24	24V, 0~8.4A	±1%	150mV	88.0%	
MSP-200-36	36V, 0~5.7A	±1%	250mV	89.0%	
MSP-200-48	48V, 0~4.3A	±1%	250mV	89.0%	

300W			IV	ISP-300
Model No.	Output	Tol.	R&N	Effi.
MSP-300-3.3	3.3V, 0~60A	±2.5%	80mV	80.0%
MSP-300-5	5V, 0~60A	±2%	90mV	82.0%
MSP-300-7.5	7.5V, 0~40A	±2%	100mV	86.0%
MSP-300-12	12V, 0~27A	±1%	120mV	88.0%
MSP-300-15	15V, 0~22A	±1%	150mV	88.0%
MSP-300-24	24V, 0~14A	±1%	150mV	87.0%
MSP-300-36	36V, 0~9A	±1%	250mV	88.0%
MSP-300-48	48V, 0~7A	±1%	250mV	89.0%



Enclosed-PFC 450~1000W High Reliability Medical Grade MEAN WELL





■ Features

- Universal AC input / Full range
- Medical safety approved (2xMOOP) for MSP-450/600 Medical safety approved (2xMOPP) for MSP-1000
- Withstand 300VAC surge input for 5 seconds
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- · Built-in constant current limiting circuit
- Built-in remote sense function
- No load power consumption <0.6W for MSP-450; <0.8W for MSP-600/1000; <0.75W for MSP-1000
- Built-in current sharing (MSP-600-24/36/48; MSP-1000)
- Built-in remote ON/OFF control
- Built-in 5V/0.3A standby output
- Built-in DC OK signal
- LED indicator for power on
- 5 years warranty



Model No.		MSP-450	MSP-600	MSP-1000	
AC input voltage range		85~264VAC; 120~370VDC		90~264VAC; 127~370VDC	
Leakage current		<300µA			
AC inrush o	urrent (max.)	Cold start, 70A at 230VAC	Cold start, 80A at 230VAC	Cold start, 40A at 230VAC	
DC adjustment range		±15% rated output voltage		-8%~+17% rated output voltage	
Overload Range		105%~135%			
protection	Type	Constant current limiting, auto-recovery			
Over voltag	e protection	115%~145%		120%~137%	
Withstand v	voltage	I/P-O/P: 4kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC, 1 minute		I/P-O/P: 4.5kVAC, I/P-FG: 2kVAC, O/P-FG: 1.5kVAC, 1 minute	
Working ter	nperature	-40~+70°C (refer to output derating curve)			
Safety stan	dards	ANSI/AAMI ES60601-1, BS EN60601-1, EAC TP TC 004 approved			
EMC standards		BS EN/EN55011 class B for MSP-450/600, EN55032 class A for MSP-1000, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EN60601-1-2			
Connection		3+6P / 10 &11mm pitch terminal block with cover			
Dimension	(LxWxH)(mm)	218x 105x 41	218x 105x 63.5		

■ 450W				MSP-450
Model No.	Output	Tol.	R&N	Effi.
MSP-450-3.3	3.3V, 0~90A	±2%	80mV	80.0%
MSP-450-5	5V, 0~90A	±2%	80mV	83.0%
MSP-450-7.5	7.5V, 0~60A	±2%	100mV	86.5%
MSP-450-12	12V, 0~37.5A	±1%	120mV	88.0%
MSP-450-15	15V, 0~30A	±1%	150mV	89.0%
MSP-450-24	24V, 0~18.8A	±1%	150mV	88.0%
MSP-450-36	36V, 0~12.5A	±1%	240mV	89.0%
MSP-450-48	48V, 0~9.5A	±1%	240mV	89.5%

■ 600W			N	ISP-600
Model No.	Output	Tol.	R&N	Effi.
MSP-600-3.3	3.3V, 0~120A	±2%	120mV	78.5%
MSP-600-5	5V, 0~120A	±2%	150mV	82.0%
MSP-600-7.5	7.5V, 0~80A	±2%	150mV	86.0%

Model No.	Output	Tol.	R&N	Effi.
MSP-600-12	12V, 0~53A	±1%	150mV	88.0%
MSP-600-15	15V, 0~43A	±1%	150mV	88.0%
MSP-600-24	24V, 0~27A	±1%	150mV	88.0%
MSP-600-36	36V, 0~17.5A	±1%	200mV	89.0%
MSP-600-48	48V, 0~13A	±1%	240mV	89.0%

■ 1000W			M	SP-1000
Model No.	Output	Tol.	R&N	Effi.
MSP-1000-12	12V, 0~80A	±2%	150mV	91.5%
MSP-1000-15	15V, 0~64A	±1.5%	150mV	92.0%
MSP-1000-24	24V, 0~42A	±1%	200mV	93.0%
MSP-1000-48	48V, 0~21A	±1%	250mV	94.0%



DIN Series

10~96W Ultra Slim





■ Features

- Universal AC input / Full range
- Installed on DIN rail TS-35 / 7.5 or 15
- Protections: Short circuit / Overload / Over voltage
- No load power consumption <0.75W (<1W for MDR-100)
- LED indicator for power on
- Built-in active PFC and over temp. protection (MDR-100)
- Class I, Div 2 Hazardous Locations T4(MDR-40/60)
- DC OK signal output (MDR-10/20); DC OK relay contact (MDR-40/60/100)
- Cooling by free air convection
- DC output voltage adjustable (MDR-20~100)
- 3 years warranty

Model No.		MDR-10	M	IDR-20		MDR-40	MDR-6	0	MDR-100	
AC input voltage	range	85~264VAC; 120~370	OVDC							
A0 !		Cold start, 35A at 115	VAC, C	old start, 20A	at 115VAC,	Cold start,	30A at 115VA	C,		
AC inrush curren	it	70A at 230VAC	4	0A at 230VAC		60A at 230	VAC			
DC adjustment ra	nge	Fixed	±	10% rated out	put voltage	0~+20% ra	ted output vo	Itage		
Overload protect	ion	>105% hiccup mode, auto-recovery		05%~160% comiting, auto-re		rent 105%~150% constant current limiting, auto-recover			covery	
Over voltage pro	tection	115%~135% rated ou	tput volt	tage		125%~150	% rated outpu	t voltage		
Setup, rise, hold	up time	500ms, 30ms, 120ms	5	00ms, 30ms, 5	0ms				3000ms, 50m	ıs, 50ms
Withstand voltag	е	I/P-O/P:3kVAC, I/P-F	G:2kVA	C, 1minute						
Working tempera	ture	-20~+70°C (refer to	output d	erating curve)				-10~+60°C		
DC OK signal		Open collector				Relay cont	act			
Safety standards					C 004, BSMI CNS14336-1, AS/NZS 60950.1 approved; MDR-40/60 also 1-2013 Class I, Div. 2 Group A, B, C, D Hazardous Locations T4					
EMC standards		BS EN/EN55032 class EN61000-6-2 heavy in	ASSESSED FOR THE PARTY OF THE P		a threatening or threat the part and	STATE OF THE STATE	1204-3,			
Connection		I/P: 3 poles, O/P: 3 p	oles scr	rew DIN termin	al	IP: 3 poles	, O/P: 6 poles	s screw D	OIN terminal	
Dimension (WxH)	(D)(mm)	22.5x90x100				40x90x100			55x90x100	
10W		Ø ♣ c UL us ≜	Mant pools 40 mile Mantener Mantener Mantener Mantener Mantener	CBUKCE	Model N	D.	Output	Tol.	R&N	Effi.
	04				MDR-40-		V. 0~1.70A	±1%	150mV	88%
Model No. MDR-10-5	Out 5V, 0~		R&N 80mV	Effi. 77%	MDR-40-		V, 0~0.83A	±1%	200mV	88%
MDR-10-12	12V, 0~	~0.84A ±3%	120mV	81%			c: A O =		rnr () = -	
MDR-10-15	15V 0~	-0.67A +3%	120mV	81%	60W		∅ 🙈 😭 🖫	IIC C (UL)	·H	BUK

1000			DCACE	
Model No.	Output	Tol.	R&N	Effi.
MDR-10-5	5V, 0~2.0A	±5%	80mV	77%
MDR-10-12	12V, 0~0.84A	±3%	120mV	81%
MDR-10-15	15V, 0~0.67A	±3%	120mV	81%
MDR-10-24	24V, 0~0.42A	±2%	150mV	84%
	C	• •	101	- IIV
20W	Ø	7⊖ c@r) na [BEACE
Model No.	Output	Tol.	R&N	Effi.
MDR-20-5	5V, 0~3.0A	±2%	80mV	76%
MDR-20-12	12V, 0~1.67A	±1%	120mV	80%
MDR-20-15	15V, 0~1.34A	±1%	120mV	81%
MDR-20-24	24V, 0~1.00A	±1%	150mV	84%
40W	∅&⊖ .¶	US c (VL) us	EHL C	BCV(E
Model No.	Output	Tol.	R&N	Effi.
MDR-40-5	5V, 0~6.00A	±2%	80mV	78%
MDR-40-12	12V, 0~3.33A	±1%	120mV	86%

MDR-40-24	24V, 0~1.70A	±1%	150mV	88%
MDR-40-48	48V, 0~0.83A	±1%	200mV	88%
■ 60W	R :⊖&®	Z°US c UL us [BEKCE
Model No.	Output	Tol.	R&N	Effi.
MDR-60-5	5V, 0~10.0A	±2%	80mV	78%
MDR-60-12	12V, 0~5.00A	±1%	120mV	86%
MDR-60-24	24V, 0~2.50A	±1%	150mV	88%
MDR-60-48	48V, 0~1.25A	±1%	200mV	87%
		_		
■ 100W	Ø		UL us [FI[]	EKC€
Model No.	Output	Tol.	R&N	Effi.
MDR-100-12	12V, 0~7.5A	±1%	120mV	83%
MDR-100-24	24V, 0~4.0A	±1%	150mV	86%
MDR-100-48	48V, 0~2.0A	±1%	200mV	87%

DIN Series

15~60W Slim Step Shape





■ Features

- · Isolation Class II
- Universal AC input / Full range (277VAC operational)
- No load power consumption<0.3W
- · Compact size with 1SU~4SU width
- Class 2 power unit / Pass LPS
- · Over voltage category III
- · Protections: Short circuit / Overload / Over voltage
- Can be installed on DIN rail TS-35 / 7.5 or 15
- · Cooling by free air convection
- DC output voltage adjustable
- LED indicator for power on
- Suitable for building automation and control of household appliance
- · 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No. AC input voltage range		HDR-15	HDR-30	HDR-60		
		85~264VAC (277VAC operational); 120	85~264VAC (277VAC operational); 120~370VDC (390VDC operational)			
AC inrush curr	rent (max.)	Cold start, 45A at 230VAC		Cold start, 60A at 230VAC		
DC adjustment	range	5V: 4.5~5.5V, 12V: 10.8~13.8V, 15V: 1	3.5~18V, 24V: 21.6~29V, 48V	: 43.2~55.2V		
Overload	Range	110%~145%	105%~160%			
protection	Type	Hiccup mode when output voltage <50%, constant current limiting within 50~100% rated output voltage, auto-recovery				
Over voltage	Range	115%~150% rated output voltage				
protection	Type	Shut off, clamp by zener diode	Shut down, re-power on to recover			
Withstand volt	age	I/P-O/P: 4kVAC				
Working tempe	erature	-30~+70°C (refer to output load derating curve)				
Vibration		10~500Hz, 2G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes				
Safety standar	ds	UL62368-1, UL508, TUV BS EN/EN61558-2-16, BS EN62368-1, EAC TP TC 004, BSMI CNS14336-1 approved				
EMC standards	3	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-6-2, EN61000-4-2,3,4,5,6,8,11, EN61204-3				
Connection		I/P and O/P:2 poles screw DIN termina	al	I/P: 2 poles, O/P: 4 poles screw DIN termina		
Dimension (WxHxD)(mm)		17.5x 90x 54.5	35x 90x 54.5	52.5x 90x 54.5		

COM

15W				HDR-15
Model No.	Output	Tol.	R&N	Effi.
HDR-15-5	5V, 0~2.40A	±2%	80mV	80%
HDR-15-12	12V, 0~1.25A	±1%	120mV	85%
HDR-15-15	15V, 0~1.00A	±1%	120mV	85.5%
HDR-15-24	24V, 0~0.63A	±1%	150mV	86%
HDR-15-48	48V, 0~0.32A	±1%	240mV	87%

■ 6UW				HDK-60
Model No.	Output	Tol.	R&N	Effi.
HDR-60-5	5V, 0~6.5A	±2%	80mV	85%
HDR-60-12	12V, 0~4.5A	±1%	120mV	88%
HDR-60-15	15V, 0~4.0A	±1%	120mV	89%
HDR-60-24	24V, 0~2.5A	±1%	150mV	90%
HDR-60-48	48V, 0~1.25A	±1%	240mV	91%

■ 30W				HDR-30
Model No.	Output	Tol.	R&N	Effi.
HDR-30-5	5V, 0~3.0A	±2%	80mV	82%
HDR-30-12	12V, 0~2.0A	±1%	120mV	88%
HDR-30-15	15V, 0~2.0A	±1%	120mV	89%
HDR-30-24	24V, 0~1.5A	±1%	150mV	89%
HDR-30-48	48V, 0~0.75A	±1%	240mV	90%

Difference	Casing	Protection	Over Voltage	Working
Series	Type	Classes	Category	Temp.
HDR	Step Shape	Class II	OVC III	-30~+70°C

Class I

Ultra Slim

HDR vs. MDR

32

MDR

HDD CO

-20~+70°C

DIN Series

92~150W Ultra-slim Step Shape





■ Features

- · Isolation Class II
- Universal AC input / Full range (277VAC operational)
- No load power consumption<0.3W
- Compact size with 4SU~6SU width
- Class 2 power unit / Pass LPS (HDR-100 only)
- · Over voltage category III
- · Protections: Short circuit / Overload / Over voltage
- Can be installed on DIN rail TS-35 / 7.5 or 15
- · Cooling by free air convection
- DC output voltage adjustable
- · LED indicator for power on
- Suitable for building automation and control of household appliance
- 3 years warranty

■ General Specification



			(112111100011))			
Model No.		HDR-100 □	HDR-150			
AC input voltage range		85~264VAC (277VAC operational); 120~370VDC (390VDC operational)				
AC inrush current (max.)		Cold start, 70A at 230VAC				
DC adjustment range		HDR-100 12V: 12~13V, 15V: 15~17V, 24V: 24~25.5V, 48V: 48~48.7V HDR-100-N 12V: 12~13.8V, 15V: 13.8~18V, 24V: 21.6~29V, 48V: 43.2~55.2V	12V: 10.8~13.8V 15V: 13.8~18V 24V: 21.6~29V 48V: 43.2~55.2V			
Overload	Range	HDR-100: 102%~110%; HDR-100-xxN: 105%~150%	105%~135%			
protection	Туре	Hiccup mode when output voltage <50%, constant current limiting within 50~100% rated output voltage, auto-recov				
Over voltage	Range	125%~155% rated output voltage				
protection	Туре	Shut down, re-power on to recover				
Withstand voltage		I/P-O/P: 3kVAC				
Working temperature		-30~+70°C (refer to output load derating curve)				
Vibration		10~500Hz, 2G 10 min./1 cycle, period for 60 min. each along X, Y, Z axes				
Safety standards		UL62368-1, UL508, TUV BS EN/EN61558-2-16, IEC62368-1, BSMI CNS14336, AS/NZS60950.1, TPTC004 approved	UL62368-1, UL61010, TUV BS EN/EN61558-2 IEC62368-1, TPTC004 approved			
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-6-2, EN61000-4-2,3,4,5,6,8,11, CNS13438, EN61204-3				
Connection		I/P: 2 poles, O/P: 4 poles screw DIN terminal				
Dimension (WxHxD)(mm)		70x 90x 54.5	105x 90x 54.5			
	7.00	1				

1 00W			HDR-100			
Model No.	Output	Tol.	R&N	Effi.		
HDR-100-12	12V, 0~7.1A	±2%	120mV	88%		
HDR-100-12N	12V, 0~7.5A	±2%	120mV	88%		
HDR-100-15	15V, 0~6.13A	±1%	120mV	89%		
HDR-100-15N	15V, 0~6.5A	±1%	120mV	89%		
HDR-100-24	24V, 0~3.83A	±1%	150mV	90%		
HDR-100-24N	24V, 0~4.2A	±1%	150mV	90%		
HDR-100-48	48V, 0~1.92A	±1%	240mV	90%		
HDR-100-48N	48V, 0~2.1A	±1%	240mV	90%		
HDR-100: 92W max., pass LPS						

HDR-100: 92W max., pass LPS HDR-100-xxN: 100W max., non-LPS with a wide output adjustable range

■ 150W	н			DR-150
Model No.	Output	Tol.	R&N	Effi.
HDR-150-12	12V, 0~11.3A	±2%	100mV	89%
HDR-150-15	15V, 0~9.5A	±1%	120mV	89.5%
HDR-150-24	24V, 0~6.25A	±1%	150mV	90.5%
HDR-150-48	48V, 0~3.2A	±1%	200mV	90.5%

DIN Series 75~960W Slim and High Performance





■ Features

- High efficiency up to 94%
- Universal AC input / Full range (SDR-75/120/240/480); AC input 180~264VAC only (SDR-960)
- Complete functions:
- ◆130~150% peak load capability by series
- ◆Current sharing up to 3840W

(7+1 for SDR-480P, 3+1 for SDR-960)

- ◆Built-in DC OK relay contact (except for SDR-75)
- ◆Comply with SEMIF47 (SDR-75~960)
- Protections: Short circuit / Overload /

Over voltage / Over temperature

- Cooling by free air convection
- DC output voltage adjustable
- Installed on DIN rail TS-35 / 7.5 or 15
- UL508(industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- 3 years warranty

Model No.		SDR-75	SDR-120	SDR-240	SDR-480	SDR-960		
AC input vol	tage range	88~264VAC: 124~370VDC			90~264VAC; 127~370VDC	180~264VAC; 254~370VDC		
AC inrush cu	urrent (max.)	Cold start, 50A at 230VAC	Cold start, 70A at 230VAC	Cold start, 55A at 230VAC	Cold start, 80A at 230VAC	Cold start, 50A at 230VAC		
DC adjustme	nt range	12V: 12~14V (only	for SDR-75/120)	, 24V: 24~28V, 48V: 48	3~55V			
Overload protection		Normally works wit shut down output v		Normally works within 105%~130% rated output power for 3 seconds and then shut down o/p voltage with auto-recovery after 30 seconds if the peak load condition is removed				
overload pro	rection	>150% rated power or short circuit, constant current limiting with auto-recovery within 2 seconds and may cause to shut down if over 2 seconds				Constant current limiting within 130%~150% rated output power for more than 3 seconds and then shut down o/p voltage, re-power on to recover		
	Range	14~17V for 12V model(SDR-75/120), 29~33V for 24V model, 56~65V for 48V model						
Over voltage protection	Туре	Shut down o/p voltage, re-power on to recover			e with auto-recovery, or	re-power on to recover		
Over temperat	ure protection	Re-power on to recover	Recovers automatically after temperature does down					
Withstand vo	oltage	I/P-O/P:3kVAC, I/I	I/P-O/P:3kVAC, I/P-FG:1.5kVAC, O/P-FG:0.5kVAC, O/P-DC OK:0.5kVAC (except for SDR-75)					
Working tem	perature	-30~+70°C	-25~+70°C (refe	er to output derating cu	rve)	-30~+70°C		
Safety standards EMC standards		UL508, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1(SDR-120/240/480/960) approved						
			BS EN/EN55011(SDR-120/240/480), EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020, EN61000-6-2 (EN50082-2), EN61204-3; SEMI (SDR-75/120/240/480)					
Connection (screw DIN to	erminal)	I/P: 3 poles, O/P:				I/P:3 poles, O/P: 6 poles		
Dimension (WxHxD)(mm)	32x125.2x102	40x125.2x113.5	63x125.2x113.5	85.5x125.2x128.5	110x125.2x150		

■ 75W		c (UL) us 🕸		B K C E	
Model No.	Output	Tol.	R&N	Effi.	
SDR-75-12	12V, 0~6.3A	±1.0%	100mV	88.5%	
SDR-75-24	24V, 0~3.2A	±1.0%	100mV	89.0%	
SDR-75-48	48V, 0~1.6A	±1.0%	120mV	90.0%	

■ 120W	R	c(U) us 🔅 😝	Name of the last o	B\K(€	
Model No.	Output	Tol.	R&N	Effi.	
SDR-120-12	12V, 0~10A	±1.0%	100mV	89.0%	
SDR-120-24	24V, 0~ 5A	±1.0%	100mV	91.0%	
SDR-120-48	48V, 0~2.5A	±1.0%	120mV	90.5%	

240W		D (U us 💸 🖯		BKCE
Model No.	Output	Tol.	R&N	Effi.
SDR-240-24	24V, 0~10A	±1.0%	50mV	94%
SDR-240-48	48V, 0~5A	±1.0%	50mV	94%
■ 480W	Parallel (Fr	?	A STATE OF THE PARTY OF THE PAR	BKC€
Model No.	Output	Tol.	R&N	Effi.
SDR-480 🗌 -24	24V, 0~20A	±1.2%	100mV	94%
SDR-480 -48	48V, 0~10A	±1.0%	120mV	94%
=blank, P; Bla	ank: basic functio	on, P: with p	arallel functio	n
960W	Paralle			BKC€
Model No.	Output	Tol.	R&N	Effi.
SDR-960-24	24V, 0~40A	±1.0%	180mV	94%
SDR-960-48	48V, 0~20A	±1.0%	250mV	94%



75~480W Slim and Economical





■ Features

- Universal AC input / Full range
- Built-in active PFC function(NDR-240/480)
- \bullet High efficiency up to 92.5%
- Protections: Short circuit / Overload /
 Over voltage / Over temperature
- Cooling by free air convection
- DC output voltage adjustable
- Can be installed on DIN rail TS-35 / 7.5 or 15
- UL508 (industrial control equipment) listed
- EN61000-6-2 (EN50082-2) industrial immunity level
- 3 years warranty



— Contoral opcomodition (Field		or refer to www.incumveincein for detail open,		(NDR-240/480 Only)	(NDR-240/480 only)	
Model No.		NDR-75	NDR-120	NDR-240	NDR-480	
AC input volta	ge range	90~264VAC; 127~370VDC				
AC inrush cur	rent (max.)	Cold start, 35A at 230VAC				
DC adjustmen	t range	12V: 12~14V, 24V: 24~28V	, 48V: 48~55V			
Overload	Range	105%~130%				
protection	Туре	Constant current limiting,	auto-recovery		Constant current limiting, shut off after 3 sec., re-power on to recover	
Over voltage	Range	12V: 14~17V, 24V: 29~33V, 48V: 56~65V				
protection	Type	Shut down o/p voltage, re-power on to recover				
Over temperat	ure protection	Shut down o/p voltage, re-	power on to recover	Shut down o/p voltage, auto-recovery		
Withstand vol	tage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC				
Working temp	erature	-20~+70°C (refer to output derating curve)				
Safety standa	rds	UL508, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1(NDR-240/480) approved				
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2(EN50082-2), EN61204-3; EAC TP TC 020				
Connection (s	crew DIN terminal)	I/P: 3 poles, O/P: 4 poles				
Dimension (W	xHxD)(mm)	32x 125.2x 102	40x 125.2x 113.5	63x 125.2x 113.5	85.5x 125.2x 128.5	

■ 75W	NDR-75			
Model No.	Output	Tol.	R&N	Effi.
NDR-75-12	12V, 0~6.3A	±2.0%	80mV	85.5%
NDR-75-24	24V, 0~3.2A	±1.0%	150mV	88.0%
NDR-75-48	48V, 0~1.6A	±1.0%	240mV	89.0%

■ 120W			N	IDR-120
Model No.	Output	Tol.	R&N	Effi.
NDR-120-12	12V, 0~10A	±2.0%	100mV	85.5%
NDR-120-24	24V, 0~5A	±1.0%	120mV	88.0%
NDR-120-48	48V, 0~2.5A	±1.0%	150mV	89.0%

240W NDR-240							
Model No.	Output	Tol.	R&N	Effi.			
NDR-240-24	24V, 0~10A	±1.0%	150mV	88.5%			
NDR-240-48	48V, 0~5A	±1.0%	150mV	90.0%			

■ 480W NDR-480						
Model No.	Output	Tol.	R&N	Effi.		
NDR-480-24	24V, 0~20A	±1.0%	150mV	92.5%		
NDR-480-48	48V, 0~10A	±1.0%	150mV	92.5%		

75~150W Slim and Economical





■ Features

- Universal AC input / Full range
- Protections: Short circuit / Overload /
 Over voltage / Over temperature
- Cooling by free air convection
- DC output voltage adjustable
- Can be installed on DIN rail TS-35 / 7.5 or 15
- UL508 (industrial control equipment) listed
- EN61000-6-2 (EN50082-2) industrial immunity level
- Low cost
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		EDR-75	EDR-120	EDR-150		
AC input volta	ge range	90~264VAC; 127~370VDC				
AC inrush cur	rent (max.)	Cold start, 35A at 230VAC				
DC adjustmen	range	12V: 12~14V, 24V: 24~28V, 48V: 48~	55V			
Overload	Range	105%~130%				
protection	Type	Constant current limiting, auto-recove				
Over voltage	Range	12V: 14~17V, 24V: 29~33V, 48V: 56~	24V: 29~33V			
protection	Туре	Shut down o/p voltage, re-power on to recover				
Over temperat	ure protection	Shut down o/p voltage, re-power on to recover				
Withstand vol	age	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC				
Working temp	erature	-20~+60°C (refer to output derating curve)				
Safety standards		UL508, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1 approved				
EMC standards		BS EN/EN55032 classA, EN61000-3-2(125W for EDR-150),3, BS EN/EN61000-4-2,3,4,5,6,8,11, EN61000-6-2(EN50082-2); EAC TP TC 020, CNS13438				
Connection (screw DIN terminal)		I/P: 3 poles, O/P: 4 poles				
Dimension (WxHxD)(mm)		32x 125.2x 102	40x 125.2x 113.5			
		L	The state of the s			

■ 75W						
Model No.	Output	Tol.	R&N	Effi.		
EDR-75-12	12V, 0~6.3A	±2.0%	80mV	85.5%		
EDR-75-24	24V, 0~3.2A	±1.0%	120mV	87.5%		
EDR-75-48	48V, 0~1.6A	±1.0%	150mV	88.5%		

■ 120W EDR-120						
Model No.	Output	Tol.	R&N	Effi.		
EDR-120-12	12V, 0~10A	±2.0%	100mV	85.0%		
EDR-120-24	24V, 0~5A	±1.0%	120mV	87.5%		
EDR-120-48	48V, 0~2.5A	±1.0%	150mV	88.5%		

■ 150W			Е	DR-150	
Model No.	Output (230VAC/115VAC)	Tol.	R&N	Effi.	
EDR-150-24	24V, 0~6.5A / 0~5.2A	±1.0%	150mV	87%	

EDR vs. NDR

Difference Series	ЕМІ	Working Temp.	Warranty
EDR	Class A	-20~+60°C	2 years
NDR	Class B	-20~+70°C	3 years

DIN Series 60~480W Slim and Ultra Wide Input Range





■ Features

- Single or two phase ultra wide input range 180~550VAC
- Built-in active PFC function (WDR-240/480)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- DC output voltage adjustable
- Built-in constant current limiting circuit
- Can be installed on DIN rail TS-35 / 7.5 or 15
- Over voltage category III (WDR-60)
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 3 years warranty

Model No.		WDR-60	WDR-120	WDR-240	WDR-480	
AC input voltage r	ange	180~550VAC(single or two phase)	; 254~780VDC			
AC input current		0.3A / 400VAC, 0.6A / 230VAC	0.55A / 400VAC, 1.2A / 230VAC	1A / 400VAC, 2A / 230VAC	1.6A / 400VAC, 4A / 230VAC	
AC inrush current	(max.)	Cold start, 50A at 400VAC			'	
DC adjustment range						
Overload protection Hiccup mode when output voltage <50%, constant current limiting within 50~100% rated output voltage, auto-recovery Hiccup mode when output voltage <50%, constant current limiting power, constant current limiting, auto-recovery 105%~130% rated output power, constant current limiting, auto-recovery after 1 minute if the fault condiction		n after 3 sec.; auto-recover				
	Range	5.7~7.5V for 5V model (WDR-60), 16~	18V for 12V model, 29~33V for	29~33V for 24V model, 56~65V for 48V model		
Over voltage protection	Туре	Shut down o/p voltage, re-power on to recover		Shut down o/p voltage, 1 minute if the fault co		
Over temp. protect	tion	Shut down output voltage, recovers automatically after temperature goes down				
1/P-0/P:4.7kVAC,		,				
Isolation resistand	e	100MΩ(min.)@500VDC				
Working temperatu	ıre	-30~+85°C	-25~+70°C	-30~+70°C (refer to out	put derating curve)	
DC OK signal		Relay Contact				
Safety standards		UL61010, TUV BS EN/EN61558-2-16, AS/NZS62368.1, EAC TP TC004	UL508, AS/NZS62368.1, EAC TP TC 004 , BS EN/EN62368-1 approved; Design refer to GL			
EMC standards			BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 (EN50082-2), EN61204-3; EAC TP TC 020, heavy industry level			
Connection (screw DIN termina	l)	I/P: 3 poles, O/P: 4 poles		I/P: 3 poles, O/P: 6 pol	es	
Dimension (WxHxD)(mm)		32x125.2x102	40x125.2x113.5	63x125.2x113.5	85.5x125.2x128.5	

60W		્રા		EN[EKC€
Model No.	Output	Tol.	R&N	Effi.
WDR-60-05	5V, 0~10A	±1.5%	100mV	83.5%
WDR-60-12	12V, 0~5A	±1.5%	120mV	86.5%
WDR-60-24	24V, 0~2.5A	±1.0%	150mV	89.0%
WDR-60-48	48V, 0~1.25A	±1.0%	200mV	90.5%

120W		c(₩ <u>®</u> [][(CB CKCE
Model No.	Output	Tol.	R&N	Effi.
WDR-120-12	12V, 0~10A	±1.5%	120mV	89.5%
WDR-120-24	24V, 0~5A	±1.0%	120mV	91%
WDR-120-48	48V, 0~2.5A	±1.0%	150mV	92%

240W		P	@@[ff[0	CB LKC€
Model No.	Output	Tol.	R&N	Effi.
WDR-240-24	24V, 0~10A	±1.0%	150mV	91%
WDR-240-48	48V, 0~5A	±1.0%	150mV	91%

480W	®®&⊞CBK€			
Model No.	Output	Tol.	R&N	Effi.
WDR-480-24	24V, 0~20A	±1.0%	100mV	92%
WDR-480-48	48V, 0~10A	±1.0%	150mV	93%



DIN Series 240~960W Slim 3-phase High Input Voltage





Features

- 3-phase, 340~550VAC wide range input (2-phase operation possible)
- · Slim width
- Built-in active PFC function (TDR-480/960)
- Built-in passive PFC function (TDR-240)
- High efficiency up to 94.5%
- · Protections:

Short circuit / Overload / Over voltage / Over temperature

- · Cooling by free air convection
- · DC output voltage adjustable
- · Built-in constant current limiting circuit
- Can be installed on DIN rail TS-35/7.5 or 15
- UL508 / UL61010-1 Industrial control equipment approved
- Current sharing up to 3840W(3+1) for TDR-960
- Built-in DC OK relay contact (optional for TDR-480)
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.		TDR-240	TDR-480	TDR-960		
AC input vo	Itage range	3-phase 340~550VAC (2-phase operation possible), 480~780VDC				
AC input cu	rrent (Typ.)	0.69A / 400VAC, 0.6A / 500VAC	0.85A / 400VAC, 0.7A / 500VAC	2.0A / 400VAC, 1.4A / 500VAC		
DC adjustme	ent range	24V: 24~28V, 48V: 48~55V				
Overload protection		105%~130% rated output power, constant current limiting, unit will shut down after 3 sec., re-power on to recover 105%~130% rated output power, constant current limiting, unit will hiccup after 3 sec.(TDR-240)				
	Range	29~33V for 24V model, 56~65V for 48V m	odel (30~36V for TDR-240-24)			
Over voltage protection Type		Shut down o/p voltage, re-power on to recover Hiccup mode, recovers automatically after temperature goes down.				
Over tempera	ture protection	Shut down o/p voltage, auto-recovery after temperature goes down				
Withstand v	oltage	I/P-O/P:4.87kVAC I/P-FG:2.4kVAC O/P-FG:0.5kVAC O/P-DC OK: 0.5kVAC	I/P-O/P:3kVAC I/P-FG:2kVAC O/P-FG:0.5kVAC O/P-DC OK: 0.5kVAC(TDR-960; optional for TDR-480)			
Working tem	perature	-30~+70°C (refer to output derating curve)				
Safety standards		UL61010-1, UL61010-2-201, AS/NZS62368.1, EAC TP TC 004, BS EN/EN61558-2-16 approved	UL508, IEC62368-1, AS/NZS62368.1, EAC TP TC 004 approved; UL62368-1 for TDR-480			
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61204-3, EN55024,EN61000-6-2, heavy industry level; EAC TP TC 020				
Connection (screw DIN to	erminal)	I/P: 4 poles, O/P: 4 poles	I/P: 4 poles, O/P: 6 poles			
Dimension (WxHxD)(mm)		63x 125.2x 113.5	85.5x 125.2x 128.5	110x125.2x150		

® BEHELENCE **240W** Model No. Tol. R&N Effi. Output TDR-240-24 24V, 0~10A ±1.0% 100mV 92% TDR-240-48 48V. 0~5A ±1.0% 120mV 92%

480W	R	@ c W us &	MICE	SR C€
Model No.	Output	Tol.	R&N	Effi.
TDR-480-24	24V, 0~20A	±1.0%	150mV	92.5%
TDR-480-48	48V, 0~10A	±1.0%	150mV	93%

960W	Para		SHICE	B FR C €
Model No.	Output	Tol.	R&N	Effi.
TDR-960-24	24V, 0~40A	±1.0%	180mV	94.0%
TDR-960-48	48V, 0~20A	±1.0%	250mV	94.5%

WDR vs. TDR	
-------------	--

Difference Series	AC Input Voltage
WDR	1φ; 180~550VAC
TDR	3φ; 340~550VAC



DIN Series 40W & 60W Output Current Programmable





Features

- · Universal AC input / Full range
- Io can be trimmed 10~100% by 1~10Vdc, PWM signal or
- · Installed on DIN rail TS-35 / 7.5 or 15
- · Protections: Short circuit / Overload / Over voltage
- · Pass LPS
- Cooling by free air convection

- DC output voltage adjustable
- · LED indicator for power on
- · Suitable for machine vision inspection system and plant cultivation application
- · 3 years warranty



Model No. DRA-40 DRA-60		DRA-60				
AC input vo	Itage range	90~264VAC; 127~370VDC				
AC inrush c	urrent (max.)	Cold start, 60A at 230VAC				
DC adjustm	ent range	12V: 12~15V, 24V: 24~30V				
Current adj	ustment range	10%~100% rated output current adjustable by 1~10VDCc, PWM signal or resistance				
Overload	Range	95%~108%				
protection	Туре	Constant current limiting, auto-recovery				
Over voltage	protection	120%~155% rated output power, shut down o/p voltage, re-power on to recover				
Withstand v	oltage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC				
Working ten	nperature	-30~+70°C (refer to output derating curve)				
Safety stan	dards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved				
EMC standa	rds	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61204-3; EAC TP TC 020				
Connection (screw DIN terminal)		I/P: 3 poles, O/P: 6 poles screw DIN terminal				
Dimension (WxHxD)(mm)	40x 90x 100				

40W				DRA-40
Model No.	Output	Tol.	R&N	Effi.
DRA-40-12	12V, 0~3.34A	±1.0%	120mV	85%
DRA-40-24	24V, 0~1.7A	±1.0%	150mV	87%

■ 60W				DRA-60
Model No.	Output	Tol.	R&N	Effi.
DRA-60-12	12V, 0~5A	±1.0%	120mV	85%
DRA-60-24	24V, 0~2.5A	±1.0%	150mV	87%

20A & 40A Redundancy Module






■ Features


- Output current 20A & 40A
- Support 1+1 and N+1 redundancy system
- Suitable for redundancy operation of 12V/24V/48V system
- 2 channels input and 1 output
- -40~+80°C ultra wide operation temp.
- 2 dry relay contact for monitoring output status, and LED indicator for input failure alarm
- Slim width
- Installed on DIN rail TS-35/7.5 or 15
- 3 years warranty

ERDN20/40 series, enclosed type modules are available on P.28



Model No.		DRDN20 24		DRDN40 24					
		12	24	48	12	24	48		
	DC input voltage range		9~14Vdc	19~29Vdc	36~60Vdc	9~14Vdc	19~29Vdc	36~60Vdc	
	Rated cui	rrent	10Ax2 input, 20A	x1 input		20Ax2 input, 40A	x1 input		
Input	Peak cur	rent	15Ax2 input, 30A	x1 input		30Ax2 input, 60A	x1 input		
	Voltage d	rop (Vin-Vout)	0.2~0.5Vdc max.						
	Reverse	voltage (max.)	40Vdc	40Vdc	65Vdc	40Vdc	40Vdc	65Vdc	
	Rated cu	rrent	20A			40A			
Output	Peak current		30A, 5 sec. 60A, 5 sec.						
	Standby power losses		1.5W Typ.						
	Relay co	ntact	2 dry relay contact, 30Vdc resistive load for each chanel						
	Input	Voltage range	<8.5V or >14.7V	<18V or >31V	<34.2V or >63V	<8.5V or >14.7V	<18V or >31V	<34.2V or >63V	
	voltage alarm	LED display	Green: OK, dark:	Green: OK, dark: input voltage failure					
	Working temperature		-40~+80°C						
	Protectio	ns	Overload or short circuit, <30A for 5 sec. no damage						
General	Cooling		Free air convection						
	Safety sta	andards	UL62368-1, EAC TP TC 004 approved						
	EMC stan	dards	BS EN/EN55032 class B, EN61000-4,2,3,4,5,6,8						
	Connection (Screw DI	on N terminal)	I/P: 4 poles(V _{in1} an FG); 4 poles (Alarr	, ,	1 1	I/P: 4 poles(V _{in1} andV _{in2} ±), O/P 2 poles (Vo ₁ /Vo ₂), FG 1 pole; 2+2 poles (Alarm ₁ and Alarm ₂ dry relay contact)			
	Dimension (WxHxD)(mm)		32x 125.2x 102			55x 125.2x 113.5			







20A &40A Buffer Module





■ Features

- Buffering with electrolytic capacitors instead of battery, save maintance cost
- · Suitable for 24Vdc systems
- · Buffering time: 350ms@20A load; 250ms@40A load
- Buffer mode selectable by switch :
 Fixed mode at 22Vdc or dynamic mode for Vin-1V
- Support parallel connection to extend buffering time
- · -25~+75°C operating temperature
- 3 years warranty



Model No.			DBUF20	DBUF40	
	DC normal operating mode		24Vdc	'	
Charging mode	Charging volta	ıge	23~30Vdc		
	Charging curre	ent	900mA Max.		
	Current consu	mption at standby	100mA Max.		
	Chamina tima		15s Typ.	25s Typ.	
	Charging time		25s Max.	35s Max.	
	DC normal ope	erating voltage	22Vdc / Vin-1Vdc		
Buffer	DC operating vo	Itage range	22-29Vdc		
mode	Output current (max.)		20A	40A	
	Ripple & Noise (max.)		200mVp-p		
Protection	Protection		Over voltage / Overload / Short circuit / Reverse polarity		
	Selectable by	Fix 22Vdc(Default)	Buffering starts if terminal voltage falls below 22Vdc		
	switch	Vin-1Vdc	Buffering starts if terminal voltage is decreased by >1Vdc		
	Control	Inhibit(I)	+>:Vs-V(I)<6Vdc: Buffer module ONVs-V(I)>10Vdc: Buffer module OFF		
	Control		35Vdc/4mA Max.		
Function		Ready(R)	Charged ready: V(R)>+Vs - 2Vdc; Unready: V(R)<1Vdc		
		Keauy(K)	35Vdc/10mA Max.		
		Buffering(B)	Buffering: V(B)>+Vs - 2Vdc; Other mode: V(B)<1Vdc		
		Bulleting(D)	35Vdc /10mA Max.		
		Supply Voltage(+Vs)	10~35Vdc/10mA(Connected to +V or external voltage)		
Working to	emperature		-25~+75°C (refer to output derating curve)		
Safety sta	ndards		IEC62368-1,UL62368-1 approved		
EMC stand	lards		BS EN/EN55032 class B, EN61000-4-2,3,4,5,6,8		
Connectio	n (screw DIN terr	minal)	Parallel: 4 poles(+Vx2, -Vx2), Function: I(Inhibit), R(Ready), B(Buffering), FG		
Dimension	(WxHxD)(mm)		63x 125.2x 114.9		

■ 20A		DBUF20	■ 40A			DBUF40
Model No.	DC Operating Voltage Range	Buffer Time	Model	No.	DC Operating Voltage Range	Buffer Time
		350ms@20A				250ms@40A
DBUF20-24	22~29Vdc	700ms@10A	DBUF4	40-24	22~29Vdc	500ms@20A
		45s@0.1A				42s@0.1A

20A & 40A Uuinterruptible DC UPS Module





■ Features

- Uninterruptible DC-UPS controller
- Parallel connected to DC BUS
 (Power supply + DC-UPS Module + Batteries + Load)
- · Allows 4AH~135AH lead-acid various battery capacities
- Complete diagnostic and monitoring for DC BUS OK, battery discharge, battery fail
- · LED indicator for signal status

- Protections: Battery reverse polarity protection & Short circuit(By internal fuse) /Battery discharge / Over discharge current
- · Cooling by free air convection
- · Suitable for 24V system
- · 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No. DUPS20 DUPS40			DUPS40		
	Discharger Current		0~20A	0~40A	
DC BUS		ge	21~29Vdc		
DC BO2	PSU Voltage		24~29Vdc		
	Charging	Current(typ.)	2A		
	Normal BA	T Voltage	24Vdc(2x12Vdc in series or 1x24Vdc)		
Battery	BAT Type		Lead-acid battery		
	External b	attery(typ.)	24Vdc, 4AH~135AH		
	BAT Polar	ity	By internal fuse		
B	Short Circuit		This protection only works when batteries are not connected. External fuse is recommended and when batteries are connected		
Protections	Over discharge current		21~26A	42~52A	
			After 5 sec., unit will cut-off battery discharge by RELAY		
	BAT deep	discharge	Cut-off battery discharge by RELAY		
	DC BUS RELAY status		Short when DC voltage between 21~29Vdc(±2%), RELAY contact		
	OK	LED(Green)	DC BUS OK: Light, DC BUS fail: Dark		
	BAT fail	RELAY status	Short when battery voltage falls below 22Vdc(±2%)or battery failure is observed through the battery test function,RELAY contact		
Functions		LED(Red)	Battery over-discharge warning or battery broken:Lie Battery OK:Dark	ght	
	BAT	RELAY status	Short when battery in discharge condition, RELAY co	ntact	
	discharge	LED(Yellow)	Battery discharge:Light Battery is not discharge:Dark		
Working te	mperature		-30~+70°C (refer to output derating curve)		
Safety stan	dards		EAC TP TC 004 approved		
EMC standa	ards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61204-3, EAC TP TC 020		
Connection (screw DIN			I/P: 2 poles, O/P: 2 poles screw DIN terminal, Single Output: 6 poles		
Dimension	(WxHxD)(m	ım)	40x 125.2x 113.5	63x 125.2x 113.5	

Model No. DC BUS Voltage DC BUS Current DUPS20 24-29Vdc 20A DUPS40 24-29Vdc 40A



40A Uninterruptible DC UPS Module





■ Features

- · Battery controller for DIN rail UPS system
- · Parallel connected to DC BUS
- · Suitable for 24V system up to 40A
- Installed on DIN Rail TS-35 / 7.5 or 15
- Built-in battery test function
- · Battery polarity protection
- Relay contact signal output and LED indicator for DC BUS OK, Battery Fail, and Battery Discharge
- · Cooling by free air convection
- · 3 years warranty


It is highly recommended to use DUPS40 for all new project


EHIKK C€

Model No.			DR-UPS40
	Discharge Current		0~40A
DO DUO	BAT voltage	е	21~29Vdc
DC BUS	PSU Voltag	е	24~29Vdc
	Charging c	urrent (typ.)	2A
Battery	External ba	ttery (typ.)	24Vdc, 4AH / 7AH / 12AH
	DC BUS OK	Relay status	Short when DC voltage between 21~29V(±3%), relay contacts
		LED(Green)	DC bus OK : Light; DC bus fail : Dark
Functions	BAT fail	Relay status	Short when battery failure is observed through the battery test function, relay contacts
runctions		LED(Red)	Battery over-discharge warning or battery broken: Light; Battery OK: Dark
	BAT	Relay status	Short when battery in discharge condition, relay contacts
	discharge	LED(Yellow)	Battery discharging: light; Battery is not discharging or discharging current <2A: Dark
Working te	mperature		-20~+70°C
EMC standa	ards		BS EN/EN55032 class B, EN61000-4-2,3,4,5,6,8,11; EAC TP TC 020
Connection			I/P: 2 poles, O/P: 2 poles screw DIN terminal, Single output: 6 poles
Dimension (WxHxD)(mm)		55.5 x 125.5 x 100

■ 40A DR-UPS40

Model No.DC BUS VoltageDC BUS CurrentDR-UPS4024~29V40A max.

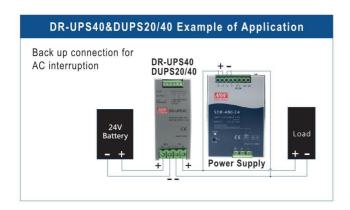



16A & 28A AC Inrush Current Limiter



FAILFRCE



■ Features

- DIN Rail type or terminal block mounted
- ICL-16: 23A inrush current limiting, 16A continuous ICL-28: 48A inrush current limiting, 28A continuous
- 180~264VAC input

EMC standards

Dimension (mm)

Connection

Integrated by pass relay, no simple NTC

- Internal thermal protection
- -30~+70°C wide operating temperature
- Over voltage category III
- Operating altitude up to 5000 meters
- Installed on DIN Rail TS-35/7.5 or 15 (ICL-16R/28R)

■ General Specification (Please refer to www.meanwell.com for detail spec.)

General Specification (Please refer to www.meanweil.com for detail spec.)						THE CH C	
Model No.		ICL-16R	ICL-16L		ICL-28R	ICL-28L	
AC input volta	age range	180~264VAC, 50/60Hz					
AC inrush cur	rent limiting	23A max., 16A continuous			48A max. 28A	continuous	
AC input pow	er	3680VA (16Ax 230VAC)			6440VA (28Ax	(230VAC)	
AC input con	sumption	<1.5W at 264VAC input			<2W at 264VA	<2W at 264VAC input	
Internal relay limiting time (Ton power on)		300±50ms					
Internal relay	Limiting cycle	PSU setup time <250ms 1 cycle / 5min	PSU setup time 250~350ms 1 cycle / 1min	PSU setup time >350ms 5 cycle / 1min	3 cycle / 1min	ı	
	Release time	500±50ms					
Internal prote	ction	Thermal fuse protects overload and fire					
Load capacity		2500µF max. 6000µF max.					
Working temperature		-30~+70°C					
Safety standards		IEC62368-1 (LVD)	IEC62368-1 (LVD)				

BS EN/EN55032 class B, EN61000-3-2, EN6100-4-2,3,4,5,6,8,11, EAC TP TC020

ICL-16R/28R: I/P: 2 poles, O/P: 2 poles (Screw DIN terminal);

175x 42x 24

(LxWxH)


ICL-16L/28L: I/P: 2 poles, O/P: 2 poles (Terminal block)

■ 16A		ICL-16R/L
Model No.	Inrush Current	Type.
ICL-16R	16A	DIN Rail
ICL-16L	16A	Terminal Block

35x 90x 54.5

(WxHxD)

■ 28A		ICL-28R/L
Model No.	Inrush Current	Туре.
ICL-28R	28A	DIN Rail
ICL-28L	28A	Terminal Block



52.5x 90x 54.5

175x 42x 24



Open Frame

50~150W Single Output





■ Features

- Universal AC input / Full range
- Built-in active PFC function (LPP-100/150)
- Protections: Short circuit / Overload / Over voltage
- Optional over temperature protection for LPP-150
- Built-in remote ON/OFF control (LPS-50/75)
- Cooling by free air convection
- 2 years warranty for LPS series 3 years warranty for LPP series

LPS-50	LPS-75	LPS/LPP-100	LPP-150
195 185 185 001 001 001 001	222 212 212 318 318 318 318 318 318 318 318 318 318	222 212 212 213 214 215 217 217 217 217 217 217 217 217 217 217	5 222 212 212 212 213 214 215 214 215 216 217 217 217 217 217 217 217 217 217 217
		4-938	17 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

General Specification (Please refer to www.meanwell.com for detail spec.)

Specificati	on (Please refer to www.	meanwell.com for deta	il spec.)	C US STORY OF THE	MCB 器Ce
	LPS-50	LPS-75	LPS-100	LPP-100	LPP-150
age range	90~264VAC	I	115/230 auto switch	85~264VAC	
rent (230VAC)	35A	36A	60A	30A	55A
t range	±10% rated output voltage			-5%~+10% rated outp	ut voltage
Range	122%~160%	115%~150%	105%~140%	105%~150% rated output power	
Туре	Hiccup mode, auto recovery			Constant current limit	ing, auto recovery
Range	110%~135% of rated output	voltage			
Туре	Hiccup mode, auto recovery			Shut off, AC recycle to	o re-start
tage	I/P-O/P: 3kVAC, I/P-FG:1.5k	VAC(2kVAC for LPP-150), C)/P-FG: 0.5kVAC, 1 minute	е	
erature	-20~+70°C (refer to output d	erating curve)	-10~+60°C (refer to out	put derating curve)	
rds	UL62368-1, TUV BS EN/EN6	2368-1, EAC TP TC 004 ap	proved		
ls	BS EN/EN55032 class B, EN610	000-3-2,3, EN61000-4-2,3,4,5,6	,8,11 (EN61000-6-2 heavy in	dustry level for LPS-50/75	only); EAC TP TC 020
	JST B5P / B4P-VH	JST B5P / B6P-VH	JST B5P / B8P-VH JST B5P / B6Px2-V		
	age range rrent (230VAC) t range Range Type Range Type tage erature	LPS-50 age range 90~264VAC rrent (230VAC) 35A t range ±10% rated output voltage Range 122%~160% Type Hiccup mode, auto recovery Range 110%~135% of rated output Type Hiccup mode, auto recovery tage I/P-O/P: 3kVAC, I/P-FG:1.5k' erature -20~+70°C (refer to output of the coupt of the c	LPS-50 LPS-75 age range 90~264VAC rrent (230VAC) 35A 36A tt range ±10% rated output voltage Range 122%~160% 115%~150% Type Hiccup mode, auto recovery Range 110%~135% of rated output voltage Type Hiccup mode, auto recovery tage I/P-O/P: 3kVAC, I/P-FG:1.5kVAC(2kVAC for LPP-150), Cerature -20~+70°C (refer to output derating curve) rds UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 ap Is BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6	LPS-50 LPS-75 LPS-100 age range 90~264VAC 115/230 auto switch rent (230VAC) 35A 36A 60A trange ±10% rated output voltage Range 122%~160% 115%~150% 105%~140% Type Hiccup mode, auto recovery Range 110%~135% of rated output voltage Type Hiccup mode, auto recovery tage 1/P-O/P: 3kVAC, I/P-FG:1.5kVAC(2kVAC for LPP-150), O/P-FG: 0.5kVAC, 1 minuterature -20~+70°C (refer to output derating curve) -10~+60°C (refer to output derating curve) UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved IS BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11 (EN61000-6-2 heavy in	LPS-50 LPS-75 LPS-100 LPP-100 age range 90~264VAC 115/230 auto switch 85~264VAC rrent (230VAC) 35A 36A 60A 30A tt range ±10% rated output voltage -5%~+10% rated outp Range 122%~160% 115%~150% 105%~140% 105%~150% rated out Type Hiccup mode, auto recovery Constant current limit Range 110%~135% of rated output voltage Type Hiccup mode, auto recovery Shut off, AC recycle to tage 1/P-O/P: 3kVAC, I/P-FG:1.5kVAC(2kVAC for LPP-150), O/P-FG: 0.5kVAC, 1 minute erature -20~+70°C (refer to output derating curve) -10~+60°C (refer to output derating curve) IS BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11 (EN61000-6-2 heavy industry level for LPS-50/75)

222x 62x 32

222x 55x 30

50W				LPS-50
Model No.	Output	Tol.	R&N	Effi.
LPS-50-3.3	3.3V, 0~10A	±3%	50mV	75%
LPS-50-5	5V, 0~10A	±3%	50mV	81%
LPS-50-12	12V, 0~4.2A	±2%	80mV	82%
LPS-50-15	15V, 0~3.4A	±2%	80mV	84%
LPS-50-24	24V, 0~2.1A	±1%	80mV	85%
LPS-50-48	48V, 0~1.1A	±1%	100mV	86%

195x 55x 23

Dimension (LxWxH)(mm)

■ 75W				LPS-75
Model No.	Output	Tol.	R&N	Effi.
LPS-75-3.3	3.3V, 0~15A	±3%	80mV	69%
LPS-75-5	5V, 0~15A	±3%	80mV	77%
LPS-75-12	12V, 0~6.2A	±2%	100mV	80%
LPS-75-15	15V, 0~5.0A	±2%	100mV	81%
LPS-75-24	24V, 0~3.2A	±2%	120mV	83%
LPS-75-48	48V, 0~1.56A	±2%	120mV	83%

■ 100W				PS-100
Model No.	Output	Tol.	R&N	Effi.
LPS-100-3.3	3.3V, 0~20A	±3%	150mV	69%
LPS-100-5	5V, 0~20A	±3%	100mV	77%
LPS-100-7.5	7.5V, 0~13.3A	±2%	100mV	77%
LPS-100-12	12V, 0~8.4A	±2%	100mV	79%
LPS-100-13.5	13.5V, 0~7.5A	±2%	100mV	79%
LPS-100-15	15V, 0~6.7A	±2%	100mV	80%

100W (with	PEC Function)			I PP-100
LPS-100-48	48V, 0~2.1A	±1%	200mV	81%
LPS-100-27	27V, 0~3.8A	±1%	150mV	81%
LPS-100-24	24V, 0~4.2A	±1%	150mV	80%

222x 62x 33.6

222x 75x 41

LPP-150

I TOO VV (VVILII	rr c r unction)			FF-100
Model No.	Output	Tol.	R&N	Effi.
LPP-100-3.3	3.3V, 0~20A	±2%	100mV	69%
LPP-100-5	5V, 0~20A	±2%	100mV	75%
LPP-100-7.5	7.5V, 0~13.5A	±2%	100mV	76%
LPP-100-12	12V, 0~8.5A	±2%	100mV	79%
LPP-100-13.5	13.5V, 0~7.5A	±2%	100mV	79%
LPP-100-15	15V, 0~6.7A	±2%	100mV	80%
LPP-100-24	24V, 0~4.2A	±1%	150mV	83%
LPP-100-27	27V, 0~3.8A	±1%	150mV	83%
LPP-100-48	48V, 0~2.1A	±1%	250mV	83%

■ 150W (with PFC Function)

Model No.	Output	Tol.	R&N	Effi.	
LPP-150-3.3	3.3V, 0~30A	±2%	100mV	70%	
LPP-150-5	5V, 0~30A	±2%	100mV	76%	
LPP-150-7.5	7.5V, 0~20A	±2%	100mV	80%	
LPP-150-12	12V, 0~12.5A	±2%	100mV	82%	
LPP-150-13.5	13.5V, 0~11.2A	±2%	100mV	83%	
LPP-150-15	15V, 0~10A	±2%	100mV	83%	
LPP-150-24	24V, 0~6.3A	±1%	150mV	85%	
LPP-150-27	27V, 0~5.6A	±1%	150mV	85%	
LPP-150-48	48V, 0~3.2A	±1%	250mV	85%	



Open Frame

5~65W Single, Dual and Triple Output













75x 40x 20 mm

107x 61x 28 mm

127x 76x 28 mm

127x 76x 42 mm

127x 76x 42 mm

Features

- Universal AC input / Full range
- Cooling by free air convection
- Protections: Short circuit / Overload / Over temp. / Over voltage(PS-05/PD-25 only)
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	PS-05	PD-25	PD/PT-45	PD/PT-65	PT-6503	
AC input voltage range	85~264VAC; 120~370VDC		90~264VAC; 120~370	VDC		
Leakage current (at 240VAC)	Less than 0.5mA		Less than 0.75mA		Less than 1.0mA	
AC inrush current (max.)	Cold start, 30A at 230VAC	Cold start, 36A at 230VAC	Cold start, 30A at 230VAC	Cold start, 40A at 230VAC		
Overload protection	>105% hiccup mode, auto-	recovery	53~75W hiccup mode, auto-recovery 73~105W hiccup mode, auto-recovery		120%~160% hiccup mode, auto-recovery	
Over voltage protection	115%~150%	115%~135%	CH1: 115%~135% rated output voltage			
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG:1.5kVAC	I/P-O/P: 3kVAC, I/P-FG:2kVAC	I/P-O/P: 3kVAC, I/P-FG	:1.5kVAC		
Safety standards	EAC TP TC 004	UL62368-1, TUV BS EN/8	N62368-1, EAC TP TC	004 approved		
EMC standards	BS EN/EN55032 class B, EN61000-3-2,3, EAC TP TC 020 EN61000-4-2,3,4,5,6,8,11	BS EN/EN55032 class B, EN61000-3-2,3, EAC TP TC 020 EN61000-4-2,3,4,5	BS EN/EN55032 class B,		BS EN/EN55032 class B, EN61000-3-2, EAC TP TC 020, EN61000- 4-2,3,4,6,11	
Connection	3P/ 5mm, 2P/ 3.96mm pitch, Molex 5285-03,5273-02	3P, 4P/ 3.96mm pitch, Molex P/N: 41791-03, 04	2P, 6P/ 3.96mm pitch, Molex 5277-02 / 5273-06	2P, 6P/ 3.96mm pitch, Molex P/N: 5277-02, 5273-06	2P, 8P/ 3.96mm pitch, Molex: 5277-02, 5273-08	

5 W				PS-05
Model No.	Output	Tol.	R&N	Effi.
PS-05-5	5V, 0~1.0A	±2%	100mV	70%
PS-05-12	12V, 0~0.45A	±2%	120mV	75%
PS-05-15	15V, 0~0.35A	±2%	120mV	75%
PS-05-24	24V, 0~0.22A	±2%	200mV	76%
PS-05-48	48V, 0~0.11A	±1%	200mV	76%

25W					PD-25
Model No.	Output	Tol.	R&N	Effi.	Max.
PD-25A	5V, 0.2~2.5A	±2%	50mV	71%	25W
	12V, 0.1~1.5A	±6%	150mV		
PD-25B	5V, 0.2~2.0A	±2%	50mV	77%	25W
	24V, 0.1~1.0A	±6%	200mV		
PD-2505	5V, 0.1~3.0A	±6%	50mV	73%	25W
	-5V, 0.1~2.5A	±6%	50mV		
PD-2512	12V, 0.1~1.2A	±4%	50mV	74%	24W
	-12V, 0.1~1.2A	±4%	50mV		
PD-2515	15V, 0.1~1.0A	±4%	50mV	75%	24W
	-15V, 0.1~1.0A	±4%	50mV		

■ 45W					PD-45
Model No.	Output	Tol.	R&N	Effi.	Max.
PD-45A	5V, 0.4~5.0A	±4%	50mV	77%	40W
	12V, 0.2~2.5A	±7%	120mV		
PD-45B	5V, 0.4~5.0A	±4%	50mV	78%	45W
	24V, 0.2~1.8A	±7%	120mV		
CEM					DD CE
■ 65W					PD-65
Model No.	Output	Tol.	R&N	Effi.	Max.
PD-65A	5V, 0.4~7.0A	±4%	50mV	78%	61W
	12V, 0.2~3.2A	±7%	120mV		

±4%

±7%

50mV

150mV

81%

45W					PT-45
Model No.	Output	Tol.	R&N	Effi.	Max.
PT-45A	5V, 0.4~5.0A	±4%	50mV	75%	41W
	12V, 0.2~2.5A	±7%	120mV		
	-5V, 0.0~0.5A	±5%	50mV		
PT-45B	5V, 0.4~5.0A	±4%	50mV	75%	43W
	12V, 0.2~2.5A	±7%	120mV		
	-12V, 0.0~0.5A	±5%	100mV		
PT-45C	5V, 0.4~5.0A	±4%	50mV	75%	44W
	15V, 0.2~2.3A	±7%	120mV		
	-15V, 0.0~0.5A	±5%	100mV		

65W					PT-65
Model No.	Output	Tol.	R&N	Effi.	Max.
PT-65A	5V, 0.4~7.0A	±4%	50mV	76%	60W
	12V, 0.2~3.2A	±7%	120mV		
	-5V, 0.0~0.7A	±5%	50mV		
PT-65B	5V, 0.4~7.0A	±4%	50mV	77%	64W
	12V, 0.2~3.2A	±7%	120mV		
	-12V, 0.0~0.7A	±5%	100mV		
PT-65C	5V, 0.4~7.0A	±4%	50mV	77%	65W
	15V, 0.2~2.6A	±7%	120mV		
	-15V, 0.0~0.7A	±5%	100mV		
PT-65D	5V, 0.5~5.0A	±4%	50mV	79%	68W
	12V, 0.2~4.0A	±6%	100mV		
	24V, 0.2~1.3A	±6%	200mV		
65W				Р	T-6503

■ 65W	65W					
Model No.	Output	Tol.	R&N	Effi.	Max.	
PT-6503	3.3V, 0.0~7.0A	±3%	50mV	72%	62W	
	5V, 0.2~10A	+4%,-2%	50mV			
	12V, 0.0~1.2A	±8%	100mV			



66W

5V, 0.4~6.0A

24V, 0.2~2.6A

PD-65B

Open Frame

65~250W Dual, and Triple Output









■ Features

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over Temp.(PID-250)
- 2 years warranty (RPD/T-65) 3 years warranty (RPT-125/PID-250)

	c 911 ° us	TOPE Training and before the property of the p	EHIC	B	KC.	(
(PPT-125/PID-250)						

Model No.	RPD/T-65	PPT-125	PID-250
AC input voltage range	90~264VAC; 127~370VDC	90~264VAC; 127~370VDC	
Leakage current	Less than 1mA at 240VAC	Less than 2.0mA at 240VAC	Less than 3.5mA at 240VAC
AC inrush current (max.)	Cold start, 25A at 115VAC, 50A at 230VAC	Cold start, 40A at 230VAC	Cold start, 58A at 230VAC
Overload protection	90~125W hiccup mode, auto-recovery	130%~160% fold back current limiting, auto-recovery	
Over voltage protection	CH1: 115%~135% rated output voltage	CH1:110%~135% rated output voltage	CH1: 115%~140%, CH2: 110%~135%
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, 1minute		I/P-O/P:3.0kVAC, I/P-FG:2kVAC, 1minute
Safety standards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004	4 approved	
EMC standards	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020	BS EN/EN55032 class B, EN61000-3-2,-3 EN61000-4-2,3,4,5,6,8,11, EN61000-6-2, EAC TP TC 020
Connection	3P, 6P/ 3.96mm pitch, Molex P/N: 5273-03, 5273-06	3+5Px2 /3.96mm pitch, JST: B3P/B5Px2-VH	5+10+2P/3.96mm pitch, JST B5P/B10P-VH, B2B-XH

■ 65W RPD-							
Output	Tol.	R&N	Effi.	Max.			
12V, 0~5.8A	±2%	120mV	79%	60W			
5V, 0~1.5A	±5%	50mV					
24V, 0~2.9A	±2%	150mV	81%	60W			
5V, 0~1.5A	±5%	50mV					
	12V, 0~5.8A 5V, 0~1.5A 24V, 0~2.9A	12V, 0~5.8A ±2% 5V, 0~1.5A ±5% 24V, 0~2.9A ±2%	12V, 0~5.8A ±2% 120mV 5V, 0~1.5A ±5% 50mV 24V, 0~2.9A ±2% 150mV	Output Tol. R&N Effi. 12V, 0~5.8A ±2% 120mV 79% 5V, 0~1.5A ±5% 50mV 24V, 0~2.9A ±2% 150mV 81%			

■ 65W				R	PT-65
Model No.	Output	Tol.	R&N	Effi.	Max.
RPT-65E	12V, 0.18~5.8A	±2%	120mV	77%	63W
	5V, 0.0~1.5A	±5%	100mV		
	-5V, 0.0~0.7A	±5%	120mV		
RPT-65F	12V, 0.18~5.8A	±2%	150mV	77%	66W
	5V, 0.0~1.5A	±5%	100mV		
	-12V, 0.0~0.7A	±5%	150mV		
RPT-65G	24V, 0.09~2.9A	±2%	150mV	81%	66W
	5V, 0.0~1.5A	±5%	50mV		
	12V, 0.0~0.7A	±5%	100mV		


■ 125W	PP.	Г-125			
Model No.	Output	Tol.	R&N	Effi.	Max
PPT-125A	3.3V, 1.0~12.5A	±3%	100mV	75%	99W
	5V, 0.8~10.0A	±5%	100mV		
	12V, 0.05~0.63A	±6%	120mV		
PPT-125B	5V, 1.0~14.38A	±3%	100mV	78%	124W
	12V, 0.3~3.75A	±5%	120mV		
	-12V, 0.05~0.63A	±6%	120mV		
PPT-125C	5V, 1.0~13.75A	±3%	100mV	78%	125W
	15V, 0.25~3.13A	±5%	150mV		
	-15V, 0.05~0.63A	±6%	150mV		
PPT-125D	5V, 1.0~8.75A	±3%	100mV	78%	126W
	24V, 0.25~3.13A	±5%	240mV		
	12V, 0.05~0.63A	±6%	120mV		

250W	PID-250			
Model No.	Output	Tol.	R&N	Effi.
PID-250A	12V, 0~15A	±3%	120mV	83%
	5V, 0~5.0A	±2%	50mV	
PID-250B	24V, 0~9.4A	±2%	150mV	86%
	5V, 0~5.0A	±2%	50mV	
PID-250C	36V, 0~6.3A	±2%	200mV	86%
	5V, 0~5.0A	±2%	50mV	
PID-250D	48V, 0~4.7A	±2%	200mV	86%
	5V, 0~5.0A	±2%	50mV	



Green Open Frame 15~65W Single Output Industrial Grade



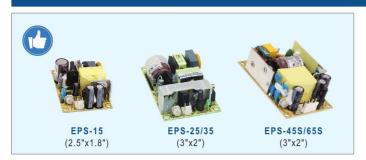

■ Features

- Universal AC input / Full range
- No load power consumption <0.1W(<0.3W for 15~35W)
- High efficiency up to 91%
- Compact size, 1U low profile
- Cooling by free air convection
- Protections: Short circuit / Overload / Over voltage
- · Class I or Class II installations
- LED indicator for power on (EPS-25/35/45S/65S)
- Operating altitude 2000~5000 meters by model
- 3 years warranty



Model No.		EPS-15	EPS-25	EPS-35	EPS-45S	EPS-65S	
AC input vol	tage range	85~264VAC; 120~370VDC			80~264VAC	1	
AC inrush cu	urrent (max.)	Cold start, 45A at 230VAC	Cold start, 35A at 230VAC	Cold start, 40A at 230VAC	Cold start, 60A at 2	30VAC	
DC adjustme	ent range	±10% rated output voltage			-5~+10% rated out	out voltage	
Overload	Range	115%~150% rated output power	115%~170% rated outpu	ut power	115%~150% rated	output power	
protection	Туре	Hiccup mode, auto-recovery					
Over voltage	protection	110%~135% shut down o/p voltage, re-power on to recover					
Withstand vo	oltage	I/P-O/P: 3kVAC, I/P-FG:2kVAC, O/P-FG: 0.5kVAC					
Working tem	perature	-30~+70°C (refer to output dera	-30~+70°C (refer to output derating curve)				
Safety stand	lards	UL62368-1, TUV BS EN/EN62368-1, EN60335-1(EPS-45S/65S), EAC TP TC 004 approved; CCC GB4943.1 for EPS-15					
EMC standar	rds	BS EN/EN55032 class B, EN61	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020 (GB9254, GB17625.1 for I			325.1 for EPS-15)	
Connection Dimension (LxWxH)(mm)		JST B3P/B2P-VH	JST			,	
		63.5x45.7x24	76.2x50.8x24				
	,,,,,,						

■ 15W—Cla	iss I		El	PS-15
Model No.	Output (Rated / Peak 10 sec.)	Tol.	R&N	Effi.
EPS-15-3.3	3.3V, 0~3A / 3.3A	±2%	50mV	75%
EPS-15-5	5V, 0~3A / 3.3A	±2%	50mV	78%
EPS-15-7.5	7.5V, 0~2A / 2.2A	±2%	80mV	81%
EPS-15-12	12V, 0~1.25A / 1.38A	±1%	80mV	82%
EPS-15-15	15V, 0~1A / 1.1A	±1%	100mV	83%
EPS-15-24	24V, 0~0.625A / 0.69A	±1%	150mV	83%
EPS-15-27	27V, 0~0.56A / 0.615A	±1%	180mV	84%
EPS-15-36	36V, 0~0.42A / 0.46A	±1%	200mV	85%
EPS-15-48	48V, 0~0.313A / 0.344A	±1%	200mV	85%

■ 25W—Cla	iss I		El	PS-25
Model No.	Output (Rated / Peak 10 sec.)	Tol.	R&N	Effi.
EPS-25-3.3	3.3V, 0~5A / 5.5A	±2%	60mV	79%
EPS-25-5	5V, 0~5A / 5.5A	±2%	60mV	81%
EPS-25-7.5	7.5V, 0~3.4A / 3.74A	±2%	80mV	83%
EPS-25-12	12V, 0~2.1A / 2.34A	±1%	100mV	86%
EPS-25-15	15V, 0~1.7A / 1.87A	±1%	100mV	87%
EPS-25-24	24V, 0~1.05A / 1.17A	±1%	180mV	88%
EPS-25-27	27V, 0~0.95A / 1.05A	±1%	180mV	89%
EPS-25-36	36V, 0~0.7A / 0.78A	±1%	200mV	89%
EPS-25-48	48V, 0~0.53A / 0.59A	±1%	240mV	90%

■ 35W—Class I EPS-3							
Model No.	Output (Rated / Peak 10 sec.)	Tol.	R&N	Effi.			
EPS-35-3.3	3.3V, 0~6A / 6.6A	±2.5%	60mV	80%			
EPS-35-5	5V, 0~6A / 6.6A	±2.0%	70mV	82%			
EPS-35-7.5	7.5V, 0~4.7A / 5.2A	±2.0%	80mV	84%			

Model No. O	utput (Rated / Peak 10 sec.)	Tol.	R&N	Effi.
EPS-35-12	12V, 0~3A / 3.3A	±1.0%	100mV	87%
EPS-35-15	15V, 0~2.4A / 2.65A	±1.0%	100mV	88%
EPS-35-24	24V, 0~1.5A / 1.65A	±1%	180mV	89%
EPS-35-27	27V, 0~1.3A / 1.45A	±1%	180mV	89%
EPS-35-36	36V, 0~1A / 1.1A	±1%	200mV	89%
EPS-35-48	48V, 0~0.75A / 0.82A	±1%	240mV	90%
■ 45W—Class	II		EPS	S-45S

■ 45W—Cla	EP:	S-45S		
Model No.	Output (Rated / Peak 10 sec.)	Tol.	R&N	Effi.
EPS-45S-3.3	3.3V, 0~8A / 8.8A	±2%	80mV	80%
EPS-45S-5	5V, 0~8A / 8.8A	±2%	80mV	83%
EPS-45S-7.5	7.5V, 0~5.4A / 5.95A	±2%	80mV	85%
EPS-45S-12	12V, 0~3.8A / 4.18A	±2%	120mV	88%
EPS-45S-15	15V, 0~3A / 3.3A	±2%	150mV	89%
EPS-45S-24	24V, 0~1.9A / 2.1A	±1%	240mV	90%
EPS-45S-48	48V, 0~0.94A / 1.03A	±1%	300mV	91%

65W—Cla	ss II		EPS	S-65S	
Model No.	Output (Rated / Peak 10 sec.)	Tol.	R&N	Effi.	
EPS-65S-3.3	3.3V, 0~10A / 11A	±2%	80mV	80%	
EPS-65S-5	5V, 0~10A / 11A	±2%	80mV	84%	
EPS-65S-7.5	7.5V, 0~8A / 8.8A	±2%	80mV	85%	
EPS-65S-12	12V, 0~5.42A / 5.96A	±2%	120mV	88%	
EPS-65S-15	15V, 0~4.34A / 4.77A	±2%	150mV	89%	
EPS-65S-24	24V, 0~2.71A / 2.98A	±1%	240mV	90%	
EPS-65S-48	48V, 0~1.36A / 1.49A	±1%	300mV	91%	



Green Open Frame 45~120W Single Output Industrial Grade MEAN WELL





■ Features

EMC standards

Dimension (LxWxH)(mm)

Connection

- Compact size, 1U low profile
- Universal AC input / Full range
- Class I or Class II installations
- No load power consumption < 0.3W
- High efficiency up to 94%

- Protections: Short circuit / Overload / Over voltage / Over temp.(EPP-120S)
- Cooling by free air convection
- Built-in 12V/0.5A auxiliary output (EPS-120)

3+4P/3.96mm pitch, JST B3P/B4P-VH

PCB: 101.6x50.8x29 ; Case: 103.4x62x37

120W Class I or II

- LED indicator for power on
- Operating altitude up to 5000 meters (EPP-120S)
- 3 years warranty

■ General	Specificat	ion (Please refer to www.meanw	ell.com for detail spec	.) (EPP-120S) c 91 ° us	SEMET CBUKCE		
Model No.		EPP-120S	EPS-45-x	EPS-65-x	EPS-120		
Rated	Fan	NA	NA	NA	120W (10CFM)		
Power	Convection	120W	45W	65W	84W		
AC input voltage range		80~264VAC	90~264VAC	90~264VAC			
DC adjustment range		±5% rated output voltage	±10% rated output voltage		±5% rated output voltage		
Overload	Range	130%~160%	115%~150% rated output power				
protection	Туре	Hiccup mode, auto-recovery	Hiccup mode, auto-recovery				
Over voltage	Range	110%~130%					
protection	Туре	Shut down o/p voltage, re-power on to recover					
Withstand voltage		I/P-O/P: 4kVAC, I/P-FG:2kVAC, O/P-FG: 1.5kVAC, 1 minute	I/P-O/P: 3kVAC, I/P-FG:2kVAC, O/P-FG: 0.5kVAC, 1 minute				
Working temp	perature	-30~+85°C	-30~+70°C (refer to output derating curve)				
Safety standa	ety standards UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, EN60335-1(EPP-120S only) approved			ved			

BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020

■ 120W—Cla	EPP-120S			
Model No.	Output (Convection/Peak 10 sec.)	Tol.	R&N	Effi.
EPP-120S-12	12V, 9.5A / 11.8A	±2%	100mV	91%
EPP-120S-15	15V, 7.6A / 9.5A	±2%	120mV	92%
EPP-120S-24	24V, 5A / 6.25A	±1%	150mV	93%
EPP-120S-27	27V, 4.44A / 5.55A	±1%	150mV	94%
EPP-120S-48	48V, 2.5A / 3.125A	±1%	200mV	93.5%

JST B3P/B4P-VH

76.2x 50.8x 28

■ 45W—Class I EPS-45						
Model No.	Output (Rated / Peak 10 sec.)	Tol.	R&N	Effi.		
EPS-45-3.3	3.3V, 8A / 9A	±3%	80mV	80%		
EPS-45-5□	5V, 8A / 9A	±2%	80mV	83%		
EPS-45-7.5	7.5V, 5.4A / 5.6A	±2%	100mV	85%		
EPS-45-12 🗌	12V, 3.75A / 4.2A	±2%	120mV	88%		
EPS-45-15 🗌	15V, 3A / 3.3A	±2%	150mV	89%		
EPS-45-24 🗌	24V, 1.9A / 2.1A	±1%	240mV	90%		
EPS-45-36 □	36V, 1.25A / 1.4A	±1%	280mV	90%		
EPS-45-48 🗆	48V, 1A / 1.1A	±1%	300mV	91%		
□= blank, -C; blank: PCB type, -C: Enclosed type						

■ 65W—Clas		E	PS-65		
Model No.	Output (Rated / Peak 10 sec.)	Tol.	R&N	Effi.	
EPS-65-3.3	3.3V, 11A / 12A	±3%	80mV	80%	
EPS-65-5□	5V, 11A / 12A	±2%	80mV	82%	
EPS-65-7.5□	7.5V, 8A / 8.8A	±2%	100mV	84%	
EPS-65-12□	12V, 5.42A / 6A	±2%	120mV	86%	
EPS-65-15□	15V, 4.34A / 4.8A	±2%	150mV	87%	
EPS-65-24□	24V, 2.71A / 3A	±1%	240mV	88%	
EPS-65-36□	36V, 1.81A / 2A	±1%	280mV	89%	
EPS-65-48□	48V, 1.36A / 1.5A	±1%	300mV	90%	
= blank, -C; blank: PCB type, -C: Enclosed type					

101.6x 50.8x 29

ŀ	120VV—C	lass 1 or 11		EI	3-120
	Model No.	Output (Convection/10CFM)	Tol.	R&N	Effi.
	EPS-120-12	12V, 7A / 10A	±2%	120mV	88.0%
	EPS-120-15	15V, 5.6A / 8A	±2%	120mV	88.5%
	EPS-120-24	24V, 3.5A / 5A	±1%	150mV	90.0%
	EPS-120-27	27V, 3.15A / 4.5A	±1%	150mV	90.0%
	EPS-120-48	48V, 1.75A / 2.5A	±1%	200mV	91.0%

EDC 120

Green Open Frame 75~200W Single Output Industrial Grade





■ Features

- Universal AC input / Full range
- Built-in active PFC function
- Class I or Class II installations
- No load power consumption <0.5W
- High efficiency up to 94%
- Protections: Short circuit / Overload / Over voltage / Over temperature

- Built-in 12V/0.5A auxiliary output (12V/0.3A for EPP-100/150)
- Standby 5V@1A with fan, @ 0.6A without fan (EPP-300)
- Built-in remote sense function (EPP-300)
- LED indicator for power on
- Operating altitude up to 5000 meters (EPP-200)
- 3 years warranty



Model No.		ELP-75	EPP-100	EPP-150	EPP-200		
Rated	Fan	NA	100W (20CFM)	150W (20CFM)	200W (10CFM)		
Power	Convection	75W		100W	140W		
AC input volta	age range	90~264VAC			80~264VAC		
DC adjustmen	ıt range	±10%	-2%~+5% rated out	put voltage	±5% rated output voltage		
Overload	Range	105%~150%	105%~145%		115%~150%		
protection	Туре	Hiccup mode, auto-recovery					
Over voltage	Range	110%~130%	115%~135% rated output voltage		110%~130%		
protection	Туре	Shut down o/p voltage, re-power on to recover					
Withstand vol	tage	I/P-O/P: 3kVAC, I/P-FG:1.5kVAC, O/P-FG: 0.5kVAC	I/P-O/P: 3kVAC, I/P-FG:2kVAC, O/P-FG: 0.5kVAC				
Working temp	erature	-30~+70°C (refer to output derating curve)					
Safety standa	rds	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved				
EMC standard	ls	BS EN/EN55011 (EPP-300) / EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020					
Connection		3+4P/3.96mm pitch, JST B3P / B6P-VH	JST B3P / B4P-VH		JST B3P / B6P-VH		
Dimension (L	xWxH)(mm)	PCB: 175x 60x 27	101.6x 50.8x 29				

■ 75W—Clas	ss I			ELP-75
Model No.	Output	Tol.	R&N	Effi.
ELP-75-3.3	3.3V, 15A	±3%	80mV	80%
ELP-75-5	5V, 15A	±2%	80mV	82%
ELP-75-12	12V, 6.25A	±2%	120mV	89%
ELP-75-15	15V, 5A	±2%	150mV	90%
ELP-75-24	24V, 3.15A	±1%	240mV	90%
ELP-75-36	36V, 2.1A	±1%	280mV	90%
ELP-75-48	48V, 1.6A	±1%	300mV	90%

■ 100W—Class I EPP-100						
Model No.	Output (Convection/20CFM)	Tol.	R&N	Effi.		
EPP-100-12	12V, 6.3A / 8.5A	±2%	120mV	91.0%		
EPP-100-15	15V, 5A / 6.67A	±2%	150mV	91.0%		
EPP-100-24	24V, 3.2A / 4.2A	±1%	240mV	92.0%		
EPP-100-27	27V, 2.8A / 3.71A	±1%	240mV	92.5%		
EPP-100-48	48V, 1.6A / 2.1A	±1%	300mV	92.5%		

	150W—Cla	EP	EPP-150		
	Model No.	Output (Convection/20CFM)	Tol.	R&N	Effi.
	EPP-150-12	12V, 8.4A / 12.5A	±2%	130mV	91.5%
	EPP-150-15	15V, 6.7A / 10.0A	±2%	150mV	92.0%
	EPP-150-24	24V, 4.2A / 6.25A	±1%	240mV	93.0%
	EPP-150-27	27V, 3.71A / 5.56A	±1%	240mV	92.0%
	EPP-150-48	48V, 2.1A / 3.125A	±1%	300mV	92.0%
200W_Class I or II EPP-20					P-200

ZUUVV—Cla	ISS I OF II		EP	P-200	
Model No.	Output (Convection/10CFM)	Tol.	R&N	Effi.	
EPP-200-12	12V, 11.7A / 16.7A	±2%	100mV	93%	
EPP-200-15	15V, 9.4A / 13.4A	±2%	100mV	93%	
EPP-200-24	24V, 5.9A / 8.4A	±1%	150mV	94%	
EPP-200-27	27V, 5.3A / 7.5A	±1%	150mV	94%	
EPP-200-48	48V, 3A / 4.2A	±1%	200mV	94%	



Green Open Frame 300~500W Single Output Industrial Grade MEAN WELL











EPP-500 (5"x3")

■ Features

- Universal AC input / Full range
- Built-in active PFC function
- Class I or Class II installations
- No load power consumption <0.5W
- High efficiency up to 94%
- Protections: Short circuit / Overload / Over voltage / Over temperature
- 12V/0.5A auxiliary output
- Standby @ 0.6A without fan
- P.G/P.F, remote sense function
- LED indicator for power on
- Operating altitude up to 5000 meters
- 3 years warranty



Model No.		EPP-300	EPP-400	EPP-500		
Rated	Fan	300W (20.5CFM)	400W (25CFM)	500W (25CFM)		
Power	Convection	200W 250W		320W		
AC input voltage range		90~264VAC	80~264VAC			
DC adjustmer	nt range	±5% rated output voltage, EAC TP TC 004				
Overload	Range	105%~135%	115%~135%	105%~135%		
protection	Туре	Hiccup mode, auto-recovery				
Over voltage	Range	115%~135% rated output voltage	110%~130%			
protection	Туре	Shut down o/p voltage, re-power on to recover				
Withstand vol	ltage	I/P-O/P: 3kVAC, I/P-FG:2kVAC, O/P-FG: 0.5kVAC	AC I/P-O/P: 3kVAC, I/P-FG:2kVAC, O/P-FG: 1.5kVAC			
Working temp	erature	-30~+70°C (refer to output derating curve)				
Safety standa	rds	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, CCC GB4943.1(EPP-400 only), EN60335-1(EPP-400/500 only) approved				
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020				
Connection		JST B5P-VH / Screw terminal				
Dimension (L	xWxH)(mm)	127x 76.2x 35 127x 76.2x 41				

■ 300W—Cla	ss I		EP	P-300
Model No.	Output (Convection/20.5CFM)	Tol.	R&N	Effi.
EPP-300-12	12V, 16.67A / 25.0A	±3%	120mV	90.0%
EPP-300-15	15V, 13.33A / 20.0A	±3%	120mV	90.0%
EPP-300-24	24V, 8.33A / 12.5A	±2%	150mV	92.5%
EPP-300-27	27V, 7.4A / 11.12A	±2%	200mV	93.0%
EPP-300-48	48V, 4.17A / 6.25A	±2%	250mV	93.0%

■ 400W—C	400W—Class I or II EPP-400						
Model No.	Output (Convection/25CFM)	Tol.	R&N	Effi.			
EPP-400-1	2 12V, 20.8A / 33.3A	±3%	120mV	91.5%			
EPP-400-1	5 15V, 16.7A / 26.7A	±3%	150mV	92%			
EPP-400-2	4 24V, 10.5A / 16.7A	±2%	200mV	93%			
EPP-400-2	7 27V, 9.3A / 14.9A	±1%	200mV	93.5%			
EPP-400-3	6 36V, 7A / 11.2A	±1%	250mV	93%			
EPP-400-4	8 48V, 5.3A / 8.4A	±1%	250mV	94%			

■ 500W—Clas	ss I or II		EF	P-500
Model No.	Output (Convection/25CFM)	Tol.	R&N	Effi.
EPP-500-12	12V, 26.7A / 41.6A	±3%	200mV	91%
EPP-500-15	15V, 21.3A / 33.3A	±3%	200mV	92%
EPP-500-18	18V, 17.8A / 27.8A	±3%	200mV	92.5%
EPP-500-24	24V, 13.4A / 20.8A	±2%	200mV	93%
EPP-500-27	27V, 11.9A / 18.5A	±2%	200mV	93.5%
EPP-500-36	36V, 8.9A / 13.9A	±1%	200mV	94%
EPP-500-48	48V, 6.7A / 10.4A	±1%	200mV	94%
EPP-500-54	54V, 5.93A / 9.26A	±1%	200mV	94%

Green Open Frame 1~20W Industrial Miniature PCB-Mount





■ Features

- Universal AC input / up to 305VAC
- No load power consumption < 0.075W (<0.1W for IRM-05~20)
- Miniature size, high power density
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Isolation Class II
- Comply with EN55032 class B without any additional components
- Fully isolated plastic case
- High operating temperature up to +85°C
- Withstand 5G vibration test
- Low cost, high reliability
- Pass LPS
- 3 years warranty

Model No.	J	RM-01-xS	IRN	/I-02-x S	IRM-03-x S]	IRM-05	IRM-10	IRM-15	IRM	l-20
AC input voltage r	ange 8	35~305VAC									
Overload protectio	n >	>110%			105%~260%	0	115%~260%	115%~190%		115	%~160%
Over voltage prote	ction 1	115%~135% r	ated ou	ıtput voltaç	je					-	
Withstand voltage	1	/P-O/P: 3kVA	C								
Working temperatu	ire -	30~+85°C					-30~+70°C (r	efer to output derati	ng curve)		
Safety standards								SMI CNS14336-1 ap 1601-1 for IRM-03	proved;		
EMC standards	E	BS EN/EN550	32 clas	s B, EN61	000-3-2,3, EN	V61000-4	-2,3,4,5,6,8,11	, EN55024, EAC TP	TC 020		
Dimension (LxWxH		PCB: 33.7x 2: SMD: 33.7x 2			PCB: 37x 2 SMD: 37x 2		45.7x 25.4x 2	21.5	52.4x 27.2	x 24	
1W					IRM-01	5	W				IRM-05
Model No.	Outpu	ıt	Tol.	R&N	Effi.	N	lodel No.	Output	Tol.	R&N	Effi.
IRM-01-3.3 □	3.3V, 0~3		2.5%	150mV	66%	IR	M-05-3.3	3.3V, 0~1.25A	±2.5%	200mV	68%
IRM-01-5	5V, 0~2		2.5%	150mV	70%	IR	M-05-5	5V, 0~1A	±2.5%	200mV	71%
IRM-01-9	9V, 0~1		2.5%	150mV	72%	IR	M-05-12	12V, 0~0.42A	±2.5%	200mV	75%
IRM-01-12□	12V, 0~8		2.5%	150mV	74%		M-05-15	15V, 0~0.33A	±2.5%	200mV	75%
IRM-01-15	15V, 0~6		2.5%	200mV	75%	IR	M-05-24	24V, 0~0.23A	±2.5%	200mV	77%
IRM-01-24	24V, 0~4		2.5%	200mV	77%	1	0W				IRM-1
= Blank, S ; I			/le, S: 8	SMD type		N	lodel No.	Output	Tol.	R&N	Effi.
1 0 M					IDM 00		M-10-3.3	3.3V, 0~2.5A	±2.5%	200mV	74%
2W					IRM-02		M-10-5	5V, 0~2A	±2.5%	200mV	77%
Model No.	Outpu	ıt	Tol.	R&N	Effi.		M-10-12	12V, 0~0.85A	±2.5%	200mV	82%
IRM-02-3.3 □	3.3V, 0~6		:2.5%	150mV	66%	IR	M-10-15	15V, 0~0.67A	±2.5%	200mV	82%
IRM-02-5	5V, 0~4		2.5%	150mV	70%	IR	M-10-24	24V, 0~0.42A	±2.5%	200mV	82%
IRM-02-9 □	9V, 0~2		2.5%	150mV	72%	1	5W				IRM-1
IRM-02-12	12V, 0~1		2.5%	150mV	74%	M	lodel No.	Output	Tol.	R&N	Effi.
IRM-02-15	15V, 0~1		2.5%	200mV	75%		M-15-3.3	3.3V, 0~3.5A	±2.5%	200mV	74%
IRM-02-24 □	24V, 0~8		2.5%	200mV	77%		M-15-5.3 M-15-5	5V, 0~3A	±2.5%	200mV	74%
= Blank, S;	Blank: PCB	mounting sty	yle, S: S	SMD type			M-15-12	12V, 0~1.25A	±2.5%	200mV	82%
3W					IRM-03		M-15-15	15V, 0~1A	±2.5%	200mV	82%
Model No.	Outpu	ıt	Tol.	R&N	Effi.	IR	M-15-24	24V, 0~0.63A	±2.5%	200mV	83%
IRM-03-3.3 □	3.3V, 0~9		2.5%	100mV	68%	2	nw.				IRM-2
IRM-03-5	5V, 0~6		2.5%	100mV	72%		U # W				IIXIVI-Z
IRM-03-9 □	9V, 0~3		2.5%	100mV	77%	IV	lodel No.	Output	Tol.	R&N	Effi.
IRM-03-12 □	12V, 0~2		2.5%	150mV	78%	IR	M-20-3.3	3.3V, 0~4.5A	±2.5%	200mV	76%
IRM-03-15	15V, 0~2		2.5%	200mV	78%		M-20-5	5V, 0~4A	±2.5%	200mV	79%
IRM-03-24	24V, 0~1:		2.5%	240mV	80%		M-20-12	12V, 0~1.8A	±2.5%	200mV	84%
00	, 0 11		0 ,0	- 10111V	0070	IR	M-20-15	15V, 0~1.4A	±2.5%	200mV	84%

Green Open Frame 30~90W Industrial Miniature PCB-Mount





■ Features

- Universal AC input up to 305VAC
- No load power consumption < 0.1W (<0.21W for IRM-90)
- Miniature size, high power density
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Isolation Class II
- Fully isolated plastic case

- Comply with EN55032 class B without any additional components
- High operating temperature up to +80°C
- Withstand 5G vibration test
- Low cost, high reliability
- Pass LPS (except for IRM-45/60 5V and IRM-90)
- Over voltage category III
- 3 years warranty



Model No.	IRM-30-xST	IRM-45-xST	IRM-60-x ST	IRM-90-x ST	
AC input voltage range	85~305VAC			80~305VAC	
AC inrush current (max.)	Cold start, 25A at 115VAC, 45A at 230VAC	Cold start, 30A at 11	5VAC, 60A at 230	VAC	
Overload protection	105%~160%	115%~160%			
Over voltage protection	105%~135%				
Setup, rise, hold up time	1000ms, 30ms, 40ms at 230VAC	1000ms, 30ms, 50ms	at 230VAC	1000ms, 30ms, 30ms at 230VAC	
Leakage current	<0.25mA at 240VAC	<0.25mA at 240VAC			
Withstand voltage	I/P-O/P: 4kVAC			I/P-O/P: 4kVAC	
Working temperature	-30~+70°C (refer to output derating curve)			-30~+80°C	
Vibration	10~500Hz, 5G 10min./1 cycle, period for 60	min. each along X, Y,	Z axes	,	
Safety standards	UL62368-1, TUV BS EN/EN62368-1, EAC BSMI CNS14336-1 (except for IRM-90) ap	OUR MANY MANAGEMENT STREET, ST	5-1 approved (IRM	M-90 by request);	
EMC standards	BS EN/EN55032 class B, EN61000-3-2,3, E	N61000-4-2,3,4,5,6,8,	11, EAC TP TC 02	0	
Connection	4 industrial pins				
Dimension (LxWxH)(mm) PCB mounting: 69.5x 39x 24; Screw I/O: 91x 39.5x 28.5		PCB mounting: 87x 5 Screw I/O: 109x 52x			

30W				IRM-30
Model No.	Output	Tol.	R&N	Effi.
IRM-30-5□	5V, 0~6A	±2.5%	120mV	83%
IRM-30-12□	12V, 0~2.5A	±2.5%	150mV	88%
IRM-30-15□	15V, 0~2A	±2.5%	200mV	88%
IRM-30-24□	24V, 0~1.3A	±2.5%	240mV	88.5%
IRM-30-48□	48V, 0~0.63A	±2.5%	300mV	90%
□ = Blank, ST ; E	Blank: PCB mounting	style, ST: S	crew termin	nal style

45W				IRM-45
Model No.	Output	Tol.	R&N	Effi.
IRM-45-5□	5V, 0~8A	±2.5%	80mV	83.5%
IRM-45-12□	12V, 0~3.8A	±2.5%	150mV	87.5%
IRM-45-15□	15V, 0~3A	±2.5%	180mV	88.5%
IRM-45-24□	24V, 0~1.9A	±2.5%	200mV	89.5%
IRM-45-48□	48V, 0~0.94A	±2.5%	300mV	90.5%
□ = Blank ST	Blank: PCB mounting	style ST: S	crew termi	nal style

■ 60W				IRM-60
Model No.	Output	Tol.	R&N	Effi.
IRM-60-5□	5V, 0~10A	±2.5%	80mV	84%
IRM-60-12□	12V, 0~5A	±2.5%	120mV	87.5%
IRM-60-15□	15V, 0~4A	±2.5%	120mV	89%
IRM-60-24□	24V, 0~2.5A	±2.5%	150mV	90%
IRM-60-48□	48V, 0~1.25A	±2.5%	240mV	91%
□ = Blank, ST : I	Blank: PCB mounting	style, ST: S	crew termi	inal style

J	9000			NEW	IKIVI-90
	Model No.	Output	Tol.	R&N	Effi.
	IRM-90-12□	12V, 0~6.7A	±2%	120mV	92%
	IRM-90-15□	15V, 0~6.23A	±2%	150mV	92.5%
	IRM-90-24□	24V, 0~3.75A	±2%	200mV	93%
	IRM-90-48□	48V, 0~1.88A	±2%	240mV	93%
	□ = Blank, ST ; I	Blank: PCB mounting	style, ST: S	Screw termin	nal style



0014/

IDM OO

Green Open Frame 5~30W Medical Miniature PCB-Mount







MPM-05/10









■ Features

5W

- Universal AC input / Full range
- Medical safety (2xMOPP)
- Suitable for BF application with appropriate system consideration
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Extremely low leakage current
- No load power consumption <0.075W

- EMI class B for class II configuration
- -40~+85°C wide range working temperature
- Withstand 5G vibration test
- Miniature size, high power density
- Fully isolated plastic case
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



(MTRH-10XXV UIIIY)							
Model No.	MPM-05	MPM-10	MPM-15	MPM-20	MPM-30-x ST		
AC input voltage range	80~264VAC						
Leakage current	<80µA at 264V	30µA at 264VAC					
AC inrush current (max.)	Cold start, 25A	old start, 25A at 115VAC, 45A at 230VAC					
Overload protection	105%~160% hi	ccup mode, auto	-recovery				
Over voltage protection	105%~135% sh	ut down o/p vol	tage				
Setup, rise, hole up time	1000ms, 30ms,	40ms at 230VA	С		500ms, 30ms, 40ms at 230VAC		
Withstand voltage	I/P-O/P: 4kVAC						
Working temperature	-40~+85°C	-30~+85°C	-40~+85°C	-35~+85°C	-40~+85°C (refer to output derating curve)		
Safety standards		, EN60601-1, E. proved for MPM-	The same of the sa	JL ANSI/AAMI ES	S60601, CAN/CSA-C22 3rd edition;		
EMC standards	BS EN/EN5501	1 class B, EN61	000-3-2,3, EN61	000-4-2,3,4,5,6,	8,11, EN60601-1-2		
Connection	4 pins						
Dimension (LxWxH)(mm)	45.7x 25.4x 21	45.7x 25.4x 21.5					

MPM-05

Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.
MPM-05-3.3	3.3V, 1.25A / 1.38A	±2.5%	100mV	74%
MPM-05-5	5V, 1.00A / 1.10A	±2.5%	100mV	78%
MPM-05-12	12V, 0.42A / 0.46A	±2.5%	150mV	80%
MPM-05-15	15V, 0.33A / 0.36A	±2.5%	150mV	81%
MPM-05-24	24V, 0.23A / 0.25A	±2.5%	180mV	82%
■ 10W			M	PM-10
Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.
MPM-10-3.3	3.3V, 2.50A / 2.75A	±2.5%	120mV	78%
MPM-10-5	5V, 2.00A / 2.20A	±2.5%	100mV	81%
MPM-10-12	12V, 0.85A / 0.94A	±2.5%	180mV	83%
MPM-10-15	15V, 0.67A / 0.74A	±2.5%	180mV	83%
MPM-10-24	24V, 0.42A / 0.46A	±2.5%	200mV	84%
■ 15W			MI	PM-15
Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.
MPM-15-3.3	3.3V, 3.50A / 3.85A	±1%	150mV	83.5%
MPM-15-5	5V, 3.00A / 3.30A	±1%	150mV	85.5%
MPM-15-12	12V, 1.25A / 1.38A	±1%	150mV	86.5%
MPM-15-15	15V, 1.00A / 1.10A	±1%	180mV	87.0%
MPM-15-24	24V, 0.63A / 0.69A	±1%	180mV	86.5%

20W	20W MPM-20					
Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.		
MPM-20-3.3	3.3V, 4.50A / 4.95A	±2%	150mV	81%		
MPM-20-5	5V, 4.00A / 4.40A	±2%	150mV	85%		
MPM-20-12	12V, 1.80A / 1.98A	±2%	150mV	85.5%		
MPM-20-15	15V, 1.40A / 1.54A	±2%	180mV	87%		
MPM-20-24	24V, 0.90A / 0.99A	±2%	180mV	87%		

30W			М	PM-30	
Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.	
MPM-30-3.3□	3.3V, 6.00A / 7.8A	±2%	80mV	82.5%	
MPM-30-5□	5V, 6.00A / 6.9A	±2%	80mV	86.5%	
MPM-30-12□	12V, 2.50A / 2.9A	±2%	120mV	90%	
MPM-30-15□	15V, 2.00A / 2.3A	±2%	120mV	89%	
MPM-30-24□	24V, 1.30A / 1.5A	±2%	200mV	90%	
MPM-30-48□	48V, 0.63A / 0.73A	±2%	200mV	91%	
= Blank, ST; Blank: PCB mounting, ST: Screw terminal style					



Green Open Frame 45~90W Medical Miniature PCB-Mount











MPM-45/65/90

MPM-45/65/90-xST

■ Features

- Universal AC input / Full range
- Medical safety (2xMOPP)
- Suitable for BF application with appropriate system consideration
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Extremely low leakage current
- No load power consumption <0.1W
- Withstand 5G vibration test

- EMI class B for class II configuration
- -30~+80°C wide range working temperature
- 110% peak power (10 sec.)
- Miniature size, high power density
- Fully isolated plastic case
- 3 years warranty



Model No.	MPM-45	MPM-65	MPM-90		
AC input voltage range	80~264VAC				
Leakage current	<100µA at 264VAC	<100µA at 264VAC			
AC inrush current (max.)	Cold start, 30A at 115VAC, 60A at 230VAC	AC Cold start, 30A at 115VAC, 65A at 230VAC			
Overload protection	115%~135% hiccup mode, auto-recovery 115%~160% hiccup mode, auto-reco				
Over voltage protection	105%~135% shut down o/p voltage				
Setup, rise, hole up time	1000ms, 30ms at 230VAC				
Withstand voltage	I/P-O/P: 4kVAC				
Working temperature	-30~+80°C (refer to output derating cur	ve)			
Safety standards	BS EN60601-1, EN60601-1,UL ANSI/A/ EAC TP TC 004, Design refer to EN603	AMI ES60601-1(3.1 version), CAN/CSA- 335-1(by request)	C22 3 Edition approved;		
EMC standards	BS EN/EN55011 class B, EN61000-3-2,3	, EN61000-4-2,3,4,5,6,8,11, EN60601-1-2			
Connection	4 pins				
Dimension (LxWxH)(mm) PCB mounting: 87x 52x 29.5; Screw I/O: 109x 52x 33.5					

■ 45W			M	PM-45	
Model No.	Output (Rated/Peak10 sec.)	Tol.	R&N	Effi.	
MPM-45-5□	5V, 8.00A / 8.8A	±2%	80mV	88.0%	
MPM-45-12□	12V, 3.75A / 4.13A	±2%	120mV	91.5%	
MPM-45-15□	15V, 3.00A / 3.30A	±2%	120mV	92.5%	
MPM-45-24□	24V, 1.88A / 2.10A	±2%	200mV	92.5%	
MPM-45-48□	48V, 0.94A / 1.05A	±2%	240mV	92.0%	
Blank, ST; Blank: PCB mounting, ST: Screw terminal style					

■ 65W			M	PM-65	
Model No.	Output (Rated/Peak10 sec.)	Tol.	R&N	Effi.	
MPM-65-5□	5V, 10A / 11A	±2%	80mV	86.5%	
MPM-65-12□	12V, 5.42A / 5.96A	±2%	120mV	92.5%	
□ = Blank, ST; Blank: PCB mounting, ST: Screw terminal style					

Model No.	Output (Rated/Peak10 sec.)	Tol.	R&N	Effi.		
MPM-65-15□	15V, 4.33A / 4.77A	±2%	120mV	92.5%		
MPM-65-24□	24V, 2.71A / 2.98A	±2%	200mV	93.0%		
MPM-65-48□	48V, 1.36A / 1.49A	±2%	240mV	92.0%		
□ = Blank, ST; Blank: PCB mounting, ST: Screw terminal style						

90W	■ 90W MPM-90					
Model No.	Output (Rated/Peak10 sec.)	Tol.	R&N	Effi.		
MPM-90-12□	12V, 6.7A / 7.37A	±2%	120mV	92.0%		
MPM-90-15□	15V, 5.67A / 6.23A	±2%	150mV	92.5%		
MPM-90-24□	24V, 3.75A / 4.13A	±2%	200mV	93.0%		
MPM-90-48□	48V, 1.88A / 2.07A	±2%	240mV	93.0%		
	□ = Blank, ST; Blank: PCB mounting, ST: Screw terminal style					



Green Open Frame 5~30W Medical Miniature On Board Type MEAN WELL













■ Features

- Universal AC input / Full range
- Medical safety (2xMOPP)
- Suitable for BF application with appropriate system consideration
- Protections: Short circuit / Overload / Over voltage / Over temp.
- Extremely low leakage current
- No load power consumption <0.075W

- EMI class B for Class II configuration
- -40~+85°C wide range working temperature
- Miniature size, high power density
- No minimum load required
- 3 years warranty



(MFM-15/20 ONly)				13/20 Offiy)			
Model No.	MFM-05	MFM-10	MFM-15	MFM-20	MFM-30		
AC input voltage range	80~264VAC		J				
Leakage current	<80µA at 264VAC	0μA at 264VAC					
AC inrush current (max.)	AC inrush current (max.) Cold start, 25A at 115VAC, 45A at 230VAC						
Overload protection	erload protection 105%~160% hiccup mode, auto-recovery 115%~165%				115%~165%		
Over voltage protection	105%~135% shut do	wn o/p voltage		105%~135%			
Setup, rise, hole up time	1000ms, 30ms, 40ms	at 230VAC			500ms, 30ms, 40ms at 230VAC		
Withstand voltage	I/P-O/P: 4kVAC						
Working temperature	-40~+85°C	-30~+85°C	-35~+85°C		-40~+85°C (refer to output derating curve)		
Safety standards	BS EN 60601-1, EN606	01-1, EAC TP TC 004, UL	ANSI/AAMI ES606	01, CAN/CSA-C22 3	Brd edition; BS EN/EN 60335-1(MFM-15/20) approved		
EMC standards	BS EN/EN55011 clas	s B, EN61000-3-2,3, I	EN61000-4-2,3,4	5,6,8,11, EN6060	01-1-2		
Connection	a 4 pins						
Dimension (LxWxH)(mm)	42x 22.3x 20.5		49x 23.8x 23		65.5x 35x 23		

■ 5W	MF	M-05		
Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.
MFM-05-3.3	3.3V, 1.25A / 1.38A	±2.5%	100mV	74%
MFM-05-5	5V, 1.00A / 1.10A	±2.5%	100mV	78%
MFM-05-12	12V, 0.42A / 0.46A	±2.5%	150mV	80%
MFM-05-15	15V, 0.33A / 0.36A	±2.5%	150mV	81%
MFM-05-24	24V, 0.23A / 0.25A	±2.5%	180mV	82%

■ 10W MFM-10						
Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.		
MFM-10-3.3	3.3V, 2.50A / 2.75A	±2.5%	120mV	78%		
MFM-10-5	5V, 2.00A / 2.20A	±2.5%	100mV	81%		
MFM-10-12	12V, 0.85A / 0.94A	±2.5%	180mV	83%		
MFM-10-15	15V, 0.67A / 0.74A	±2.5%	180mV	83%		
MFM-10-24	24V, 0.42A / 0.46A	±2.5%	200mV	84%		

■ 15W MFM-1					
Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.	
MFM-15-3.3	3.3V, 3.50A / 3.85A	±2%	150mV	83.5%	
MFM-15-5	5V, 3.00A / 3.30A	±2%	150mV	85.5%	
MFM-15-12	12V, 1.25A / 1.38A	±2%	150mV	86.5%	
MFM-15-15	15V, 1.00A / 1.10A	±2%	180mV	87.0%	
MFM-15-24	24V, 0.63A / 0.69A	±2%	180mV	86.5%	

20W			M	FM-20
Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.
MFM-20-3.3	3.3V, 4.50A / 4.95A	±2%	150mV	81%
MFM-20-5	5V, 4.00A / 4.40A	±2%	150mV	85%
MFM-20-12	12V, 1.80A / 1.98A	±2%	150mV	85.5%
MFM-20-15	15V, 1.40A / 1.54A	±2%	180mV	87%
MFM-20-24	24V, 0.90A / 0.99A	±2%	180mV	87%

30W			M	FM-30
Model No.	Output / Peak(10 sec.)	Tol.	R&N	Effi.
MFM-30-3.3	3.3V, 6.00A / 7.8A	±2%	80mV	82.5%
MFM-30-5	5V, 6.00A / 6.9A	±2%	80mV	86.5%
MFM-30-12	12V, 2.50A / 2.9A	±2%	120mV	90%
MFM-30-15	15V, 2.00A / 2.3A	±2%	120mV	89%
MFM-30-24	24V, 1.30A / 1.5A	±2%	200mV	90%
MFM-30-48	48V, 0.63A / 0.73A	±2%	200mV	91%



Green Open Frame 30~120W Single Output Medical Grade MEAN WELL





■ Features

- Universal AC input / Full range
- Class I or Class II configuration
- Medical safety approved (2x MOPP)
- Suitable for BF application with appropriate system consideration
- Extremely low leakage current
- No load power consumption <0.1W (<0.3W for RPS-120S)
- Protections: Short circuit / Overload / Over voltage
- LED indicator for power on
- 3 years warranty



	-			(NF3-1203)		
Model No.		RPS-30	RPS-45	RPS-65	RPS-120S	
Dated Dames	Fan	NA		1		
Rated Power	Convection	30W	45W	65W	120W	
AC input voltage range 80~264VAC						
Leakage curr	eakage current <90µA <100µA		<150µA			
DC adjustmen	t range	±10% rated output voltage	,		±5% rated output voltage	
Overload prot	otection 115%~150% hiccup mode, auto-recovery					
Over voltage p	protection	115%~135% shut down o/p vo	Itage, re-power on to recover		110%~130%	
Withstand vol	tage	I/P-O/P: 4kVAC, I/P-FG:2kVA	C, O/P-FG: 1.5kVAC			
Norking temp	erature	-30~+70°C			-30~+85°C	
Safety standa	rds	ANSI/AAMI ES60601-1, TUV I	BS EN/EN60601-1, EAC TP TC	004 approved		
EMC standard	s	BS EN/EN55011 class B, EN6	1000-3-2,-3, EN61000-4,2,3,4,5	5,6,8,11, EN60601-1-1-2, EAC	TP TC 020	
Connection		JST B3P / B2P-VH	JST B3P / B4P-VH			
Dimension (Lx	(WxH)(mm)	76.2x 50.8x 24	76.2x 50.8x 28			

■ 30W—Clas	ss II			RPS-30
Model No.	Output (Rated / Peak)	Tol.	R&N	Effi.
RPS-30-3.3	3.3V, 6A / 6.6A	±2%	80mV	80%
RPS-30-5	5V, 6A / 6.6A	±2%	80mV	82%
RPS-30-7.5	7.5V, 4A / 4.4A	±2%	80mV	84%
RPS-30-12	12V, 2.5A / 2.75A	±2%	100mV	88%
RPS-30-15	15V, 2A / 2.2A	±2%	100mV	89%
RPS-30-24	24V, 1.25A / 1.375A	±1%	150mV	89.5%
RPS-30-48	48V, 0.625A / 0.687A	±1%	150mV	92%

65W—Clas	ss II			RPS-65
Model No.	Output (Rated / Peak)	Tol.	R&N	Effi.
RPS-65-3.3	3.3V, 10A / 11A	±2%	80mV	80%
RPS-65-5	5V, 10A / 11A	±2%	80mV	84%
RPS-65-7.5	7.5V, 8A / 8.8A	±2%	80mV	85%
RPS-65-12	12V, 5.42A / 5.96A	±2%	120mV	88%
RPS-65-15	15V, 4.34A / 4.77A	±1%	120mV	89%
RPS-65-24	24V, 2.71A / 2.98A	±1%	120mV	90%
RPS-65-48	48V, 1.36A / 1.49A	±1%	150mV	91%

■ 45W—Clas	45W—Class II					
Model No.	Output (Rated / Peak)	Tol.	R&N	Effi.		
RPS-45-3.3	3.3V, 8A / 8.8A	±2%	60mV	80.5%		
RPS-45-5	5V, 8A / 8.8A	±2%	60mV	83%		
RPS-45-7.5	7.5V, 5.4A / 5.95A	±2%	80mV	85%		
RPS-45-12	12V, 3.8A / 4.18A	±2%	100mV	88%		
RPS-45-15	15V, 3A / 3.3A	±2%	100mV	89%		
RPS-45-24	24V, 1.9A / 2.1A	±1%	120mV	90%		
RPS-45-48	48V, 0.94A / 1.03A	±1%	120mV	91%		

■ 120W—Class I or II			RP	S-120S
Model No.	Output (Rated / Peak)	Tol.	R&N	Effi.
RPS-120S-12	12V, 9.5A / 11.8A	±2%	100mV	91%
RPS-120S-15	15V, 7.6A / 9.5A	±2%	120mV	92%
RPS-120S-24	24V, 5A / 6.25A	±1%	150mV	93%
RPS-120S-27	27V, 4.44A / 5.55A	±1%	150mV	94%
RPS-120S-48	48V, 2.5A / 3.125A	±1%	200mV	93.5%



Green Open Frame 60~200W 1~3 Output Medical Grade





■ Features

- Universal AC input / Full range
- Class I or Class II configuration
- Medical safety approved (2x MOPP)
- Suitable for BF application with appropriate system consideration
- Extremely low leakage current
- High efficiency up to 95%
- Built-in 12V/0.5A fan supply (RPS-120/200)

- LED indicator for power on (except for RPS/D/T-60)
- No load power consumption <0.3W for 120W model <0.5W for 200W model
 - <0.75W for 60W model
- Protections: Short circuit / Overload / Over voltage / Over temperature
- 3 years warranty



Model No.		RPS/D/T-60	RPS-120-x	RPS-200-x	
D.4. J D	Fan	NA	120W (10CFM)	200W (10CFM)	
Rated Power	Convection	60W	84W	140W	
AC input voltage range		90~264VAC	80~264VAC		
Leakage curr	ent	<130µA	<150µA <130µA		
DC adjustmen	t range	-5%~+10%	±5% rated output voltage		
Overload prot	ection	115%~150% hiccup mode, auto-rec	ecovery		
Over voltage	protection	115%~135%	110%~130% shut down o/p voltage, re-power	on to recover	
Withstand vol	tage	I/P-O/P: 4kVAC, I/P-FG:2kVAC, O/F	P-FG: 1.5kVAC		
Working temp	erature	-20~+70°C(RPS), -20~+65°C(RPD/T)	-30~+70°C		
Safety standa	rds	ANSI/AAMI ES60601-1, TUV BS EN	N/EN60601-1, EAC TP TC 004 approved; UL/EN	62368-1 for RPS/D/T-60 only	
EMC standard	ls	BS EN/EN55032 (RPS/D/T-60), EN550	011 class B, EN61000-3-2,-3, EN61000-4,2,3,4,5,6,8,11, EN60601-1-1-2, EAC TP TC 02		
Connection		JST B3P / B4P-VH (RPS-60) JST B3P / B6P-VH (RPD/T-60)	JST B3P / B4P-VH	JST B3P / B6P-VH	
Dimension (LxWxH)(mm) 101.6x 50.8x 29		101.6x 50.8x 29	PCB: 101.6x 50.8x 29 ; Case: 103.4x 62x 40		

■ 60W:Single	Output—Class I			RPS-60
Model No.	Output (Rated / Peak)	Tol.	R&N	Effi.
RPS-60-3.3	3.3V, 10A / 11A	±2%	60mV	74%
RPS-60-5	5V, 10A / 11A	±2%	60mV	79%
RPS-60-12	12V, 5A / 5.5A	±2%	120mV	84%
RPS-60-15	15V, 4A / 4.4A	±2%	120mV	85%
RPS-60-24	24V, 2.5A / 2.75A	±1%	120mV	87%
RPS-60-48	48V, 1.25A / 1.375A	±1%	120mV	86%

■ 60W:Dual	Output—Cla	iss I		R	PD-60
Model No.	Output	Tol.	R&N	Effi.	Max.
RPD-60A	5V, 0.5~5.5A 12V, 0.1~2.2A	+3%,-2% +6%	80mV 80mV	78%	54W
RPD-60B	5V, 0.5~3.85A 24V, 0.1~1.65A	+3%,-2% +8%,-4%	80mV 100mV	82%	59W

■ 60W:Triple Output—Class I					PT-60
Model No.	Output	Tol.	R&N	Effi.	Max.
RPT-60A	5V, 0.5~4.4A	+3%,-2%	80mV	77%	51W
	12V, 0.1~2.2A	±6%	80mV		
	-5V, 0.1~0.55A	+9%,-8%	80mV		
RPT-60B	5V, 0.5~4.4A	+3%,-2%	80mV	78%	55W
	12V, 0.1~2.2A	±6%	80mV		
	-12V, 0.1~0.55A	+10%,-6%	100mV		
RPT-60C	5V, 0.5~4.4A	+3%,-2%	80mV	79%	55W
	15V, 0.1~0.65A	±6%	100mV		
	-15V, 0.1~0.55A	±8%	150mV		

Model No.	Output	Tol.	R&N	Effi.	Max.
RPT-60A	5V, 0.5~4.4A	+3%,-2%	80mV	77%	51W
RPT-60D	5V, 0.5~3.85A	+3%,-2%	80mV	79%	52W
	24V, 0.1~1.1A	±6%	150mV		
	12V, 0.1~0.55A	±8%	80mV		
RPT-6003	3.3V, 0.5~5.5A	+3%,-2%	80mV	75%	44W
	5V, 0.3~3.3A	±8%	80mV		
	12V, 0.1~0.77A	+10%,-6%	80mV		

■ 120W—Clas	s I or II		RF	PS-120	
Model No. O	utput (Convection/10CFM)	Tol.	R&N	Effi.	
RPS-120-12 □	12V, 7A / 10A	±2%	100mV	89%	
RPS-120-15 □	15V, 5.6A / 8A	±2%	120mV	89%	
RPS-120-24 □	24V, 3.5A / 5A	±1%	150mV	90%	
RPS-120-27 □	27V, 3.15A / 4.5A	±1%	150mV	90%	
RPS-120-48 □	48V, 1.75A / 2.5A	±1%	150mV	91%	
□= blank, -C; b	lank: PCB type, -C: Enclos	ed type			

■ 200W—Cla	ass I or II		RF	PS-200
Model No.	Output (Convection/10CFM)	Tol.	R&N	Effi.
RPS-200-12 □	12V, 11.7A / 16.7A	±2%	100mV	93%
RPS-200-15 🗆	15V, 9.4A / 13.4A	±2%	100mV	93.5%
RPS-200-24 □	24V, 5.9A / 8.4A	±1%	120mV	94%
RPS-200-27 □	27V, 5.3A / 7.5A	±1%	120mV	94%
RPS-200-48 □	48V, 3A / 4.2A	±1%	120mV	95%
□= blank, -C	; blank: PCB type, -C: Enclo	sed type		



Green Open Frame 75~160W 1~3 Output Medical Grade MEAN WELL











Features

- Universal AC input / Full range
- Medical safety approved (2xMOPP)
- Suitable for BF application with appropriate system consideration Built-in remote sense function (RPS-160 5~15V)
- Built-in active PFC function (RPS/T-160)
- Protections: Short circuit / Overload / Over voltage / Over temperature (RPS/T-160)
- Extremely low leakage current
- Built-in P.G and P.F signal output (RPS/T-160)
- No load power consumption <0.75W (RPS-75&RPS/T-160 G model)
- Standby 5V@0.8A (RPS/T-160 G model)
- LED indicator for power on
- 3 years warranty



Model No.		RPS/D/T-75	RPS□-160	RPT □ -160 ○		
Rated Fan		100W (23.5CFM)	160W (20.5CFM)	RPT(G)-160:145W (20.5CFM), RPT(G)-160-C: 142W (20.5CFM)		
Power	Convection	75W	110W	RPT(G)-160: 99W, RPT(G)-160-C: 94W		
AC input	voltage range	90~264VAC				
Leakage current		<150µA	<160µA			
DC adjustment range		CH1: -5%~+10% rated output voltage	±10%	0~+10%		
Overload protection		140%~180% hiccup mode, auto-recovery	105%~135% hiccup mode, auto-recovery			
Over volt	age protection	CH1: 110%~135% shut down o/p voltage, re	-power on to recover			
Withstan	d voltage	I/P-O/P: 4kVAC, I/P-FG:2kVAC, O/P-FG: 1.5	kVAC			
Working	temperature	-20~+70°C (refer to output derating curve)				
Safety st	andards	ANSI/AAMI ES60601-1, TUV BS EN/EN60601-1, EAC TP TC 004 approved				
EMC standards		BS EN/EN55011 class B, EN61000-3-2,-3; EN60601-1-2, EAC TP TC 020				
Connection		JST B3P / B8P-VH				
Dimension (LxWxH)(mm)		127x 76.2x 31	127x 76.2x 34.6			

■ 75W:Sing	gle Output—Class I			RPS-75
Model No.	Output (Rated / 23.5CFM)	Tol.	R&N	Effi.
RPS-75-3.3	3.3V, 15A / 20A	±2%	60mV	73%
RPS-75-5	5V, 14A / 18.7A	±2%	60mV	78%
RPS-75-12	12V, 6.3A / 8.3A	±1%	100mV	82%
RPS-75-15	15V, 5A / 6.7A	±1%	100mV	83%
RPS-75-24	24V, 3.2A / 4.2A	±1%	150mV	85%
RPS-75-36	36V, 2.1A / 2.8A	±1%	150mV	86%
RPS-75-48	48V 16A/21A	+1%	150mV	86%

ļ	75W:Dual	Output—Clas	s I		R	PD-75
	Model No.	Output	Tol.	R&N	Effi.	Max.
	RPD-75A	5V, 1.0~9.5A 12V, 0.3~4.0A	±2%	80mV	77%	96W
	RPD-75B	5V, 1.0~6.8A 24V, 0.2~2.7A	±2% ±6%	120mV 120mV	79%	99W


■ 75W:Trip	le Output—Cla	ass I		R	PT-75
Model No. RPT-75A	Output 5V, 0.6~8.0A 12V, 0.2~4.0A	Tol. ±2% ±6%	R&N 80mV 120mV	Effi. 76%	Max. 93W
RPT-75B	-5V, 0.1~1.0A 5V, 0.6~8.0A 12V, 0.2~4.0A -12V, 0.1~1.0A	±5% ±2% ±6% ±5%	80mV 80mV 120mV 80mV	77%	100W
RPT-75C	5V, 0.6~8.0A 15V, 0.1~3.0A -15V, 0.1~1.0A	±2% ±8% ±5%	80mV 120mV 80mV	77%	100W
RPT-75D	5V, 0.6~7.0A 24V, 0.1~2.0A 12V, 0.1~1.0A	±2% ±8% ±8%	80mV 200mV 120mV	79%	95W
RPT-7503	3.3V, 0.7~7.0A 5V, 0.0~8.0A 12V, 0.0~1.5A	±4% ±6% +10%,-6%	80mV 120mV 120mV	74%	81W

■ 160W:Sing	I 160W: Single Output—Class I RPS-160				
Model No.	Output (Convection / 20.5CFM)	Tol.	R&N	Effi.	
RPS□-160-5	5V, 20A / 30A	±4%	80mV	86%	
RPS□-160-12	12V, 9.1A / 12.9A	±3%	80mV	87%	
RPS□-160-15	15V, 7.3A / 10.3A	±3%	120mV	87%	
RPS□-160-24	24V, 4.6A / 6.5A	±2%	120mV	87%	
	48V, 2.3A / 3.25A blank: basic function, /sb & no load power consumption	±2%	150mV V	88%	

■ 160W:Triple	e Output—Cl	lass I		R	PT-160
Model No.	Output	Tol.	R&N	Effi.	Max.
RPT□-160A○	5V, 0.6~14A	±2%	60mV	84%	145W
	12V, 0.2~5.5A	±5%	80mV		
	-5V, 0.1~1.0A	-5%,+7%	120mV		
RPT□-160B○	5V, 0.6~14A	±2%	60mV	84%	146W
	12V, 0.2~5.0A	±5%	100mV		
	-12V, 0.1~1.0A	-4%,+5%	100mV		
RPT□-160C○	5V, 0.6~14A	±2%	60mV	83%	143W
	15V, 0.1~3.6A	±4%	80mV		
	-15V, 0.1~1.0A	±8%	100mV		
RPT□-160D○	5V, 0.3~11A	±2%	80mV	83%	148W
	12V, 0.2~5.0A	±5%	100mV		
	24V, 0.15~1.2A	-5%,+7%	120mV		
□ = blank, G; blank: basic function, G: with 5Vsb/0.8A & no load power consumption< 0.75W □ = blank, -C; blank: PCB type (standard); -C: Enclosed type (optional)					

Green Open Frame 300~400W Single Output Medical Grade MEAN WELL



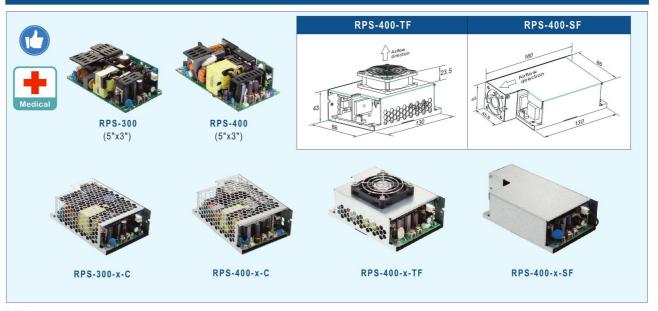


■ Features

- Universal AC input / Full range
- Built-in active PFC function
- Medical safety approved (2xMOPP)
- Suitable for BF application with appropriate system consideration
- Class I or Class II configuration
- Protections:

Short circuit / Overload / Over voltage / Over temperature

- Extremely low leakage current
- Built-in P.G, P.F signal output and remote sense function
- No load power consumption <0.5W by PS-ON only
- Built-in 12V/0.5A fan supply
- Standby 5V@1A
- LED indicator for power on
- · 3 years warranty

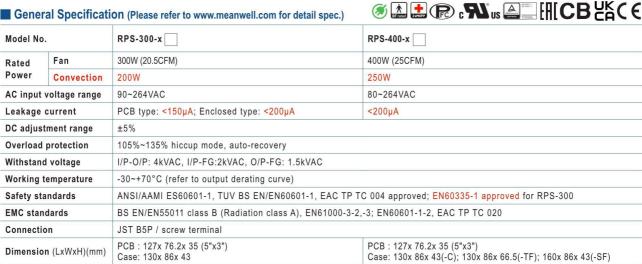

■ 300W—Class I RPS-300				
Model No.	Output (Convection / 20.5CFM)	Tol.	R&N	Effi.
RPS-300-12□	12V, 16.67A / 25A	±3%	120mV	90.0%
RPS-300-15□	15V, 13.33A / 20A	±3%	120mV	90.0%
RPS-300-24□	24V, 8.33A / 12.5A	±2%	150mV	92.5%
RPS-300-27□	27V, 7.4A / 11.12A	±2%	200mV	93.0%
RPS-300-48□	48V, 4.17A / 6.25A	±2%	250mV	93.0%
□ = blank, -C;	blank: PCB type, -C: Enclosed	type		

400W—Cla	ss I or II		RP	S-400
Model No.	Output (Convection/25CFM)	Tol.	R&N	Effi.
RPS-400-12□	12V, 20.8A / 33.3A	±3%	120mV	91.5%
RPS-400-15□	15V, 16.7A / 26.7A	±3%	120mV	92%
RPS-400-18□	18V, 13.9A / 22.3A	±3%	150mV	93%
RPS-400-24□	24V, 10.5A / 16.7A	±2%	150mV	93%
RPS-400-27□	27V, 9.3A / 14.9A	±1%	200mV	93.5%
RPS-400-36□	36V, 7A / 11.2A	±1%	200mV	94%
RPS-400-48□	48V, 5.3A / 8.4A	±1%	200mV	94%
	rF, -SF: ype, -C: Enclosed type, -TF: Enclo ed type with fan on the side	osed type	with fan o	n the top,



Open Frame 200~500W 1&4 Output Medical Grade




500W Single Output

- 5"x3" compact size
- 320W convection, 500W force air, 550W peak
- Built-in active PFC function
- Medical safety approved (2xMOPP)
- Suitable for BF application with appropriate system consideration
- Class I or Class II configuration
- · Protections: Short circuit / Overload / Over voltage / Over temperature
- · Extremely low leakage current
- · P.G, P.F signal output and remote sense function
- No load power consumption <0.5W by PS-ON control
- 12V/0.5A fan supply
- Standby 5V@1A
- LED indicator for power on
- · 3 years warranty

200W Quad Output

- Universal AC input / Full range
- · Built-in active PFC function
- Medical safety approved (2xMOPP) Free air convection for 140W,
- · Suitable for BF application with appropriate system consideration
- · Extremely low leakage current
- · Protections:

Short circuit / Overload / Over voltage / Over temperature



- 200W with 25CFM forced air
- · With P.G and P.F singal output
- · 3 years warranty













RPS-500 127x 76.2x 41 mm(5"x3")



RPS-500-x-C 130x 86x 43 mm



RPS-500-x-TF 130x 86x 66.5 mm



RPS-500-x-SF

AC input voltage range 80~264VAC

Leakage current<220µA

Withstand voltageI/P-O/P: 4kVAC, I/P-FG: 2kVAC,

O/P-FG: 1.5kVAC

Working temperature -30~+70°C (refer to output derating curve)

Safety standards ANSI/AAMI ES60601-1, TUV BS EN/EN60601-1,

IEC60601-1, EAC TP TC 004 approved

EMC standards BS EN/EN55011, EN61000-3-2, 3, EN61204-3,

EN61000-4,2,3,4,5,6,8,11, EN60601-1-2,

EAC TP TC 020

Model No.	Output (Convection/25CFM)	Tol.	R&N	Effi.
RPS-500-12□	12V, 26.7A / 41.6A	±3%	200mV	91%
RPS-500-15□	15V, 21.3A / 33.3A	±3%	200mV	92%
RPS-500-18□	18V, 17.8A / 27.8A	±3%	200mV	92.5%
RPS-500-24□	24V, 13.4A / 20.8A	±2%	200mV	93%
RPS-500-27□	27V, 11.9A / 18.5A	±2%	200mV	93.5%
RPS-500-36□	36V, 8.9A / 13.9A	±1%	200mV	94%
RPS-500-48□	48V, 6.7A / 10.4A	±1%	200mV	94%
□= blank, -C, -TF, -SF: blank: PCB type, -C: Enclosed type, -TF: Enclosed type with fan on the top, -SF: Enclosed type with fan on the side				



MPQ-200

177.8x 107.2x 35.5 mm (7"x 4.2")

AC input voltage range	90~264VAC
AC inrush current	Cold start, 60A at 230VAC
Overload protection	120%~160% Hiccup mode, auto-recovery
Over voltage protection	CH1: 115%~135% rated output voltage,
	Shut down o/p voltage
Leakage current	<180µA
Withstand voltage	I/P-O/P: 4kVAC, I/P-FG:1.5kVAC,
	O/P-FG: 1.5kVAC
Working temperature	-20~+70°C (refer to output derating curve)
Safety standards	ANSI/AAMI ES60601-1, TUV BS EN/EN60601
	IEC60601-1, EAC TP TC 004 approved;
	Design refer to UL62368-1,
EMC standards	BS EN/EN55011/EN55032
	class B, EN61000-3-2,3, EN61000-4-
	2,3,4,5,6,8,11, EN60601-1-2, EN61000-6-2
Connection	3P, 20P / 3.96mm pitch, JST B3P/VH,
	Molex 5566-20; 3P, 8Px2 / 3.96mm pitch.

JSTB3P / B8Px2-VH

5V, 3.0~18A				Max.
	±2%	80mV	78%	193W
12V, 0.7~8.4A	±8%	120mV		
-5V, 0.0~2.4A	±5%	80mV		
12V, 0.0~2.4A	±5%	80mV		
5V, 3.0~18A	±2%	80mV	78%	190W
15V, 0.5~6.0A	±6%	150mV		
-5V, 0.0~2.4A	±5%	80mV		
-15V, 0.0~2.4A	±5%	80mV		
5V, 3.0~18A	±2%	80mV	79%	195W
24V, 0.3~3.6A	±8%	180mV		
12V, 0.0~2.4A	±5%	80mV		
-12V, 0.0~2.4A	±5%	80mV		
5V, 3.0~18A	±2%	80mV	81%	200W
24V, 0.3~3.3A	±8%	180mV		
15V, 0.0~2.4A	±5%	80mV		
15V, 0.0~2.4A	±5%	80mV		
	-5V, 0.0~2.4A 5V, 3.0~18A 15V, 0.5~6.0A -5V, 0.0~2.4A 5V, 3.0~18A 24V, 0.3~3.6A 12V, 0.0~2.4A 5V, 3.0~18A 24V, 0.0~2.4A 5V, 3.0~18A 24V, 0.3~3.3A	-5V, 0.0~2.4A ±5% -12V, 0.0~2.4A ±5% 5V, 3.0~18A ±2% 15V, 0.5~6.0A ±6% -5V, 0.0~2.4A ±5% -5V, 3.0~18A ±2% 24V, 0.3~3.6A ±8% 12V, 0.0~2.4A ±5% 5V, 3.0~18A ±2% 24V, 0.3~3.6A ±5% -12V, 0.0~2.4A ±5% 5V, 3.0~18A ±2% 24V, 0.3~3.3A ±8% 15V, 0.0~2.4A ±5%	-5V, 0.0~2.4A ±5% 80mV -12V, 0.0~2.4A ±5% 80mV 5V, 3.0~18A ±2% 80mV -5V, 0.5~6.0A ±6% 150mV -5V, 0.0~2.4A ±5% 80mV -5V, 3.0~18A ±2% 80mV -15V, 0.0~2.4A ±5% 80mV -12V, 0.3~3.3A ±8% 180mV -15V, 0.0~2.4A ±5% 80mV -15V, 0.0~2.4A ±5% 80mV	-5V, 0.0~2.4A ±5% 80mV -12V, 0.0~2.4A ±5% 80mV 5V, 3.0~18A ±2% 80mV -5V, 0.5~6.0A ±6% 150mV -5V, 0.0~2.4A ±5% 80mV -5V, 3.0~18A ±2% 80mV -5V, 3.0~18A ±2% 80mV -5V, 3.0~18A ±2% 80mV -5V, 3.0~18A ±2% 80mV -12V, 0.0~2.4A ±5% 80mV -15V, 0.0~2.4A ±5% 80mV

Industrial Adaptor 18~36W Desktop & Wall-mounted Type







GST18/25A 93x 54x 36 mm



GST18/25/36B 79x 54x 33 mm



GST18/25/36U 79x 54x 33 mm



GST18/25/36E 79x 54x 33 mm

■ Features

- Global certificates
- Universal AC input / Full range
- No load power consumption < 0.075W
- Energy efficiency Level VI
- Comply with EISA 2007 / DoE, NRCan, AU/NZ MEPS, Korea K-MEPS, EU ErP and CoC Version 5
- -30~+70°C wide range working temperature
- High reliable
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- LED indicator for power on
- Pass LPS
- 3 years warranty



■ General Specification (Please refer to www.meanwell.com for detail spec.)

General S	Decinicatio	n (Please refer to www.meanwell.com t	or detail spec.)	(optional)	
Order No.		GST18	GST25	GST36	
AC input voltag	ge range	85~264VAC			
AC inrush curr	ent (max.)	Cold start, 70A at 230VAC			
Overload	Range	110%~150% rated output power		110%~250% rated output power	
protection	Type	Hiccup mode, auto-recovery			
Over voltage p	rotection	110%~140% rated output voltage, clamp	by zener diode		
Withstand volt	age	I/P-O/P: 4242VDC, 1 minute			
Working tempe	rature	-30~+70°C (refer to output derating curve)			
Safety standards					
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3 CNS13438 class B(A/B/U type); GB9254	s, EN61000-4-2,3,4,5,6,8,11(A/B/E type); (A/B type)	FCC part 15 class B,	
Length of outp	ut cable	120cm of UL1185, 16AWG for 5~12V; 180cm of UL1185, 18AWG for 15~48V	100cm of UL2468, 16AWG for 5~12V; 180cm of UL1185, 18AWG for 15~48V	100cm of UL2468, 16AWG	
Standard DC p (refer to page 73 fe	•	P1J: 2.1øx5.5øx11mm / C+, tuning fork t	уре		

Desktop / Wall-mounted — 18W

Order No.	Output	Tol.	R&N	Effi.
GST18□05-P1J	5V, 0~3.00A	±5%	80mV	81.0%
GST18□07-P1J	7.5V, 0~2.00A	±5%	80mV	85.0%
GST18□09-P1J	9V, 0~2.00A	±5%	80mV	85.0%
GST18□12-P1J	12V, 0~1.50A	±3%	80mV	86.0%
GST18□15-P1J	15V, 0~1.20A	±3%	100mV	87.0%
GST18□18-P1J	18V, 0~1.00A	±3%	150mV	88.0%

Order No.	Output	Tol.	R&N	Effi.	
GST18□24-P1J	24V, 0~0.75A	±2%	150mV	88.0%	
GST18□28-P1J	28V, 0~0.64A	±2%	150mV	88.5%	
GST18□48-P1J	48V, 0~0.375A	±2%	150mV	89.0%	
□=A / B / U / E Class I — A: IEC320-C14 Class II — B: IEC320-C8, U: American 2P, E: European 2P					

■ Desktop / Wall-mounted — 25W

Order No.	Output	Tol.	R&N	Effi.
GST25□05-P1J	5V, 0~4.00A	±5%	80mV	81.5%
GST25□07-P1J	7.5V, 0~2.93A	±5%	80mV	84.5%
GST25□09-P1J	9V, 0~2.55A	±5%	80mV	85.0%
GST25□12-P1J	12V, 0~2.08A	±3%	80mV	86.5%
GST25□15-P1J	15V, 0~1.66A	±3%	100mV	87.0%
GST25□18-P1J	18V, 0~1.38A	±3%	100mV	87.0%

Order No.	Output	Tol.	R&N	Effi.		
GST25□24-P1J	24V, 0~1.04A	±2%	150mV	88.0%		
GST25□28-P1J	28V, 0~0.89A	±2%	150mV	88.0%		
GST25□48-P1J	48V, 0~0.52A	±2%	150mV	89.0%		
□=A / B / U / E Class I — A: IEC320-C14 Class II — B: IEC320-C8, U: American 2P, E: European 2P						

■ Wall-mounted — 36W

Order No.	Output	Tol.	R&N	Effi.
GST36 □ 05-P1J	5V, 0~4.30A	±5%	90mV	82.0%
GST36 □ 09-P1J	9V, 0~3.11A	±5%	90mV	86.0%
GST36□12-P1J	12V, 0~3.00A	±3%	100mV	87.5%

Order No.	Output	Tol.	R&N	Effi.
GST36□24-P1J	24V, 0~1.50A	±2%	150mV	88.5%
GST36 □ 48-P1J	48V, 0~0.75A	±2%	200mV	90.0%
□=B / U / E; B:	IEC320-C8; U:	American 2P,	E: Euro	pean 2P



Industrial Adaptor 40~120W Desktop Type





■ Features

- Global certificates
- Universal AC input / Full range
- No load power consumption <0.075~0.15W by models
- Energy efficiency Level VI
- Comply with EISA 2007 / DoE, NRCan, AU/NZ MEPS, Korea K-MEPS, EU ErP and CoC Version 5
- -30~+70°C wide range working temperature
- High reliable
- Class I power (with earth pin)
- Protections: Short circuit / Over voltage / Overload / Over temp. (except for GST40A)
- Fully enclosed plastic case
- LED indicator for power on
- Pass LPS (except for GST90A/120A)
- 3 years warranty

General Sp	ecification	n ØV	COLOR		SCBFC LACE SEPTING Rendement Energy Verified Rendement R	
Order No.		GST40A	GST60A	GST90A	GST120A	
AC input voltage	erange	90~264VAC; 127~3	70VDC		85~264VAC; 120~370VDC	
AC inrush curre	nt (max.)	Cold start, 65A at 2	230VAC	Cold start, 70A at 230VAC		
Overload	Range	105%~150% rated	output power	110%~150%	105%~160%	
protection	Type	Hiccup mode, auto-	recovery			
Over voltage pro	otection	105%~135% rated	output voltage			
Setup, rise, hold	d up time	1000ms, 50ms, 50m	S	1000ms, 50ms, 20ms	2000ms, 30ms, 20ms	
Withstand voltag	ge	I/P-O/P:3kVAC, I/P	-FG: 2kVAC, O/P-FG	: 0.5kVAC	I/P-FG: 3kVAC	
Working tempera	ature	-30~+70°C (refer to output derating curve)				
Safety standard	ndards UL62368-1, CSA 22.2, TUV BS EN/EN62368-1, BSMI CNS14336, CCC GB4943, PSE J62368-1, AS/NZS62368.* K60950-1, BIS IS13252, EAC TP TC004; SIRIM MS IEC60950-1(optional) approved			E J62368-1, AS/NZS62368.1, KC		
EMC standards		BS EN/EN55032 class	B, EN61000-3-2,3, EN6	61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, CNS13438, GB9254, FCC part15 class B, EAC TP TC 0		
Length of outpu	t cable	GST40A: 100cm of UL1185, 180cm of UL1185, GST60A: 100cm of UL2464, 100cm of UL1185, 150cm of UL1185,	18AWG for 18~48V 16AWG for 5~9V; 16AWG for 12~15V; 16AWG for 18V;	100cm of UL1185, 14AWG for 12~15V; 120cm of UL1185, 16AWG for 19~48V	100cm of UL2464, 16AWGx4C for 12V 120cm of UL2464, 18AWGx4C for 15~48V	
Standard DC plu (refer to page 73 fo	•	P1J: 2.1øx5.5øx11i tuning fork typ	200000 0 00 00	P1M: 2.5øx5.5øx11mm / C+, tuning fork type	R7B: Power DIN 4P with lock type P1M: 2.5øx5.5øx11mm/C+,	

■ Desktop (IEC 320-C14 / Class I) — 40W

Order No.	Output	Tol.	R&N	Effi.
GST40A05-P1J	5V, 0~5.00A	±5%	120mV	84.5%
GST40A07-P1J	7.5V, 0~5.34A	±5%	120mV	87.5%
GST40A09-P1J	9V, 0~4.45A	±5%	120mV	88.5%
GST40A12-P1J	12V, 0~3.34A	±3%	120mV	89.5%
GST40A15-P1J	15V, 0~2.67A	±3%	120mV	90.0%
GST40A18-P1J	18V, 0~2.22A	±3%	120mV	90.0%
GST40A24-P1J	24V, 0~1.67A	±2.5%	150mV	91.0%
GST40A48-P1J	48V, 0~0.84A	±2.5%	200mV	92.0%

Dockton	(IEC 320-	C14 / Class	I) 90W

Order No.	Output	Tol.	R&N	Effi.
GST90A12-P1M	12V, 0~6.67A	±5%	120mV	89.0%
GST90A15-P1M	15V, 0~6.00A	±5%	150mV	89.5%
GST90A19-P1M	19V, 0~4.74A	±4%	180mV	90.0%
GST90A24-P1M	24V, 0~3.75A	±3%	200mV	90.0%
GST90A48-P1M	48V, 0~1.87A	±2.5%	200mV	91.0%

■ Desktop (IEC 320-C14 / Class I) — 60W

Order No.	Output	Tol.	R&N	Effi.
GST60A05-P1J	5V, 0~6.00A	±5%	120mV	85.5%
GST60A07-P1J	7.5V, 0~6.00A	±5%	120mV	88.5%
GST60A09-P1J	9V, 0~6.00A	±5%	120mV	89.0%
GST60A12-P1J	12V, 0~5.00A	±3%	120mV	89.5%
GST60A15-P1J	15V, 0~4.00A	±3%	120mV	89.5%
GST60A18-P1J	18V, 0~3.33A	±3%	150mV	89.5%
GST60A24-P1J	24V, 0~2.50A	±3%	150mV	90.5%
GST60A48-P1J	48V, 0~1.25A	±2.5%	200mV	92.0%

■ Desktop (IEC 320-C14 / Class I) — 120W

Order No.	Output	Tol.	R&N	Effi.
GST120A12-R7B	12V, 0~8.5A	±5%	120mV	88.5%
GST120A15-R7B	15V, 0~7.0A	±5%	120mV	89.0%
GST120A20-□	20V, 0~6.0A	±5%	150mV	90.0%
GST120A24-□	24V, 0~5.0A	±3%	180mV	90.5%
GST120A48-□	48V, 0~2.5A	±2.5%	200mV	91.0%
□= P1M / R7B				



Industrial Adaptor

160~360W Desktop Type





■ Features

- · Global certificates
- No load power consumption<0.15W(GST280A/360A <0.5W)
- Energy efficiency Level VI
- Comply with EISA 2007 / DoE, NRCan, AU/NZ MEPS, Korea K-MEPS, EU ErP and CoC Version 5
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Fanless design, high operating temperature up to +70°C
- Protections: Short circuit / Overload /

Over voltage / Over temperature

- Fully enclosed plastic case
- LED indicator for power on
- Comply with EN60335-1(GST360)
- 450W Peak power(GST360)
- 3 years warranty

■ General Specification



			d* 600000		optional)	
Order No.		GST160A	GST220	GST280A	GST360A	
AC input voltag	je range	85~264VAC; 120~370VI	OC .			
Overload	Range	105%~135% rated outpu	t power			
protection	Туре	Hiccup mode, auto-recov	very			
Over voltage	Range	105%~150% rated outpu	t power	105%~135% rated ou	tput power	
protection	Туре	Shut down o/p voltage, r	e-power on to recover			
Set up, rise, ho	ld up time	2000ms, 50ms, 20ms		2000ms,20ms,16ms	2000ms,20ms,8ms	
Withstand volta	age	I/P-O/P: 3kVAC, 1 minute				
Working tempe	rature	-30~+70°C (refer to outp	out derating curve)			
Safety standard	ds		/ BS EN/EN62368-1, BSMI CNS1 AC TP TC004; SIRIM MS IEC609	5	A 15	
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, FCC part 15 class B, CNS13438, GB9254, GB17625.1, EAC TP TC 020				
Length of output cable		100cm of UL2464, 18AWGx4C for 12V 120cm of UL2464, 18AWGx4C for 15~48V	100cm of UL2464, 16AWGx4C			
Standard DC plug (refer to page 73 for DC plug list)		R7B: Power DIN 4P with	lock type	MOLEX 39-01-2061(cu: GST280A);	39-01-2060(power supply side); stomer side, not provided with 0A12-C8P),MOLEX 39-01-208	

■ Desktop (IEC320-C14/Class I) — 160W

		,		
Order No.	Output	Tol.	R&N	Effi.
GST160A12-R7B	12V, 0~11.5A	±5%	80mV	90.0%
GST160A15-R7B	15V, 0~9.6A	±5%	100mV	91.0%
GST160A20-R7B	20V, 0~8.0A	±4%	120mV	93.0%
GST160A24-R7B	24V, 0~6.67A	±3%	150mV	93.0%
GST160A36-R7B	36V, 0~4.44A	±3%	150mV	92.0%
GST160A48-R7B	48V. 0~3.34A	±3%	200mV	94.0%

■ Desktop (IEC320-C14/Class I) — 220W

Order No.	Output	Tol.	R&N	Effi.
GST220A12-R7B	12V, 0~15.0A	±5%	80mV	90.0%
GST220A15-R7B	15V, 0~13.4A	±5%	100mV	90.0%
GST220A20-R7B	20V, 0~11.0A	±4%	120mV	92.0%
GST220A24-R7B	24V, 0~9.20A	±3%	150mV	93.5%
GST220A36-R7B	36V, 0~6.10A	±3%	200mV	93.0%
GST220A48-R7B	48V, 0~4.60A	±2%	200mV	94.5%

■ Desktop (IEC320-C14/Class I) — 280W

Order No.	Output	Tol.	R&N	Effi.
GST280A12-C6P	12V, 0~21A	±5%	120mV	89.5%
GST280A15-C6P	15V, 0~17A	±5%	120mV	90.0%
GST280A20-C6P	20V, 0~13A	±4%	150mV	92.0%
GST280A24-C6P	24V, 0~11.67A	±3%	200mV	93.0%
GST280A48-C6P	48V, 0~5.84A	±2%	200mV	94.0%

■ Desktop (IEC320-C14/Class I) — 360W

Order No.	Output	Tol.	R&N	Effi.
GST360A12-C8P	12V, 0~27.5A	±5%	120mV	91.0%
GST360A15-C6P	15V, 0~22.7A	±5%	120mV	92.0%
GST360A24-C6P	24V, 0~15A	±3%	200mV	93.0%
GST360A36-C6P	36V, 0~10A	±2%	200mV	94.0%
GST360A48-C6P	48V, 0~7.5A	±2%	200mV	95.0%
GST360A55-C6P	55V, 0~6.55A	±2%	200mV	95.5%



Industrial Adaptor 5~15W Desktop & Wall-mounted Type



5W Green USB Adaptor



- **≜ &** CK(€ GS05E-USB 41.54x 30.5x 20 mm
- · Universal AC input / Full range
- No load power consumption <0.075W
- Energy efficiency Level VI
- Comply with EISA 2007/DoE and EU ErP
- Compact size
- · 2 pole US / European type plug
- · Class II power (without earth pin)
- · Protections: Short circuit / Overload Over voltage / Over temp.
- · Fully enclosed plastic case
- · 2 years warranty

AC input voltage range ... 90~264VAC; 127~370VDC

Overload protection 105%~135% rated output power, hiccup mode,

auto-recovery

Over voltage protection ... 105%~200% rated output voltage, hiccup mode, auto-

recovery

Withstand voltage I/P-O/P: 4242VDC, 1 minute

Working temperature -20~+50°C (refer to output derating curve)

Safety standards U-Type: UL62368-1, CSA22.2, EAC TP TC 004 approved

E-Type: TUV BS EN/EN62368-1, EAC TP TC 004 approved

EMC standards FCC part15 class B(U Type); BS EN/EN55032 class B(E Type)

Standard DC plug...... USB Type A

Order No.	Output	Tol.	R&N	Effi.
GS05U-USB	5V, 0~1A	±5%	90mV	74.0%
GS05E-USB	5V, 0~1A	±4%	80mV	74.5%

6W Green Adaptor

- · Universal AC input / Full range
- No load power consumption < 0.1W
- · Energy efficiency Level VI
- Comply with EISA 2007/DoE and EU ErP Pass LPS
- · 2 pole US / European type plug
- · Class II power (without earth pin)
- · Protections:Short circuit / Overload /
 - Over voltage
- Fully enclosed plastic case
- · 2 years warranty





AC input voltage range90~264VAC; 127~370VDC AC inrush current(max.) .. Cold start, 50A at 230VAC Overload protection Hiccup mode, auto-recovery Over voltage protection ... Clamp by zener diode >120% Withstand voltageI/P-O/P: 4242VDC, 1minute

Working temperature0~+50°C (refer to output derating curve)

Safety standardsUL62368-1, CSA 22.2, TUV BS EN/EN62368-1, EAC TP TC 004 EMC standardsFCC part15 class B(U Type); EN55032 class B(E Type) Length of output cable120cm of 18AWG for 5~9V; 180cm of 24AWG for 12~48V

Order No.	Output	Tol.	R&N	Effi.
GS06□-1P1J	5V, 0~1.00A	±5%	50mV	68.0%
GS06 □ -11P1J	7.5V, 0~0.80A	±5%	80mV	80.0%
GS06 □ -2P1J	9V, 0~0.66A	±5%	80mV	75.0%
GS06 □ -3P1J	12V, 0~0.50A	±3%	100mV	77.0%
GS06 □ -4P1J	15V, 0~0.40A	±3%	120mV	79.5%
GS06□-5P1J	18V, 0~0.33A	±3%	150mV	81.0%
GS06□-6P1J	24V, 0~0.25A	±2%	180mV	81.0%
GS06□-8P1J	48V, 0~0.125A	±2%	200mV	83.0%
□ = U/E; U: Amer	ican 2P, E: Europear	1 2P		

15W Green Adaptor

- · Universal AC input / Full range
- No load power consumption <0.075W
- · Energy efficiency Level VI
- · Comply with EISA 2007/DoE and EU ErP
- · Protections: Short circuit / Overload / Over voltage
- · Pass LPS
- · Fully enclosed plastic case
- · 2 years warranty



GS15U

71x 34x 50 mm



GS15B

GS15 vs. SGAS15

Di Series	fference	Dimmension (LxWxH,mm)	Working Temp.	Warranty
	Α	100x58.5x32.8		
GS15	В	100000.0000	0~50 C	2 40000
6315	Е	71x34x50		2 years
	U	71x34x50		
	Α	85.7x50.9x33.8(-23%)		
SGAS15	В	80x39x27.7(-55%)	-20~+70°C	2 40000
3GA315	Е	87.6x42.1x24.7(-50%)	-20~+70 C	3 years
	U	*Take up one stop on power strip		

Order No.	Output	Tol.	R&N	Effi.
Order No.	Output	101.	Kun	L
GS15□-1P1J	5.0V, 0~2.40A	±5%	50mV	80.0%
GS15□-11P1J	7.5V, 0~1.60A	±5%	80mV	82.5%
GS15□-2P1J	9.0V, 0~1.66A	±5%	80mV	85.0%
GS15□-3P1J	12V, 0~1.25A	±3%	80mV	85.0%
GS15□-4P1J	15V, 0~1.00A	±3%	100mV	85.0%
GS15□-5P1J	18V, 0~0.83A	±3%	120mV	85.0%
GS15□-6P1J	24V, 0~0.625A	±2%	150mV	85.5%
GS15□-8P1J	48V, 0~0.31A	±2%	240mV	87.0%
	IEC320-C14, B: IEC European 2P, U: A		P	

The size and performance of SGAS15A/B/E/U are better than GS15A/B/E/U. It is highly recommended to ues SGAS15A/B/E/U for all new project



Industrial Adaptor 6~60W Extreme Small Desktop & Wall-mounted





Features

- Extreme small and space-saving
- Takes up one spot on power strip(U/E Type)
- Universal AC input/Full range
- No low power consumption<0.075~0.1W by models
- Energy efficiency Level VI

- Comply with EISA 2007/DoE, EU ErP and meet CoC Version5
- -20~+70 °C wide range working temperature
- Protections: short circuit/over load/Over voltage
- Pass LPS
- 3 years warranty

Order No.

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Order No.	SGAS06□	SGAS15□	SGAS60□		
AC input voltage range	90~264VAC; 127~370VDC	·	,		
Overload protection	Hiccup mode, recovers automat	Hiccup mode, recovers automatically after fault condition is removed			
Over voltage protection	Clamp by Zene diode				
Withstand voltage	I/P-O/P: 4242VDC	I/P-O/P: 3KVAC	I/P-O/P: 4242VDC		
Working temperature	-20~+70°C (refer to output derating curve)				
Safety standards	A/B Type:CB/TUV/UL 62368-1,EAC TPTC004 approved E Type:CB/TUV EN62368-1,EAC TP TC 004 approved U Type:CB/UL 62368-1 approved				
EMC standards	E Type:BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11; U Type:FCC part15 classB				
Length of output cable	120cm, 20AWG for 5~9V; 180cm, 24AWG for 12~48V	120cm, 20AWG for 5~12V; 120cm, 24AWG for 15V; 180cm, 24AWG for 24V	100cm, 16AWG for 5~15V; 150cm, 18AWG for 24~48V;		
Standard DC plug (refer to page 73 for DC plug list)	P1J: 2.1øx5.5øx11mm / C+, tuni	ng fork type			

Wall-mounted— 6W

Model No.	Output	Tol.	R&N	Effi.
SGAS06□05-P1J	5V, 0~1.00A	±5%	75mV	75%
SGAS06□07-P1J	7.5V, 0~0.8A	±5%	85mV	77%
SGAS06□09-P1J	9V, 0~0.66A	±5%	80mV	80%
SGAS06□12-P1J	12V, 0~0.5A	±3%	80mV	80%

Order No.	Output	Tol.	R&N	Effi.	
SGAS06□15-P1J	15V, 0~0.4A	±3%	80mV	81%	
SGAS06□24-P1J	24V, 0~0.25A	±3%	80mV	83%	
SGAS06□48-P1J	48V, 0~0.125A	±2%	80mV	84%	
□ = U / E Class II — U: American 2P, E: European 2P					

Desktop/Wall-mounted— 15W

Model No.	Output	Tol.	R&N	Effi.
SGAS15□05-P1J	5V, 0~2.40A	±5%	80mV	79%
SGAS15□09-P1J	9V, 0~1.66A	±5%	80mV	84%
SGAS15□12-P1J	12V, 0~1.25A	±3%	80mV	85%
SGAS15□15-P1J	15V, 0~1.00A	±3%	80mV	85%

Oraci ito.	output	101.	11011		
SGAS15□24-P1J	24V, 0~0.625A	±2%	100mV	86%	
□ = A / B / U / E Class I — A: IEC320-C14 Class II — B: IEC320-C8, U: American 2P, E: European 2P					

D & N

Effi

Output

■ Wall-mounted— 60W

Model No.	Output	Tol.	R&N	Effi.
SGAS60□05-P1J	5V, 0~6A	±5%	80mV	85%
SGAS60□12-P1J	12V, 0~5A	±3%	80mV	88%
SGAS60□15-P1J	15V, 0~4A	±3%	80mV	88%

Order No.	Output	Tol.	R&N	Effi.	
SGAS60□24-P1J	24V, 0~2.5A	±2%	100mV	89%	
SGAS60□48-P1J	48V, 0~1.25A	±2%	120mV	90%	
□=U / E ;U: American 2P, E: European 2P					

Industrial Adaptor 12~25W Slim Wall-mounted





■ Features

- Universal AC input / Full range
- No load power consumption <0.075W
- Energy efficiency level VI


Standard DC Plug

(refer to page 73 for DC plug list)

- · Comply with EISA 2007/DoE, EU ErP
- 2 pole US/European type plug
- Class II power (without earth pin)
- Protections: Short citcuit / Over load / Over voltage
- Pass LPS
- Fully enclosed plastic case
- 3 years warranty

SGA18U/E. It is highly recommended to ues SGAS15E/U for all new project

■ General Specification (Please refer to www.meanwell.com for detail spec.)

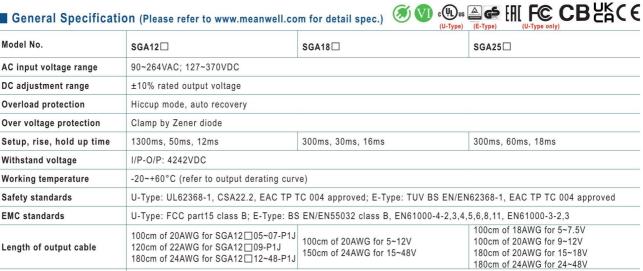

USB: Type A; P1J: 2.1øx5.5øx11mm / C+, tuning fork type

■ Wall-mounted — 12W						
Model No.	Output	Tol.	R&N	Effi.		
SGA12□05-USB	5V, 2.40A	±5%	50mV	80.0%		
SGA12□05-P1J	5V, 2.40A	±5%	50mV	80.0%		
SGA12□07-P1J	7.5V, 1.60A	±5%	50mV	83.0%		
SGA12□09-P1J	9V, 1.33A	±3%	80mV	82.5%		
SGA12□12-P1J	12V, 1.00A	±3%	80mV	83.0%		
SGA12□15-P1J	15V, 0.80A	±3%	80mV	83.0%		
SGA12□18-P1J	18V, 0.666A	±3%	80mV	83.5%		
SGA12□24-P1J	24V, 0.50A	±2%	100mV	84.0%		
SGA12□48-P1J	48V, 0.25A	±2%	100mV	86.0%		

■ Wall-mounte	d — 18W	NRND		
Model No.	Output	Tol.	R&N	Effi.
SGA18□05-P1J	5V, 3.00A	±5%	80mV	81.5%
SGA18□09-P1J	9V, 2.00A	±5%	80mV	84.0%
SGA18□12-P1J	12V, 1.50A	±3%	80mV	85.5%

Model No.	Output	Tol.	R&N	Effi.
SGA18□15-P1J	15V, 1.20A	±3%	80mV	85.5%
SGA18□18-P1J	18V, 1.00A	±3%	80mV	86.0%
SGA18□24-P1J	24V, 0.75A	±2%	100mV	86.5%
SGA18□48-P1J	48V, 0.375A	±2%	120mV	87.5%
□ = U/E; U: America	n 2P. E: European	2P		

■ Wall-mounted — 25W							
Model No.	Output	Tol.	R&N	Effi.			
SGA25□05-P1J	5V, 4.00A	±5%	80mV	81.0%			
SGA25□07-P1J	7.5V, 2.93A	±5%	80mV	85.0%			
SGA25□09-P1J	9V, 2.77A	±5%	80mV	85.5%			
SGA25□12-P1J	12V, 2.08A	±3%	80mV	86.0%			
SGA25□15-P1J	15V, 1.66A	±3%	80mV	86.5%			
SGA25□18-P1J	18V, 1.38A	±3%	80mV	86.5%			
SGA25□24-P1J	24V, 1.04A	±2%	80mV	87.0%			
SGA25□48-P1J	48V, 0.52A	±2%	120mV	88.5%			
□ = U/E; U: Ameri	can 2P, E: Europ	ean 2P					



□ = U/E; U: American 2P, E: European 2P

Industrial Adaptor 40W&60W Slim Wall-mounted





■ Features

- Slim Type
- · Universal AC input / Full range
- No load power consumption <0.075W ~0.15W by models for SGA40 and SGA60 5~7.5V;
- Energy efficiency Level VI
- · Comply with EISA 2007/DoE, EU ErP

- 2 pole US/European type plug
- Class II power (without earth pin)
- Protections: Short circuit / Overload / Over voltage
- Pass LPS
- Fully enclosed plastic case
- LED indicator for power on (60W only)
- 3 years warranty

■ General Specification

Model No.	SGA40□	SGA60□			
AC input voltage range	90~264VAC; 127~370VDC				
Overload protection	Hiccup mode, auto recovery				
Over voltage protection	110%~140% rated output voltage, clamp by Zener diode				
Setup, rise, hold up time	500ms, 100ms, 12ms	500ms, 50ms, 12ms			
Withstand voltage	I/P-O/P:4242VDC, 1 minute				
Working temperature	-20~+50°C (refer to output derating curve)	-20~+50°C (refer to output derating curve)			
Safety standards	U-Type: UL62368-1, CSA 22.2, EAC TP TC004 approved; E-Type: TUV BS EN/EN62368-1, EAC TP TC 004 approve				
EMC standards	U-Type: FCC part15 Class B; E-Type: BS EN/EN55032 C	lass B			
I anoth of outfult cable		100cm of 16AWG for 5~18V 150cm of 18AWG for 24~48V			
Standard DC Plug (refer to page 73 for DC plug list)	P1J: 2.1øx5.5øx11mm/C+, turning fork type				

■ Wall-mounted — 40W							
Model No.	Output	Tol.	R&N	Effi.			
SGA40□05-P1J	5V, 0~5.00A	±5%	120mV	83.0%			
SGA40□09-P1J	9V, 0~4.44A	±5%	120mV	86.5%			
SGA40□12-P1J	12V, 0~3.33A	±3%	120mV	86.5%			
SGA40□15-P1J	15V, 0~2.66A	±2%	120mV	86.5%			
SGA40□18-P1J	18V, 0~2.22A	±2%	120mV	87.0%			
SGA40□24-P1J	24V, 0~1.67A	±2%	150mV	88.0%			
SGA40□48-P1J	48V, 0~0.84A	±2%	150mV	89.0%			
□=U / E, U: A	□ =U / E, U: American 2P, E: European 2P						

■ Wall-moun				
Model No.	Output	Tol.	R&N	Effi.
SGA60□05-P1J	5V, 0~6.00A	±5%	80mV	83.5%
SGA60□07-P1J	7.5V, 0~6.00A	±5%	80mV	85.0%
SGA60□09-P1J	9V, 0~5.50A	±5%	80mV	86.5%
SGA60□12-P1J	12V, 0~5.00A	±3%	80mV	87.5%
SGA60□15-P1J	15V, 0~4.00A	±3%	80mV	87.0%
SGA60□18-P1J	18V, 0~3.33A	±2%	80mV	88.0%
SGA60□24-P1J	24V, 0~2.50A	±2%	100mV	88.0%
SGA60□48-P1J	48V, 0~1.25A	±2%	120mV	89.5%
□=U / E, U: An	nerican 2P, E: Eur	opean 2P		

Industrial Adaptor 12~40W Interchangeable Type





■ Features

- Interchangeable AC plugs (plug kit sold separately)
- Universal AC input / Full range
- No load power consumption <0.075W
- Energy efficiency Level VI
- Comply with EISA 2007/DoE and EU ErP
- Class II power (without earth pin)
- Protections: Short circuit / Over voltage / Overload
- Fully enclosed plastic case
- LED indicator for power on
- Pass LPS
- 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	GE12	GE18	GE24	GE30	GE40
AC input voltage range	90~264VAC / 0.4A for	GE12; 90~264VAC / 0.	7A for GE18/24/30		
Withstand voltage	I/P-O/P:4242VDC, 1 m	I/P-O/P:4242VDC, 1 minute			
Working temperature	-10~+50°C (refer to output derating curve) -30~+70°				-30~+70°C
Safety standards	UL62368-1, CSA22.2, TUV BS EN/EN62368-1, CCC GB4943, AS/NZS 62368.1, EAC TP TC 004 approved				TC 004 approved
EMC standards	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, FCC part15 class B, GB9254, GB17625.1				5.1
Length of output cable	ength of output cable 100cm for GE12 5~12V, GE18/24 5~12V, GE30 12V and GE40 5~12V 150cm for GE12/18 15~48V, GE24 15~48V, GE30 15~24V and GE40 15~48V				
Standard DC plug (refer to page 73 for DC plug list)	P1J: 2.1øx5.5øx11mm / C+, tuning fork type				

■ Wall-mounted (Interchangeable Type)—12W

Order No. (Main body) GE12I05-P1J GE12I07-P1J GE12I09-P1J GE12I15-P1J	Output 5V, 0~2.00A 7.5V, 0~1.33A 9V, 0~1.33A 12V, 0~1.00A 15V, 0~0.80A	Tol. ±5% ±5% ±5% ±3% ±3%	R&N 50mV 75mV 100mV 120mV	Effi. 80.0% 82.0% 84.0% 85.0%
GE12I18-P1J	18V, 0~0.83A	±3%	180mV	85.0%
GE12I24-P1J	24V, 0~0.625A	±3%	240mV	85.5%

■ Wall-mounted	(Interchange	neable Type	18W
Truil-illouillou	(I I I C I C I I C I I C I I	dennie i Abe	1011

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE18I05-P1J	5V, 0~2.40A	±5%	50mV	80.5%
GE18I07-P1J	7.5V, 0~1.73A	±5%	75mV	82.5%
GE18I09-P1J	9V, 0~2.00A	±5%	100mV	85.0%
GE18I12-P1J	12V, 0~1.50A	±3%	120mV	86.0%
GE18I15-P1J	15V, 0~1.20A	±3%	150mV	86.5%
GE18I18-P1J	18V, 0~1.00A	±3%	180mV	87.0%
GE18I24-P1J	24V, 0~0.75A	±3%	240mV	87.0%
GE18I48-P1J	48V, 0~0.375A	±3%	300mV	87.0%

■ Wall-mounted (Interchangeable Type)—24W

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE24I05-P1J	5V, 0~3.00A	±5%	50mV	81.0%
GE24I07-P1J	7.5V, 0~2.00A	±5%	75mV	83.0%
GE24I09-P1J	9V, 0~2.22A	±5%	100mV	85.5%

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE24I12-P1J	12V, 0~2.00A	±3%	120mV	86.0%
GE24I15-P1J	15V, 0~1.60A	±3%	150mV	86.0%
GE24I18-P1J	18V, 0~1.33A	±3%	180mV	87.0%
GE24I24-P1J	24V, 0~1.00A	±3%	240mV	87.5%
GE24I48-P1J	48V, 0~0.50A	±3%	300mV	89.0%

■ Wall-mounted (Interchangeable Type)—30W

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE30I12-P1J	12V, 0~2.50A	±3%	120mV	84%
GE30I15-P1J	15V, 0~2.00A	±3%	150mV	86%
GE30I18-P1J	18V, 0~1.66A	±3%	180mV	87%
GE30I24-P1J	24V, 0~1.25A	±3%	240mV	87%

■ Wall-mounted (Interchangeable Type)—40W

Order No. (Main body)	Output	Tol.	R&N	Effi.
GE40I05-P1J	5V, 0~4.00A	±3%	100mV	81.0%
GE40I07-P1J	7.5V, 0~2.66A	±3%	100mV	85.0%
GE40I09-P1J	9V, 0~3.30A	±3%	100mV	86.0%
GE40I12-P1J	12V, 0~3.30A	±3%	120mV	87.0%
GE40I15-P1J	15V, 0~2.70A	±3%	150mV	87.0%
GE40I18-P1J	18V, 0~2.20	±3%	180mV	88.0%
GE40I24-P1J	24V, 0~1.67A	±3%	240mV	88.0%
GE40I36-P1J	36V, 0~1.11A	±3%	300mV	89.0%
GE40I48-P1J	48V, 0~0.83A	±3%	300mV	89.0%

Interchangeable AC Plug Specifically for GE Series

AC Plug Type and Order No.						
AC Plug-AU3 (for GE40 only)	AC Plug-AU (for GE12~30)	AC Plug-UK (for GE12~40)	AC Plug-EU (for GE12~40)	AC Plug-US (for GE12~40)	AC Plug-MIX (for GE12~30) AC Plug-MIX3 (for GE40 only)	
			0 0			
Australian Type	Australian Type	U.K. Type	European Type	U.S. Type	Mixed Four Type	

Note: The main body unit and AC plug should be ordered seperately. The main body needs to be used along with any one of the AC plug.



Industrial Adaptor 25~50W Triple Output Desktop Type





■ Features

- Universal AC input / Full range
- No load power consumption <0.3W
- Energy efficiency Level VI
- Protections:
 - Short circuit / Overload / Over voltage / Over temp. (GP25)
- Comply with EISA 2007/DoE, EU ErP

- · Class I power unit (with earth pin) for A type; Class II power unit (without earth pin) for B type
- Fully enclosed plastic case
- LED indicator for power on
- Dual output available (optional)
- 3 years warranty



Model No.	GP25A	GP25B	GP50A					
AC input voltage range	90~264VAC; 135~370VDC	00~264VAC ; 135~370VDC						
AC inrush current (max.)	Cold start, 60A at 230VAC		Cold start, 45A at 230VAC					
Overload protection	Hiccup mode, auto recovery							
Over voltage protection	110%~140% of +5V output	110%~140% of +5V output						
Setup, rise, hold up time	800ms, 50ms, 20ms	1000ms, 50ms, 20ms						
Withstand voltage	I/P-O/P:3kVAC, I/P-FG:1.5kVAC , 1 minute							
Working temperature	-20~+70°C (refer to output derating curve)							
Safety standards	UL62368-1, CSA22.2, TUV BS EN/EN623	368-1, EAC TP TC 004 approved						
EMC standards	BS EN/EN55032 class B, EN61000-3-2,3	, EN61000-4-2,3,4,5,6,11, FCC part15 cla	ss B					
Length of output cable	150cm of UL2464		100cm of UL2464					
Standard DC Plug (refer to page 73 for DC plug)	R1B: DIN 5P							
Dimension (LxWxH)(mm)	107.5x 67x 36 146x 75.5x 43							

29W		Ø	GP2	5A/B	Series
Order No.	Output	Tol.	R&N	Effi.	Max.
GP25□13A-R1B	5V, 0.5~2.5A	±5%	50mV	80.0%	28.5W
	12V, 0.2~1.2A	-5%~+10%	100mV		
	-5V, 0.1~0.3A	±3%	50mV		
GP25□13D-R1B	5V, 0.5~2.5A	±5%	60mV	80.0%	28W
	12V, 0.2~1.0A	±5%	120mV		
	-12V, 0.1~0.3A	±3%	50mV		
GP25□14E-R1B	5V, 0.5~2.5A	±5%	100mV	80.5%	29W
	15V, 0.1~0.8A	-5%~+15%	150mV		
	-15V, 0.1~0.3A	±3%	50mV		
□=A / B; A: IEC	320-C14 / Class	I ,B: IEC 32	0-C8 / Cla	ass II	

■ 50W		(y 🕡 GP	50A S	eries
Order No.	Output	Tol.	R&N	Effi.	Max.
GP50A13A-R1B	5V, 0.0~4.0A	±5%	50mV	83.5%	46.5W
	12V, 0.3~2.0A	±3%	100mV		
	-5V, 0.1~0.5A	-5%~+10%	100mV		
GP50A13D-R1B	5V, 0.0~4.0A	±5%	50mV	84.0%	50W
	12V, 0.3~2.0A	±3%	150mV		
	-12V, 0.1~0.5A	-5%~+8%	100mV		
GP50A14E-R1B	5V, 0.0~4.0A	±5%	50mV	84.5%	50W
	15V, 0.3~1.5A	±3%	150mV		
	-15V, 0.1~0.5A	-5%~+15%	150mV		
GP50A58F	16V, 0.4~2A	±5%	180mV	86%	71.2W
(optional)	48V, 30~150mA	-5%~+10%	180mV		
	-16V, 0.4~2A	-5%~+10%	180mV		

Moistureproof Adaptor 60~90W IP67 Level





■ Features

- · IP67 design for power body
- · Universal AC input / Full range AC input 180~264VAC only
- No load power consumption <0.15W
- · Energy efficiency Level VI
- E-Type: meet CoC Version 5 (OWA-60E/90E); comply with EU ErP

U-Type: Comply with EISA 2007/DoE and NRCan

- · Class II power (without earth pin)
- Fanless design, cooling by free air convection
- · Fully enclosed plastic case
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Suitable for household appliances or the electronic applications at highly dusty or damp environment
- 5 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.		OWA-60 🗆	OWA-90				
AC input vo	Itage range	90~264VAC; 127~370VDC					
Overload pr	otection	E-Type: 105~115% hiccup mode, auto-recovery; U-Type: 95~108% constant current limiting, auto-recovery					
Over voltage protection 110%~140% rated output voltage, re-power on to recover							
Over temper	ature protection	Shut down output voltage, re-power on to recov	er				
Withstand v	oltage	I/P-O/P: 3.75KVAC					
Working ten	nperature	-35~+70°C	-40~+70°C (refer to output derating curve)				
Safety standards		E-Type: DEKRA BS EN/EN60335-1(except for 48~54V), EN61558-1/2-16 approved; U-Type: UL8750 listed approved, EAC TP TC 004	E-Type: DEKRA BS EN/EN60335-1(except for 42~54V), EN61558-1/2-16 approved; U-Type: UL8750 listed approved,EAC TP TC 004				
EMC standa	rds	E-Type: BS EN/EN55032 class B, EN55014, EN61000-3-2,-3; U-Type: FCC Part 15, EAC TP TC 020					
Standard	Input	E-Type: CEE 7/7 EU plug; U-Type: NEMA 1-15P plug					
plug	Output		E-Type: XLR 4P, male type;				
Refer to P73	for DC plug list	2.1øx5.5øx11mm / C+, tuning fork type	U-Type: P1M, 2.5øx5.5øx11mm / C+, tuning fork type (OWA-90U 20~54V only) or R7B, Power DIN 4P with lock type				
	Input	E-Type: 150cm of H05RN-F 1.0mm ² x2C; U-Type	e: 150cm of SVT 18AWGx2C				
Length of cable	Output	E-Type: 30cm of H05RN-F 1.0mm ² x2C U-Type: 30cm of UL1185 16AWG x2C	E-Type: 30cm of H05RN-F 1.0mm ² x2C U-Type: 30cm of UL2464 18AWG x4C for R7B; 30cm of UL2464 16AWGx2C for P1M				

OWA-60 Series W & W W FAICBUKCEFC

	(E-Type) (U-Type, 42~5	54V) (U-Type, 12~36V)	(E-Type)	(E-Type) (U-Type)
Model No.	Output	Tol.	R&N	Effi.
OWA-60 □ -12	12V, 0~5A	±4.0%	150mV	88%
OWA-60 □ -15	15V, 0~4A	±4.0%	150mV	89%
OWA-60 □ -20	20V, 0~3A	±4.0%	150mV	89%
OWA-60 □ -24	24V, 0~2.5A	±3.0%	150mV	90%
OWA-60 □ -30	30V, 0~2A	±3.0%	200mV	90%
OWA-60 □ -36	36V, 0~1.67A	±2.0%	200mV	90%
OWA-60 □ -42	42V, 0~1.5A	±1.0%	250mV	90%
OWA-60 □ -48	48V, 0~1.25A	±1.0%	250mV	91%
OWA-60 □ -54	54V, 0~1.12A	±1.0%	350mV	91%
□ = E / U ; E: Eu	ropean 2P, U: Ame	erican 2P		

■ OWA-90 Series	W P	ھ ھ	(h)	c (N) se [H[FACE	FC
		(E-Type)	(U-Type, 42~54V)	(U-Type, 12~36V)	(E-Type)	(U-Type

Model No.	Output	Tol.	R&N	Effi.
OWA-90 □ -12	12V, 0~7.5A	±4.0%	150mV	89%
OWA-90 □ -15	15V, 0~6A	±4.0%	150mV	90%
OWA-90 □ -20-▲	20V, 0~4.5A	±4.0%	150mV	90%
OWA-90 □ -24-▲	24V, 0~3.75A	±3.0%	150mV	90%
OWA-90 □ -30-▲	30V, 0~3A	±3.0%	200mV	90%
OWA-90 □ -36-▲	36V, 0~2.5A	±2.0%	200mV	91%
OWA-90 □ -42-▲	42V, 0~2.15A	±1.0%	250mV	91%
OWA-90 □ -48-▲	48V, 0~1.88A	±1.0%	250mV	91%
OWA-90 □ -54-▲	54V, 0~1.67A	±1.0%	350mV	91%
□ = E / U ; E: Eur	opean 2P, U: Ame	erican 2P;	▲=Blank(R	7B)/P1M

Moistureproof Adaptor 120~200W IP67 Level





Features

- · IP67 design for power body
- · Class II power unit, no FG
- · High efficiency up to 94%
- Universal AC input / Full range (OWA-120U/200U) AC input 180~264VAC only (OWA-120E/200E)
- No load power consumption <0.15W
- Energy efficiency Level VI
- U-Type: Comply with EISA 2007/DoE and NRCan
- · Fanless design, cooling by free air convection
- Fully enclosed plastic case
- · Protections: Short circuit / Over current / Over voltage / Over temperature
- · Suitable for household appliances or the electronic applications at highly dusty or damp environment
- · 5 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.		OWA-120	OWA-200 🗆				
AC input vol	tage range	U Type: 90~264VAC; 127~370VDC; E Type: 180~264VAC; 254~370VDC					
Overload protection		E-Type: 105~115% hiccup mode, auto-recovery; U-Type: 95~108% constant current limiting, auto-recovery	105% ~ 150% hiccup mode, auto-recovery				
Over voltage	protection	110%~140% rated output voltage, re-power on to recover	150%~200% rated output voltage, re-power on to recover				
Over temper	ature protection	Shut down output voltage, re-power on to recover	Shut down o/p voltage, re-power on to recover				
Withstand vo	oltage	I/P-O/P: 3.75KVAC	I/P-O/P:4.2KVAC				
Working temperature		-40~+70°C (refer to output derating curve)					
Safety standards		E-Type: DEKRA BS EN/EN60335-1(except for 48~54V), EN61558-1/2-16 approved; U-Type: UL8750 listed approved, EAC TP TC 004	E-Type: DEKRA BS EN/EN60335-1(except for 48~54V), EN61558-1/2-16 approved; U-Type: UL62368-1 listed approved, EAC TP TC 004				
EMC standa	rds	E-Type: BS EN/EN55032 class B, EN55014, EN61000-3-2,-3; U-Type: FCC Part 15, EAC TP TC 020	E-Type: BS EN/EN55032 class B, EN55035, EN55014-1, EN61000-3-2/3 U-Type: FCC Part 15, EAC TP TC 020				
Standard	Input	E-Type: CEE 7/7 EU plug; U-Type: NEMA 1-15P plug					
olug	Output	E Torre VI DAD II Torre IV/OON I/DDV AD D7D					
Refer to P73 for DC plug list		E-Type: XLR4P; U-Type: KYCON KPPX-4P R7B					
I anath of	Input	E-Type: 150cm of H05RN-F 1.0mm ² x2C; U-Type: 150cm of SVT 18AW	Gx2C				
Length of cable	Output	E-Type: 30cm of H07RN-F 1.5mm ² x2C U-Type: 30cm of UL2464 18AWG x4C					

■ OWA-120 Series W P • HICB K CEF©

	() ha/ (a .) ha/	() [)	(m .) heal (m .) he
Model No.	Output	Tol.	R&N	Effi.
OWA-120E-12	12V, 0~9.6A	±4.0%	150mV	87.5%
OWA-120U-12	12V, 0~10A	±4.0%	150mV	87.5%
OWA-120 □ -15	15V, 0~8A	±4.0%	150mV	89.0%
OWA-120 □ -20	20V, 0~6A	±4.0%	150mV	90.0%
OWA-120 □ -24	24V, 0~5A	±4.0%	150mV	90.5%
OWA-120 □ -30	30V, 0~4A	±3.0%	200mV	90.0%
OWA-120 □ -36	36V, 0~3.4A	±2.0%	200mV	90.0%
OWA-120 🗆 -42	42V, 0~2.9A	±1.0%	250mV	90.5%
OWA-120 🗆 -48	48V, 0~2.5A	±1.0%	250mV	90.5%
OWA-120 🗆 -54	54V, 0~2.3A	±1.0%	350mV	90.5%
□ = E / U ; E: Eur	opean 2P, U: Ame	erican 2P		

OWA-200 Series		CUL us e) (U-Type)	ERICE LA	CEF© (E-Type) (U-Type)
Model No.	Output	Tol.	R&N	Effi.
OWA-200E-12	12V, 0~15A	±5.0%	150mV	91.0%
OWA-200U-12	12V, 0~15A	±5.0%	150mV	91.0%
OWA-200 □ -20	20V, 0~10A	±4.0%	150mV	92.5%
OWA-200 🗆 -24	24V, 0~8.3A	±4.0%	150mV	93.0%
OWA-200 □ -36	36V, 0~5.55A	±4.0%	200mV	94.0%
OWA-200 □ -42	42V, 0~4.75A	±3.0%	250mV	94.0%
OWA-200 □ -48	48V, 0~4.17A	±3.0%	250mV	94.0%
OWA-200 🗆 -54	54V, 0~3.71A	±3.0%	350mV	94.0%

□ = E / U; E: European 2P, U: American 2P

Changeable DC Plug Converter Selection Guide



- · Flexible solution for small quantity
- · Easy modification for different size of DC plug
- · Off-the-shelf and no MOQ
- If you can't find the required DC plug in this table,
 please contact MEAN WELL's sales reps.



Note: Please refer to MEAN WELL adaptor specifications for DC plug rating and compatibility.



Medical Adaptor 6~25W High Reliable Green Medical Grade MEAN WELL





■ Features

- Universal AC input / Full range
 Medical safety approved(2xMOPP)
 Suitable for BF application with appropriate system consideration
 Extremely low leakage current
 No load power consumption <0.075~0.3W by models
 Energy efficiency Level VI (GSM06 and GSM18/25 5~9V for Level V)
 Comply with EISA 2007/DoE, NRCan, AU/NZ MEPS, EU ErP and meet CoC Version 5(GSM18/25); EISA 2007 and EU ErP(GSM06)
- Class II power(without earth pin)

- Protections: Short circuit / Overload / Over voltage
 Fully enclosed plastic case
 LED indicator for power on(except for GSM06/12)
 Optional lock type DC plug
 Certificates: B-Type: UL / CUL / TUV / CB / EAC / FCC / CE U-Type: UL / CUL / CB / EAC / FCC
 E-Type: TUV / CB / EAC / CE

 3 years warranty
- 3 years warranty

Order No.		GSM06□			GSM12□		GSM18□		GSM25□	
AC input voltage	range	80~264VA	C; 113~3	70VDC						
Leakage current		<50µA			<100µA		<50µA			
Setup, rise, hold	up time	1000ms, 50)ms, 12m	IS	500ms, 30ms, 1	6ms	500ms, 30ms, 16m	ıs		
Withstand voltag	e	I/P-O/P: 50	656VDC				I/P-O/P: 4kVAC			
Working tempera	ture	0~+50°C			-20~+70°C		-25~+60°C (refer	o output de	erating curve)
Safety standards	i	EAC TP TC	004 appr	oved U-Typ	e: ANSI/AAMI ES		CAN/CSA-C22, TUV B -11, CAN/CSA-C22, E oved			01-1-11,
EMC standards		U-Type: FC0	C Part 15	EN class B, EA	160601-1-2 medical C TP TC 020	l level, FCC Part 15 cla	N61000-4-2,3,4,5,6,8,1 ass B, EAC TP TC 020 11, EN61204-3, EN606			P TC 020
Length of output	cable	120cm, 22A\ 180cm, 24A\			100cm , 18AWG 120cm , 22AWG 180cm , 24AWG	for 9V	120cm of UL1185, 180cm of UL1185, 180cm of UL1185, GSM25 15~48V	16AWG for	GSM25 12V	,
Standard DC plu	g	P1J: 2.1øx	5.5øx 1	1mm / C+	, tuning fork typ	e (refer to page 73	for DC plug list)			
Dimension (LxW)	(H)(mm)	66x 32x 42	.5		62.2x 27.4x 45.	5	79x 54x 33			
Wall-mounte	ed — 6W									
Model No.	Outp		Tol.	R&N	Effi.	Model No.	Output	Tol.	R&N	Effi.
GSM06□05-P1J	5V, 0~1		±5%	50mV	68%	GSM06 □ 15-P1J	Output	±5%	120mV	79%
GSM06□06-P1J	6V, 0~1	1.00A	±5%	50mV	74%	GSM06□15-P1J	15V, 0~0.40A	±5%	150mV	80%
GSM06□07-P1J	7.5V, 0~0	A08.0	±5%	80mV	74%		18V, 0~0.33A			82%
GSM06□09-P1J	9V, 0~0		±5%	80mV	76%	GSM06□24-P1J	24V, 0~0.25A American 2P, E: Eu	±4%	180mV	82%
GSM06□12-P1J	12V, 0~0).50A	±5%	100mV	77%	LI - 0 / E , 0.	American ZF, E. Eu	opean Zr		
Wall-mounte	ed — 12V	N								
Model No.	Outp	ut	Tol.	R&N	Effi.	Model No.	Output	Tol.	R&N	Effi.
GSM12□05-USB	5V, 0~2	2.40A	±5%	60mV	80%	GSM12□15-P1J	15V, 0~0.8A	±3%	80mV	84%
GSM12□05-P1J	5V, 0~2	2.40A	±5%	60mV	80%	GSM12□18-P1J	18V, 0~0.66A	±3%	80mV	85%
GSM12□07-P1J	7.7V, 0~1	1.00A	±5%	60mV	82%	GSM12□24-P1J	24V, 0~0.50A	±2%	80mV	85%
GSM12□09-P1J	9.5V, 0~1	1.33A	±4%	60mV	82%	GSM12□48-P1J	48V, 0~0.25A	±2%	100mV	87%
GSM12□12-P1J	12V, 0~1	1.00A	±3%	80mV	82.5%	□ = U / E ; U: Ar	nerican 2P, E: Euro	pean 2P		
Desktop / W	all-mour	nted — 1	8W							
Model No.	Outp	ut	Tol.	R&N	Effi.	Model No.	Output	Tol.	R&N	Effi.
GSM18□05-P1J	5V. 0~3	3 00A	±5%	60mV	80%	GSM18□18-P1J	18V. 0~1.00A	±3%	150mV	86%
GSM18□07-P1J	7.5V, 0~2		±5%	80mV	83%	GSM18 □ 24-P1J	24V, 0~0.75A	±2%	180mV	87%
GSM18□09-P1J	9V, 0~2		±5%	80mV	84%	GSM18 □ 48-P1J	48V, 0~0.375A	±2%	240mV	88%
GSM18□12-P1J	12V, 0~	1.50A	±3%	120mV	85%	□=B / U / E ;				
GSM18□15-P1J	15V, 0~1	1.20A	±3%	120mV	85.5%	B: IEC320-C	8, U: American 2P,	E: Europeai	n 2P	
Desktop / W	all-mour	nted — 2	5W							
Model No.	Outp	ut	Tol.	R&N	Effi.	Model No.	Output	Tol.	R&N	Effi.
GSM25□05-P1J	5V. 0~4	4.00A	±6%	60mV	80%	GSM25□18-P1J	18V. 0~1.38A	±3%	150mV	86%
GSM25□07-P1J	7.5V, 0~2		±5%	80mV	83%	GSM25 □ 24-P1J	24V, 0~1.04A	±2%	180mV	87%
GSM25□09-P1J	9V, 0~2		±5%	80mV	84%	GSM25□48-P1J	48V, 0~0.52A	±2%	240mV	88%
GSM25□12-P1J	12V, 0~2	2.08A	±3%	120mV	86%	□=B / U / E ;				
	15V, 0~		±3%	120mV	86%	D 150000 0	8, U: American 2P, I		0.0	

Medical Adaptor 36~60W High Reliable Green Medical Grade MEAN WELL





Features


- Medical safety approved(2xMOPP)
- · Suitable for BF application with appropriate system consideration (U/E/B-Type only)
- · Extremely low leakage current
- Energy efficiency Level VI

Dimension (LxWxH)(mm)

- Comply with EISA 2007/DoE, NRCan, AU/NZ MEPS, EU ErP and meet CoC Version 5
- · Class I(with earth Pin): A-Type Class II(without earth Pin): B/U/E-Type
- · Protections: Short circuit / Overload /
 - Over voltage / Over temperature (GSM60A/B)
- LED indicator for power on (except for GSM60U/E)
- · 3 years warranty



■ General Specification (Please refer to www.meanwell.com for detail spec.)

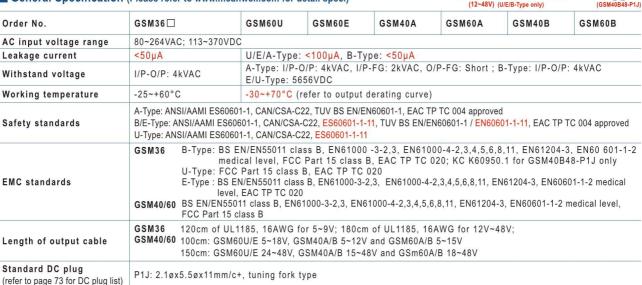

75.5x 32x 47.5 (Slim Width) 125x 50x 31.5

■ Desktop/ Wall-mounted — 36W									
Order No.	Output	Tol.	R&N	Effi.					
GSM36 □ 05-P1J	5V, 0~4.50A	±6%	80mV	80%					
GSM36 □ 07-P1J	7.5V, 0~4.32A	±5%	80mV	83%					
GSM36□09-P1J	9V, 0~4.00A	±5%	80mV	84%					
GSM36 □ 12-P1J	12V, 0~3.00A	±3%	120mV	86%					
GSM36 □ 15-P1J	15V, 0~2.40A	±3%	120mV	87%					
GSM36 □ 18-P1J	18V, 0~2.00A	±3%	150mV	87%					
GSM36 □ 24-P1J	24V, 0~1.50A	±2%	180mV	87%					
GSM36 □ 48-P1J	48V, 0~0.75A	±2%	240mV	88%					
□ =B / U / E ;									
B: IEC320-C8	B, U: American 2P, I	E: Europea	n 2P						

79x 54x 33

■ Wall-mounted	— 60W			
Order No.	Output	Tol.	R&N	Effi.
GSM60□05-P1J	5V, 0~6.00A	±5%	100mV	80%
GSM60□07-P1J	7.5V, 0~6.00A	±5%	100mV	85%
GSM60 □ 09-P1J	9V, 0~5.50A	±5%	100mV	87%
GSM60□12-P1J	12V, 0~4.50A	±5%	100mV	88%
GSM60□15-P1J	15V, 0~4.00A	±5%	120mV	88%
GSM60 □ 18-P1J	18V, 0~3.33A	±3%	120mV	88%
GSM60□24-P1J	24V, 0~2.50A	±3%	120mV	88%
GSM60□48-P1J	48V, 0~1.25A	±3%	150mV	90%
□=U / F · U· Americ	can 2P E. Europea	n 2P		

■ Desktop — 40	W			
Order No.	Output	Tol.	R&N	Effi.
GSM40□05-P1J	5V, 0.1~5A	±5%	80mV	81.0%
GSM40□07-P1J	7.5V, 0.1~5.34A	±5%	80mV	85.5%
GSM40□09-P1J	9V, 0.1~4.45A	±5%	100mV	86.0%
GSM40□12-P1J	12V, 0.1~3.34A	±3%	100mV	88.0%
GSM40□15-P1J	15V, 0.1~2.67A	±3%	100mV	88.5%
GSM40□18-P1J	18V, 0.1~2.22A	±3%	120mV	89.5%
GSM40□24-P1J	24V, 0.1~1.67A	±2.5%	150mV	90.0%
GSM40□48-P1J	48V, 0.1~0.84A	±2.5%	150mV	91.0%
□=A / B: A: IEC 3	320-C14 / Class I .B:	IEC 320-C8	/ Class II	

■ Desktop — 60	W			
Order No.	Output	Tol.	R&N	Effi.
GSM60□05-P1J	5V, 0.1~6A	±5%	80mV	81.5%
GSM60□07-P1J	7.5V, 0.1~6A	±5%	80mV	86.0%
GSM60 □ 09-P1J	9V, 0.1~6A	±5%	100mV	87.5%
GSM60 □ 12-P1J	12V, 0.1~5A	±3%	100mV	88.0%
GSM60 □ 15-P1J	15V, 0.1~4A	±3%	100mV	88.5%
GSM60 □ 18-P1J	18V, 0.1~3.33A	±3%	120mV	89.0%
GSM60 □ 24-P1J	24V, 0.1~2.5A	±3%	150mV	90.5%
GSM60□48-P1J	48V, 0.1~1.25A	±2.5%	240mV	91.5%
□=A / B; A: IEC	320-C14 / Class I ,B	: IEC 320-C	8 / Class II	



Medical Adaptor 90~120W High Reliable Green Medical Grade MEAN WELL





■ Features

- · Universal AC input / Full range
- Medical safety approved (2xMOPP)
- Suitable for BF application with appropriate system consideration (B-Type only)
- · Extremely low leakage current
- No load power consumption <0.15W
- Energy efficiency Level VI

Dimension (LxWxH)(mm)

- Comply with EISA 2007/DoE, NRCan, AU/NZ MEPS, EU ErP and meet CoC Version 5
- · A-Type: Class I (with earth Pin); B-Type: Class II (without earth Pin)

167x 67x 35

- Protections: Short circuit / Overload / Over voltage / Over temp.
- · Fully enclosed plastic case
- · LED indicator for power on
- · Optional lock type DC plug
- · 3 years warranty

FC FILCBUKCE General Specification (Please refer to www.meanwell.com for detail spec.) GSM90B GSM120B Order No. GSM90A GSM120A AC input voltage range 80~264VAC: 113~370VDC <115µA Leakage current <100uA <115uA <100uA 110%~150% rated output power 105%~160% rated output power Range Overload Hiccup mode, auto-recovery Type 105%~135% rated output voltage Range Over voltage protection Type Shut down o/p voltage, re-power on to recover Setup, rise, hold up time 1000ms, 50ms, 40ms 1000ms, 50ms, 30ms 1500ms, 30ms, 40ms A-Type: I/P-O/P: 4kVAC, I/P-FG: 2kVAC, O/P-FG: Short A-Type: I/P-O/P: 4kVAC, I/P-FG: 2kVAC, O/P-FG:0.5kVAC, Withstand voltage B-Type: I/P-O/P: 4kVAC B-Type: I/P-O/P: 4kVAC Working temperature -30~+70°C (refer to output derating curve) A-Type: ANSI/AAMI ES60601-1, CAN/CSA-C22, TUV BS EN/EN60601-1, EAC TP TC 004 approved Safety standards B-Type: ANSI/AAMI ES60601-1, CAN/CSA-C22, ES60601-1-11, TUV BS EN/EN60601-1, EN60601-1-11, EAC TP TC 004 approved BS EN/EN55011 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61204-3, EN60601-1-2 medical level, FCC Part 15 **EMC** standards class B,EAC TP TC 020 100cm of UL1185, 14AWG for 12~15V; 100cm of UL2464, 18AWGx4C for 12V; Length of output cable 120cm of UL1185, 16AWG for 19~48V 120cm of UL2464, 18AWGx4C for 15~48V Standard DC plug P1M: 2.5øx5.5øx11mm/c+, tuning fork type R7B: Power DIN 4P with lock type (refer to page 73 for DC plug list)

Desktop (IEC	320-C14 / Clas	s I) - 90	W	
Model No.	Output	Tol.	R&N	Effi.
GSM90A12-P1M	12V, 0~6.67A	±5%	120mV	88.0%
GSM90A15-P1M	15V, 0~6.00A	±5%	120mV	89.0%
GSM90A19-P1M	19V, 0~4.74A	±4%	120mV	89.0%
GSM90A24-P1M	24V, 0~3.75A	±3%	180mV	90.0%
GSM90A48-P1M	48V, 0~1.87A	±2.5%	200mV	91.0%
■ Desktop (IEC	320-C14 / Clas	s I) — 12	0W	
Model No.	Output	Tol.	R&N	Effi.
GSM120A12-R7B	12V, 0~8.50A	±5%	100mV	88.0%
GSM120A15-R7B	15V, 0~7.00A	±5%	120mV	89.0%
GSM120A15-R7B GSM120A20-R7B	15V, 0~7.00A 20V, 0~6.00A	±5% ±4%	120mV 180mV	89.0% 89.0%
GSM120A20-R7B	20V, 0~6.00A	±4%	180mV	89.0%

145x 60x 32

Desktop (IEC	320-C8 / Class	II) — 90V	N	
Model No.	Output	Tol.	R&N	Effi.
GSM90B12-P1M	12V, 0~6.67A	±5%	120mV	88.0%
GSM90B15-P1M	15V, 0~6.00A	±5%	120mV	89.0%
GSM90B19-P1M	19V, 0~4.74A	±4%	120mV	89.0%
GSM90B24-P1M	24V, 0~3.75A	±3%	180mV	90.0%
GSM90B48-P1M	48V, 0~1.87A	±2.5%	200mV	91.0%
■ Desktop (IEC	320-C8 / Class	II) — 120)W	
Model No.	Output	Tol.	R&N	Effi.
GSM120B12-R7B	12V, 0~8.50A	±5%	100mV	88.0%
GSM120B15-R7B	15V, 0~7.00A	±5%	120mV	89.0%
GSM120B15-R7B GSM120B20-R7B	15V, 0~7.00A 20V, 0~6.00A	±5% ±4%	120mV 150mV	89.0% 89.5%

Medical Adaptor 160~220W High Reliable Green Medical Grade MEAN WELL





Features

- Universal AC input / Full range
- Medical safety approved (2xMOPP)
- · Extremely low leakage current
- No load power consumption < 0.15W
- Energy efficiency Level VI
- · Comply with EISA 2007/DoE, NRCan, AU/NZ MEPS, EU ErP and meet CoC Version 5
- High efficiency up to 94.5%
- Fanless design, high operating temperature up to +70°C
- Suitable for BF application with appropriate system consideration (B-Type only) A-Type: Class I (with earth Pin); B-Type: Class II (without earth Pin)
 - Protections: Short circuit / Overload / Over voltage / Over temp.
 - · Fully enclosed plastic case
 - · LED indicator for power on
 - 3 years warranty







General Specif	ication (F	Please refer to www.mear	well.com for detail spec.)	FC C7	MUS FE III CDCAC	
Order No.		GSM160A	GSM160B	GSM220A	GSM220B	
AC input voltage range		80~264VAC; 113~370V	DC			
Leakage current		<115µA	<100µA	<115µA	<100µA	
Overload	Range	105%~150% rated out	put power	105%~135% rat	ed output power	
protection	Type	Hiccup mode, auto-re	Hiccup mode, auto-recovery			
Over voltage	Range	105%~135% rated outp	105%~135% rated output voltage			
protection	Type	Shut down o/p voltage	re-power on to recover			
Setup, rise, hold up	time	2000ms, 50ms, 24ms				
Withstand voltage)	A-Type: I/P-O/P: 4kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC; B-Type: I/P-O/P: 4kVAC				
Working temperat	ure	-30~+70°C (refer to o	utput derating curve)			
Safety standards			601-1, CAN/CSA-C22, TUV BS E 601-1, CAN/CSA-C22, ES60601		04 approved I, EAC TP TC 004, EN60601-1-11 approved	
EMC standards		BS EN/EN55011 class I class B, EAC TP TC 02		2,3,4,5,6,8,11, EN61204-3,	EN60601-1-2 medical level, FCC Part 15	
Length of output	cable	100cm of UL2464, 16AV 120cm of UL2464, 18AV	and the second s	100cm of UL246	64, 16AWGx4C	
Standard DC plug (refer to page 73 for D		R7B: power DIN 4P wit	h lock type			
Dimension (LxWx	H)(mm)	175x 72x 35		210x 85x 46		

■ Desktop (IEC 320-C14 / Class I) — 160W

Order No.	Output	Tol.	R&N	Effi.
GSM160A12-R7B	12V, 0~11.5A	±5%	80mV	90.0%
GSM160A15-R7B	15V, 0~9.6A	±5%	100mV	91.0%
GSM160A20-R7B	20V, 0~8.0A	±4%	100mV	92.5%
GSM160A24-R7B	24V, 0~6.67A	±3%	120mV	93.0%
GSM160A48-R7B	48V, 0~3.34A	±3%	150mV	94.0%

■ Desktop (IEC 320-C14 / Class I) — 220W

Order No.	Output	Tol.	R&N	Effi.
GSM220A12-R7B	12V, 0~15.0A	±5%	80mV	90.0%
GSM220A15-R7B	15V, 0~13.4A	±5%	80mV	90.0%
GSM220A20-R7B	20V, 0~11.0A	±4%	120mV	92.0%
GSM220A24-R7B	24V, 0~9.20A	±3%	120mV	93.5%
GSM220A48-R7B	48V, 0~4.60A	±2%	150mV	94.5%

■ Desktop (IEC 320-C8 / Class II) — 160W

		,		
Order No.	Output	Tol.	R&N	Effi.
GSM160B12-R7B	12V, 0~11.5A	±5%	80mV	90.0%
GSM160B15-R7B	15V, 0~9.6A	±5%	100mV	91.0%
GSM160B20-R7B	20V, 0~8.0A	±4%	120mV	92.5%
GSM160B24-R7B	24V, 0~6.67A	±3%	120mV	93.5%
GSM160B48-R7B	48V, 0~3.34A	±3%	150mV	94.0%

■ Desktop (IEC 320-C8 / Class II) — 220W

Order No.	Output	Tol.	R&N	Effi.
GSM220B12-R7B	12V, 0~15.0A	±5%	80mV	90.0%
GSM220B15-R7B	15V, 0~13.4A	±5%	80mV	90.0%
GSM220B20-R7B	20V, 0~11.0A	±4%	120mV	92.0%
GSM220B24-R7B	24V, 0~9.20A	±3%	120mV	93.5%
GSM220B48-R7B	48V, 0~4.60A	±2%	150mV	94.5%



Medical Adaptor 6~18W High Reliable Green Interchangeable Type





■ Features

- Interchangeable AC plugs (plug kit sold separately)
- Medical safety approved (2xMOPP)
- Suitable for BF application with appropriate system consideration
- No load power consumption <0.075W (<0.1W for GEM12I18V/48V)
- Energy efficiency Level VI (Level V for GEM06I)
- Comply with EISA 2007/DoE and EU ErP
- Class II power (without earth pin)
- Protections: Short circuit / Overload / Over voltage
- Extremely low leakage current
- Fully enclosed plastic case
- IP21 or IP22 by models
- 3 years warranty



General Specification (Please refer to www.meanwell.com for detail spec.)

Off (Please refer to www.meanwen.com for detail spec.	C 1 OS ONE LINE OD CHC				
GEM06I	GEM12I	GEM18I			
80~264VAC; 113~370VDC		1			
<55µA	<55µА <100µА				
I/P-O/P: 5656VDC, 1 minute					
-20~+70°C		-20~+50°C			
TUV BS EN/EN60601-1/EN60601-1-11,ANSI/ AAMI ES60601-1/ES60601-1-11(3.1 version), CAN/CSA-C22, EAC TP TC 004, GEM06 05-USB without EN60601-1-11, ANSI/ AAMII ES60601-1-11	ANSI/AAMI ES60601-1/60601-1-11, CAN/CSA-C22, TUV BS EN/EN60601-1/60601-1-11 approved				
BS EN/EN55011 Class B, EN61000-3-2,3, EN61000	0-4-2,3,4,5,6,8,11, FCC part18 class B				
5~9V: 120cm 12~24V: 180cm	5~7.5V: 100cm 9V: 120cm 12~48V: 180cm 5~12V: 100c 15~48V: 150				
P1J: 2.1øx5.5øx11mm/C+, turning fork type (refer t	to page 73 for DC plug list)	•			
	GEM06I 80~264VAC; 113~370VDC <55µA I/P-O/P: 5656VDC, 1 minute -20~+70°C TUV BS EN/EN60601-1-11(3.1 version), CAN/CSA-C22, EAC TP TC 004, GEM06 05-USB without EN60601-1-11, ANSI/ AAMII ES60601-1-11 BS EN/EN55011 Class B, EN61000-3-2,3, EN61000 5-9V: 120cm 12~24V: 180cm	GEM12I 80~264VAC; 113~370VDC <55μA I/P-O/P: 5656VDC, 1 minute -20~+70°C TUV BS EN/EN60601-1/EN60601-1-11, ANSI/ AAMI ES60601-1/ES60601-1-11(3.1 version), CAN/CSA-C22, EAC TP TC 004, GEM06 05-USB without EN60601-1-11, ANSI/ AAMII ES60601-1-11 BS EN/EN55011 Class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, FCC part18 class B 5~9V: 120cm 12~24V: 180cm 57.5V: 100cm 9V: 120cm			

■ Wall-mounted(Interchangeable	Type)	-6W	NEW
Order No. (main body)	Output	Tol.	R&N	Effi.
GEM06I05-USB	5V, 0~1.2A	±5%	50mV	70%
GEM06I05-P1J	5V, 0~1.2A	±5%	50mV	70%
GEM06I06-P1J	6V, 0~1.0A	±5%	50mV	74%
GEM06I07-P1J	7.5V, 0~0.8A	±5%	80mV	74%
GEM06I09-P1J	9V, 0~0.66A	±5%	80mV	76%
GEM06I12-P1J	12V, 0~0.5A	±5%	100mV	76%
GEM06I15-P1J	15V, 0~0.4A	±5%	120mV	79%
GEM06I18-P1J	18V, 0~0.33A	±5%	150mV	79%
GEM06I24-P1J	24V, 0~0.25A	±4%	180mV	80%

Wall-mounted(I	nterchangeable	Type)-	–12W	
Order No. (main body)	Output	Tol.	R&N	Effi.
GEM12I05-USB	5V, 0~2.4A	±5%	60mV	80%
GEM12I05-P1J	5V, 0~2.4A	±5%	60mV	80%
GEM12I07-P1J	7.5V, 0~1.6A	±5%	60mV	82%
GEM12I09-P1J	9V, 0~1.33A	±4%	60mV	82%

Order No. (main body)	Output	Tol.	R&N	Effi.
GEM12I12-P1J	12V, 0~1A	±3%	80mV	82.5%
GEM12I15-P1J	15V, 0~0.8A	±3%	80mV	84%
GEM12I18-P1J	18V, 0~0.66A	±3%	80mV	85%
GEM12I24-P1J	24V, 0~0.5A	±2%	80mV	85%
GEM12I48-P1J	48V, 0~0.25A	±2%	100mV	87%

Wall-mounted	Wall-mounted(Interchangeable Type)—18W						
Order No. (main body)	Output	Tol.	R&N	Effi.			
GEM18I05-P1J	5V, 0~3.00A	±5%	60mV	80%			
GEM18I09-P1J	9V, 0~2.00A	±5%	60mV	84%			
GEM18I12-P1J	12V, 0~1.50A	±3%	80mV	84%			
GEM18I15-P1J	15V, 0~1.20A	±3%	80mV	84%			
GEM18I18-P1J	18V, 0~1.00A	±2%	80mV	84%			
GEM18I24-P1J	24V, 0~0.75A	±2%	80mV	85%			
GEM18I48-P1J	48V, 0~0.375A	±2%	80mV	87%			

Medical Adaptor 30~60W High Reliable Green Interchangeable Type





■ Features

- Interchangeable AC plugs (plug kit sold separately)
- Medical safety approved (2xMOPP)
- Suitable for BF application with appropriate system consideration
- No load power consumption < 0.075W (<0.1W for GEM30I/40I,<0.15W for GEM60I)
- Energy efficiency Level VI
- Comply with EISA 2007/DoE and EU ErP
- Class II power (without earth pin)
- Protections: Short circuit / Overload / Over voltage
- Extremely low leakage current
- Fully enclosed plastic case
- IP21 or IP22 by models
- 3 years warranty

Order No.	GEM30I	GEM40I	GEM60I		
AC input voltage range	80~264VAC; 113~370VDC				
Leakage current	<100µA	<100µA			
Withstand voltage	I/P-O/P: 5656VDC, 1 minute	I/P-O/P: 5656VDC, 1 minute			
Working temperature	-25~+70°C (refer to output derating curve)				
Safety standards	ANSI/AAMI ES60601-1/60601-1-11, CAN (GEM18I TUV&UL60601-1 only)	ANSI/AAMI ES60601-1/60601-1-11, CAN/CSA-C22, TUV BS EN/EN60601-1/60601-1-11 approved (GEM18I TUV&UL60601-1 only)			
EMC standards	BS EN/EN55011 Class B, EN61000-3-	-2,3, EN61000-4-2,3,4,5,6,8,11, FCC pa	art18 class B		
Length of output cable	5~12V: 100cm 15~24V: 150cm 48V: 180cm	5~15V: 100cm 5~18V: 100cm 5~18V: 150cm 24~48V: 150cm			
Standard DC plug	P1J: 2.1øx5.5øx11mm/C+, turning fork type (refer to page 73 for DC plug list)				

■ Wall-mounted(Interchangeable Type)—30W

Order No. (main body)	Output	Tol.	R&N	Effi.
GEM30I05-P1J	5V, 0~4.00A	±5%	100mV	82%
GEM30I07-P1J	7.5V, 0~3.33A	±5%	100mV	86%
GEM30I09-P1J	9V, 0~3.33A	±5%	100mV	87%
GEM30I12-P1J	12V, 0~2.50A	±3%	100mV	87%
GEM30I15-P1J	15V, 0~2.00A	±3%	100mV	87%
GEM30I18-P1J	18V, 0~1.66A	±2%	100mV	88%
GEM30I24-P1J	24V, 0~1.25A	±2%	100mV	88.5%
GEM30I48-P1J	48V, 0~0.625A	±2%	100mV	90%

■ Wall-mounted(Interchangeable Type)—40W

Order No. (main body)	Output	Tol.	R&N	Effi.
GEM40I05-P1J	5V, 0~5.00A	±5%	100mV	84%
GEM40I09-P1J	9V, 0~4.00A	±5%	100mV	87%
GEM40I12-P1J	12V, 0~3.33A	±3%	100mV	88%

Order No. (main body)	Output	Tol.	R&N	Effi.
GEM40I15-P1J	15V, 0~2.66A	±3%	120mV	88%
GEM40I18-P1J	18V, 0~2.22A	±2%	120mV	88%
GEM40I24-P1J	24V, 0~1.66A	±2%	120mV	89%
GEM40I48-P1J	48V, 0~0.83A	±2%	200mV	90.5%

■ Wall-mounted(Interchangeable Type)—60W

	,	" '		
Order No. (main body)	Output	Tol.	R&N	Effi.
GEM60I05-P1J	5V, 0~6.00A	±5%	100mV	80%
GEM60I07-P1J	7.5V, 0~6.00A	±5%	100mV	85%
GEM60I09-P1J	9V, 0~5.50A	±5%	100mV	87%
GEM60I12-P1J	12V, 0~4.50A	±5%	100mV	88%
GEM60I15-P1J	15V, 0~4.00A	±5%	120mV	88%
GEM60I18-P1J	18V, 0~3.33A	±3%	120mV	88%
GEM60I24-P1J	24V, 0~2.50A	±3%	120mV	88%
GEM60I48-P1J	48V. 0~1.25A	±3%	150mV	90%

■ Interchangeable AC Plug Specifically for GEM Series

AC Plug Type and Order No.					
AC Plug-AU2 AC Plug-UK2 AC Plug-EU2 AC Plug-US2 AC Plug-MIX2					
PULSE SO	Priori S S S S S S S S S S S S S S S S S S S	TO THE PUSH W	PUSH OF		
Australian Type	U.K. Type	European Type	U.S. Type	Mixed Four Type	

[▶] The main body unit and AC plug should be ordered seperately. The main body needs to be used along with any one of the AC plug.



Modular Series

400W Configurable Power





■ Features


- · Slim and 1U profile
- · Universal AC input / Full range
- Fanless design
- Flexible output channels with maximum 4 outputs
- 24/48Vdc master output channel models
- 5V/12V/15V/24V DC-DC modules configurable
- · No minimum load required
- Protections: Short circuit / Overload/ Over voltage/ Over temperature
- -30 \sim +70°C wide operating temperature
- LED to indicate power status
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)




Model No.	UMP-400
AC input voltage range	90~264VAC; 127~370VDC
DC adjustment range	24V: 22.8~25.2V 48V: 45.6~50.4V
Overload protection	105~135% rated output power; CH1/V1, constant current limiting protection; CH2/V2, CH3/V3, CH4/V4, Hiccup mode protection
Over voltage protection	24V: 26.4~31.2V; 48V: 52.8~62.4V; shut down O/P voltage, re-power on to recover
Over temperature protection	Shut down O/P voltage, re-power on to recover
Withstand voltage	I/P-O/P: 4KVAC; I/P-FG: 2KVAC; O/P-FG: 1.5KVAC
Working temperature	-30~+70°C (refer to de-rating curve)
Safety standards	EAC TP TC 004, UL62368-1, Dekra seal BS EN/EN62368-1 approved; Design refer to ANSI/AAMI ES60601-1, TUV BS EN/EN60601-1, IEC60601-1 (3rd edition)
EMC standards	BS EN/EN55032 Class B, EN61000-3-2,3; EN61000-4-2, 3, 4, 6, 8, 11; EN-61000-6-2; EAC TP TC 020; Design refer to EN55011, EN60601-1-2
Connection	Terminal block
Dimension (LxWxH)(mm)	250 x 89 x 37

■ Order Information







I	400W		UMP-400
	Model No.	Output	Effi.
	UMP-400-24	24V, 0~16.7A	88.5%*
	UMP-400-48	48V, 0~8.3A	88.5%*
	*PSU at full load with ea	ach type of NID35/65/100 mod	lules at nominal voltage

DC-I	OC O/P Module	Photo	O/P Voltage	O/P Current
Α	NID35-05		5V	3.5A
В	NID35-12	- Salar	12V	2.9A
С	NID35-15	Killi	15V	2.4A
D	NID35-24		24V	1.5A
Е	NID65-05		5V	6.5A
F	NID65-12		12V	4.9A
G	NID65-15	The state of the s	15V	4.3A
Н	NID65-24		24V	2.7A
1	NID100-05		5V	8.0A
J	NID100-12		12V	6.0A
K	NID100-15	THE PERSON NAMED IN	15V	5.2A
L	NID100-24	***	24V	3.4A
М	NID35-05		-5V	3.5A
N	NID35-12	William William	-12V	2.9A
0	NID35-15		-15V	2.4A
Р	NID65-05		-5V	6.5A
Q	NID65-12	The state of	-12V	4.9A
R	NID65-15	Salar Salar	-15V	4.3A
S	NID100-05	- 10 C	-5V	8.0A
Т	NID100-12	S. Ladin	-12V	6.0A
U	NID100-15	PULL	-15V	5.2A



Modular Series

650W/1200W Configurable Power





■ Description

NMP family is a 1U low profile modular power (configurable type power supply). This family comprises two power wattage for the line-up, 650W and 1200W, and the output modules deliver up to 240W with adjust options for the major working voltages used in industry 5V, 12V, 24V, 48V. NMP family complies with two categories of safety approvals, the medical and ITE standard, offering the best flexibility for various types of applications.

Features

- · Medical (2x MOPP)/ITE safety approval
- Suitable for BF application with appropriate system consideration (Touch current <100µA/264VAC)
- 1U low profile
- · Universal AC input / Full range
- Output voltage and current programmable
- Built-in parallel function / Output programmable / Globalenable / Remote local ON-OFF / Auxiliary DC output / Over temperature alarm / DC OK
- · Cooling by thermostatically controlled fan with fan alarm function
- · Protections: Short circuit / Overload /

Over voltage / Over temperature for all output modules

5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.	NMP650	NMP1K2				
AC input voltage range	90~264VAC ; 120~370VDC					
Power Factor	PF >0.95/230VAC, PF > 0.98/115VAC at full load					
AC inrush current (max.)	Cold start, 40A at 230VAC, 25A at 115VAC					
Max output power	650W	0W 1200W				
Efficiency (typical)	91%, full case load with H / K module at nominal 24V / 48V only	90.5%, full case load with H / K module at nominal 24V / 48V only				
	88.5%, full case load with each type of module at nominal voltage					
Over temperature protection	Output shutdown, auto-recovery					
Withstand voltage	I/P-O/P: 4kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC					
Working temperature	-30~+50°C@100%, -30~+70°C @ 60% load at 230VAC					
Safety standards	ANSI/AAMI ES60601-1, TUV BS EN/EN60601-1, IEC 600 IEC/UL62368-1, TUV BS EN/EN62368-1 approved	601-1 (3 rd edition), EAC TP TC 004 approved				
EMC standards	BS EN/EN55011, EN55032 Class B, EN61000-3-2,-3, EN EN55024 heavy industry level, criteria A	161000-4-2,3,4,5,6,8,11, EN60601-1-2,				
Connection	Input side: 3P/9.5mm pitch terminal block &HRS DF11-1	ODP-2DS				
Dimension (LxWxH)(mm)	250x 89x 41	250x 127x 41				
	I .	I .				

Modular Series 650W/1200W Configurable Power



■ NMS-240: 1-SLOT isolated single output (240W max.)


Item Code	Output	Vdc adj.	Tol.	R&N.	Max.	
С	5V, 0~36A	3~6V	±2%	100mV	180W	
Е	12V, 0~20A	6~15V	±1%	150mV	240W	
Н	24V, 0~10A	15~30V	±1%	150mV	240W	
K	48V, 0~5A	30~55V	±1%	250mV	240W	

■ NMD-240: 1-SLOT isolated dual output (240W max.)

Item Code	Output	Vdc adj.	Tol.	R&N.	Max.
D	30V, 0~5A	3~30V	±2%	250mV	24014/
	30V, 0~5A	3~30V	±2%	250mV	240W

Parallel Connection Accessory							
FAP-009 (For NMS-240, 2 units)							
FAP-010 (For NMS-240, 3 units)	0						
NMS-240-P2/P3/P4/P5/P6 (to parallel NMS-240 in 2/3/4/5/6 modules)							
Series Connection A	Accessory						
FAS-005 (For 1-slot modules: NMS-240)							
Blank Plate Acce	essory						
Blank-NMS240							

■ Output Configuration Guide

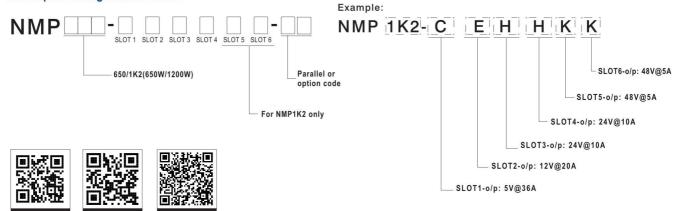

UMP, NMP and MP Series

Difference Series	Wattage	Slots	Output Mod	Safety	Dimenion (LxWxH)	Warranty
UMP	400W	4 channels	NID-35/65/100	62368-1	250x 89x 37mm	3 years
NMP	650W 1200W	4 slots 6 slots	NMS-240 NMD-240	62368-1+60601-1	250x 89x 41mm 250x127x 41mm	5 years
MP	450W 600W 1000W	5 slots 5 slots 7 slots	MS-75 MS-150 MS-210 MS-300 MS-360 MD-100	62368-1	254x 127x 63.5mm 278x127x 63.5mm 278x 117.8x 63.5mm	3 years

Modular Series 450W/650W/1000W Configurable Power







Description

Modular series are switching power supplies with modular design that consist of two stages: front-end PFC and output modules. With the power factor correction, the line input is rectified into high DC voltage (around 390VDC) by the front-end PFC stage, and then the DC output modules will transfer the operating voltage into all kinds of DC output voltages from 1.6V~53V. Right now we offer 75W, 150W, 210W, 300W, 360W single output modules and 100W dual output modules to fulfill all kinds of applications up to 14 isolated outputs.

There are millions of combinations available for the Modular Series. Users can configure the DC outputs and get the fastest solution for their own power requirement with safety and EMC certificates. No NRE / safety application charges and long period of waiting for certificates! Providing standard products as usual, MEAN WELL offers you a revolutionary standard power solution that fulfills your custom-made request!

Output Configuration Guide





Features

- Millions of output configuration is available
- Universal AC input / Full range
- Built-in active PFC compliance to EN61000-3-2
- Built-in constant current limiting circuit for single output modules
- · Remote control on each output module
- Remote sense on each single output module (MS-75 / 150 / 210 / 300 / 360)
- Short circuit / Overload / Over voltage protections for all modules
- Parallel function for MS-210 (up to 5 units), MS-300/360 (up to 3 units)
- Margining control function (MS-210 / 360)
- · Cooling by built-in DC fan with fan alarm function
- · Additional 12V/0.1A auxiliary output for remote control
- · 3 years warranty

Model No.	MP450	MP650	MP1K0				
AC input voltage range	85~264VAC or 120~370VDC	5~264VAC or 120~370VDC					
Power Factor	PF >0.95 / 230VAC, PF > 0.98 / 115	VAC at full load					
AC inrush current (max.)	Cold start, 40A at 230VAC	Cold start, 50A at 230VAC	Cold start, 40A at 230VAC				
Max output voltage	450W	650W	1000W				
Efficiency (typical)	82.5%	84%	84%				
Over temperature protection	Output shutdown, auto-recovery						
Fan alarm	Output shutdown when fan malfuncti	ons					
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/F	P-FG: 0.5kVAC, 1 minute					
Working temperature	-20~+50°C@100%, +70°C @ 50% lo	ad					
Safety standards	UL62368-1, TUV BS EN/EN62368-1,	EAC TP TC 004 approved					
EMC standards	BS EN/EN55032 class B, EN61000-3-2,3,	EN61000-4-2,3,4,5,6,8,11, EN55024 light	industry level, criteria A, EAC TP TC 020				
Connection	Input side: 3P/10mm pitch terminal I	olock & JST B3B-XH					
Dimension (LxWxH)(mm)	254x 127x 63.5						



Modular Series



■ MS-75: 1-SLOT single output (75W max.)

Item Code	Output	* Peak I	Vdc adj.	Tol.	R&N.
L	3.3V, 0~15A	17.3A	2.6~4.0V	±2%	80mV
M	5V, 0~15A	17.3A	4.0~6.0V	±2%	80mV
N	12V, 0~6.3A	7.30A	9.0~13.2V	±1%	150mV
0	15V, 0~5.0A	5.80A	13.2~16.8V	±1%	150mV
Р	24V, 0~3.2A	3.70A	20.0~26.4V	±1%	150mV
Q	48V, 0~1.6A	1.80A	40.0~53.0V	±1%	250mV

■ MS-150: 1-SLOT single output (150W max.)

		150	30	1.5	
Item Code	Output	* Peak I	Vdc adj.	Tol.	R&N.
Α	2V, 0~25A	30.0A	1.6~2.6V	±3%	50mV
В	3.3V, 0~25A	30.0A	2.6~4.0V	±2%	80mV
С	5V, 0~25A	30.0A	4.0~6.0V	±2%	80mV
D	7.5V, 0~18A	20.7A	6.0~9.0V	±2%	100mV
E	12V, 0~13A	15.0A	9.0~13.2V	±1%	150mV
F	15V, 0~10A	11.5A	13.2~16.8V	±1%	150mV
G	18V, 0~8.5A	9.80A	16.8~20.0V	±1%	150mV
Н	24V, 0~6.5A	7.50A	20.0~26.4V	±1%	150mV
I	27V, 0~5.8A	6.70A	25.0~31.0V	±1%	150mV
J	33V, 0~4.7A	5.40A	30.0~40.0V	±1%	250mV
K	48V, 0~3.2A	3.68A	40.0~53.0V	±1%	250mV

■ MS-210: 1-SLOT parallelable single output (210W max.)

			amagic carele	/	1
Item Code	Output	* Peak I	Vdc adj.	Tol.	R&N.
1A	2V, 0~35A	38.5A	1.6~2.6V	±3%	50mV
1B	3.3V, 0~35A	38.5A	2.6~4.0V	±2%	80mV
1C	5V, 0~35A	38.5A	4.0~6.0V	±2%	80mV
1D	7.5V, 0~28A	32.2A	6.0~9.0V	±2%	100mV
1E	12V, 0~17.5A	20.1A	9.0~13.2V	±1%	150mV
1F	15V, 0~14A	16.1A	13.2~16.8V	±1%	150mV
1G	18V, 0~11.6A	13.4A	16.8~20.0V	±1%	150mV
1H	24V, 0~8.75A	10.1A	20.0~26.4V	±1%	150mV
1I	27V, 0~7.8A	9.00A	25.0~31.0V	±1%	150mV
1J	33V, 0~6.4A	7.40A	30.0~40.0V	±1%	250mV
1K	48V, 0~4.4A	5.10A	40.0~53.0V	±1%	250mV

■ MS-300: 2-SLOT parallelable single output (300W max.)

			0	,	,
Item Code	Output	* Peak I	Vdc adj.	Tol.	R&N.
2A	2V, 0~50A	57.5A	1.6~2.6V	±3%	80mV
2B	3.3V, 0~50A	57.5A	2.6~4.0V	±2%	80mV
2C	5V, 0~50A	57.5A	4.0~6.0V	±2%	80mV
2D	7.5V, 0~40A	46.0A	6.0~9.0V	±2%	100mV
2E	12V, 0~25A	29.0A	9.0~13.2V	±1%	150mV
2F	15V, 0~20A	23.0A	13.2~16.8V	±1%	150mV
2G	18V, 0~16.7A	19.2A	16.8~20.0V	±1%	150mV
2H	24V, 0~12.5A	14.4A	20.0~26.4V	±1%	150mV
21	27V, 0~11.2A	12.9A	25.0~31.0V	±1%	200mV
2J	33V, 0~9.1A	10.5A	30.0~40.0V	±1%	250mV
2K	48V, 0~6.3A	7.2A	40.0~53.0V	±1%	300mV

■ MS-360: 2-SLOT parallelable single output (360W max.)

Item Code	Output	⋆ Peak I	Vdc adj.	Tol.	R&N.
3A	2V, 0~60A	69.0A	1.6~2.6V	±3%	80mV
3B	3.3V, 0~60A	69.0A	2.6~4.0V	±2%	100mV
3C	5V, 0~60A	69.0A	4.0~6.0V	±2%	100mV
3D	7.5V, 0~48A	55.2A	6.0~9.0V	±2%	100mV
3E	12V, 0~30A	34.5A	9.0~13.2V	±1%	150mV
3F	15V, 0~24A	27.6A	13.2~16.8V	±1%	150mV
3G	18V, 0~20A	23.0A	16.8~20.0V	±1%	150mV
3H	24V, 0~15A	17.3A	20.0~26.4V	±1%	150mV
3I	27V, 0~13.4A	15.5A	25.0~31.0V	±1%	200mV
3J	33V, 0~11A	12.7A	30.0~40.0V	±1%	250mV
3K	48V, 0~7.5A	8.7A	40.0~53.0V	±1%	300mV

■ MD-100: 1-SLOT isolated dual output (100W max.)

Item Code	Output	Vdc adj.	Tol.	R&N.	Max.
R	5V, 2.0~10A	4.75~5.5V	±3%	100mV	90.0W
	5V, 0.0~8.0A	4.75~5.5V	±3%	100mV	
S	5V, 2.0~10A	4.75~5.5V	±3%	100mV	100.4W
	12V, 0.0~5.8A	11.4~13.2V	±3%	150mV	
Т	5V, 2.0~10A	4.75~5.5V	±3%	100mV	101.0W
	15V, 0.0~4.7A	14.2~16.5V	±3%	150mV	
U	24V, 0.5~3.0A	22.8~26.4V	±3%	200mV	100.0W
	5V, 0.0~10A	4.75~5.5V	±3%	100mV	
V	24V, 0.6~3.0A	22.8~26.4V	±2%	240mV	100.8W
	12V, 0.0~4.7A	11.4~13.2V	±3%	120mV	
W	12V, 1.0~5.0A	11.4~13.2V	±2%	120mV	100.8W
	12V, 0.0~5.8A	11.4~13.2V	±3%	120mV	
X	15V, 1.0~4.7A	14.2~16.5V	±2%	150mV	100.5W
	15V, 0.0~4.7A	14.2~16.5V	±3%	150mV	

⋆ Peak I: 35% duty cycle maximum within every 10 seconds. Average output power should not exceed the rated power.

Parallel Cont	nection Accessory
FAP-001 (For MS-300, 2 units)	
FAP-002 (For MS-300, 3 units)	8
FAP-003 (For MS-210, 2 units)	18 13
FAP-004 (For MS-210, 3 units)	
FAP-005 (For MS-210, 4 units)	2 2 2
FAP-006 (For MS-210, 5 units)	5 5 5 5 5
FAP-007 (For MS-360, 2 units)	133
FAP-008 (For MS-360, 3 units)	
Series Conn	ection Accessory
FAS-001 (For 1-slot modules: MS-75/150, MD-100)	
FAS-002 (For 2-slot modules: MS-300)	•
FAS-003 (For 1-slot modules: MS-210)	EE
FAS-004	<u>.</u>

▶ Please use MP450-CNPOQ, MP650-1A2EHU, MP1K0-2C2CEKL-1.....etc. as the order code. For more detail information about technical issues, please refer to the user manual.

(For 2-slot modules: MS-360)

▶ Please refer to the user manual for more detail information about parallel connection and the parallel codes. About series connection, please contact us or your local MEAN WELL distributor for more details.



19" Rack Power 1000~24000W Distributed Power







Features

- · Universal AC input / Full range
- · Built-in active PFC function
- · Built-in auxiliary power
- Protections: Short circuit / Overload / Over voltage / Over temperature
- · Forced air cooling by built-in DC fan
- · High power density up to 25W/inch3
- 1U low profile (41mm height)
- · Output voltage programmable; Constant current level Icc programmable
- Active current sharing up to 3 units, 3 racks max. can be operated in parallel (up to 8 units for RCP-1000, up to 15 units for RCP-1600)
- · Built-in remote ON/OFF control
- · Built-in remote sense function
- · AC OK and DC OK signal output
- · Internal OR-ing diode, hot-swap operation
- I²C serial data bus; Built-in PMBus serial communication
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

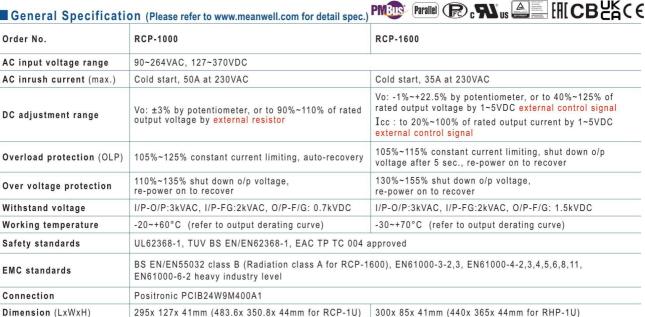

Order Information



Rectifier: RCP-1600- 12 - C	
Rack Shelf: RHP-1U I -A	: Standard model, PMBus protocol C: Optional model, CANBus protocol Output voltage(12V/24V/48V)
	For RCP-1600 I : AC inlet(IEC320-C14) T : Terminal block

DOD 4000 40 0

Rectifier — 1000W					
Model No.	Output	Tol.	R&N	Effi.	
RCP-1000-12	12V, 0~60A	±1%	150mV	81.0%	
RCP-1000-24	24V, 0~40A	±1%	200mV	87.0%	
RCP-1000-48	48V. 0~21A	±1%	300mV	89.0%	

Rectifier — 1600W				
Model No.	Output	Tol.	R&N	Effi.
RCP-1600-12	12V, 0~125A	±1%	150mV	88.5%
RCP-1600-24	24V, 0~67A	±1%	200mV	91.0%
RCP-1600-48	48V, 0~33.5A	±1%	300mV	93.0%



19" Rack Power 2000~18000W Distributed Power





Features

- Universal AC input / Full range(Withstand 300VAC surge for 5 seconds)
- · Built-in active PFC function
- · Built-in 5V/0.3A, 12V/0.8A auxiliary power
- Protections: Short circuit / Overload / Over voltage / Over temperature
- · Forced air cooling by built-in DC fan
- High power density 25W/inch³
- 1U low profile (41mm height)
- · Output voltage programmable
- · Active current sharing up to 3 units in one 19" rack, 3 racks max. can be operated in parallel (up to 9 units)
- · Built-in remote ON/OFF control
- · Built-in remote sense function
- · Internal OR-ing FET, hot-swap operation
- · Built-in PMBus serial communication
- · AC OK and DC OK signal, fan fail, OTP alarm signal
- · 5 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)




Order No.	RCP-2000
AC input voltage range	90~264VAC, 127~320VDC
AC inrush current (max.)	Cold start, 50A at 230VAC
DC adjustment range	Vo: -12%~+15% by potentiometer, or to 90%~110% of rated output voltage by 1.5~4.5VDC external control signal
Overload protection	105%~125% constant current limiting, shut down o/p voltage after 5 sec., re-power on to recover
Over voltage protection	120%~145% shut down o/p voltage, re-power on to recover
Setup, rise, hold up time	1500ms, 60ms, 10ms at full load and 230VAC
Withstand voltage	I/P-O/P:3kVAC, I/P-FG:2kVAC, O/P-F/G: 0.7kVDC
Working temperature	-40~+70°C (refer to output derating curve)
Safety standards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved
EMC standards	BS EN/EN55032 class A, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN61000-6-2 heavy industry level
Connection	Positronic PCIM34W13M400A1
Dimension (LxWxH)	295x 127x 41mm (483.6x 350.8x 44mm for RKP-1U)

* Rectifier - 2000W

Model No.	Output	Tol.	R&N	Effi.
RCP-2000-12	12V, 0~100A	±2%	150mV	86.0%
RCP-2000-24	24V, 0~80A	±1%	200mV	90.5%
RCP-2000-48	48V, 0~42A	±1%	300mV	92.0%

Order Information for RCP-2000 and RKP-1U

DC input voltage range 12~15VDC



Control and Monitor Unit for RCP-2000

₽K C €





Parallel Po c Sus Land State [HI CB LACE

- 1U low profile, rack mountable
- · Control and monitor up to 9 RCP-2000 units
- · Front panel LCD and buttons for on-site service without PC
- · Easy wire connections on rear side
- · Windows-based PC communication
- · USB, RS-232 or Ethernet interface for PC connection locally or remote monitoring and control via GSM modem
- · Alarm/event log with time and date · 4 user programmable relay outputs for traditional remote or warning
 - 5 years warranty

DC input current1A at 12VDC, 0.8A at 15VDC Output relay contact 4 user programmable relay Working temperature -25~+70°C (refer to output derating curve) Safety standards UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved for RKP-1U □ -CMU1 Withstand voltageI/P-O/P:3kVAC, I/P-FG:2kVAC, O/P-FG:0.7kVDC for RKP-1U□-CMU1; O/P-FG:0.7kVDC for RKP-CMU1 Isolation resistance I/P-O/P, I/P-FG, O/P-FG: 100M Ohms/500VDC for RKP-1U□-CMU1; O/P-FG:100M Ohms/500VDC for RKP-CMU1 BS EN/EN55032 class B, EN61000-3-2,3, EMC standards EN61000-4-2,3,4,5,6,8,11, EN61000-6-1 light industry level

Model No. Application RKP-CMU1 Control and monitor RCP-2000 series (single unit of RKP-CMU1) RKP-1U□-CMU1 Control and monitor RCP-2000 series (19" rack with RKP-CMU1)



19" Rack Power 3200W Programmable & Intelligent Distributed Power



3200W Programmable Power Supply

- · Universal AC Input/ Full Range
- High efficiency up to 94.5%
- PV (Programmable voltage) PC (Programmable constant current) functions
- · Built-in OR-ing MOSFET, support hot swap/plug
- · Active current sharing, up to 12.8W per rack, maximum of 128KW in total
- I2C interface, support PMBus protocol (CANBus optional)
- · Protections: Short circuit / Overload / Over voltage / Over temperature
- · Optional conformal coating
- · 5 years warranty

3U Rack Mountable Control and Monitor Unit

- and standalone configurations
- 7" TFT LCD Panel and buttons for easy on-site operation
- Ethernet port for on-site connection or remote access to enable on-line monitor and control over system
- 2 models, 3U 19-inch rackmount Support PMBus, CANbus, RS-485, and RS-232 as default communication interfaces
 - · Four user programmable relay outputs for conventional remote monitoring or warning
 - Web-based monitor/control UI provided
 - 5 years warranty


Parallel (R) c SU La CE (H) CB CACE



LRC€



Order Information



■ Features


- I catules	
AC input voltage range 9	90~264VAC; 127~370VDC
AC inrush current (max.) C	Cold start, 17A/230VAC
DC adjustment range 2	24V: 23.5-30V; 48V: 47.5-58.8V
Over voltage protection 2	24V: 31.5-37.5V; 48V: 63-75V
Withstand voltage	/P-O/P: 3KVAC; I/P-FG: 2KVAC; O/P-FG:
1	I.5KVAC (0.5KVAC for 24V)
Working temperature	30~+70°C (refer to output derating curve)
Safety standards	JL62368-1, TUV BS EN/EN62368-1, EAC TP
	ΓC 004 approved
EMC standards	Compliance with BS EN/EN55032
LWC standards	CISPR32) Conduction Class B, Radiation
Ċ	Class A; EN61000-3-2, -3-3, EAC TP TC
0	020,EN61000-4-2,3,4,5,6,8,11, EN61000-
	3-2
ConnectionF	Positronic PCIM34W13F400A1

Model No.	Output	Efficiency	
DRP-3200-24	24V, 0~133A	93.5%	
DRP-3200-48	48V. 0~67A	94.5%	

Description

CMU2 is a fully digitalized master controller that can execute tasks of monitoring and controlling over power system. CMU2 implements a 7" LCD touch panel to achieve intuitive operation, and developed a brand new web monitoring page for faster and smarter management . CMU2 not only being used to monitor the operating parameters and data of PSUs such as output voltage, output current, internal temperature, fan rpm, series number and firmware version, but also can be used to adjust output voltage and current. In addition, it can remotely control single PSU or entire power system through LAN or internet.

■ Order Information





Green Charger 30~326W Portable Battery Charger



30W Green Adaptor with Charging Function

- · Universal AC input / Full range Class II power (without earth pin)
- No load power consumption <1W
- Constant current and voltage (CC, CV mode)
- · High reliability
- · Suitable for high surge current equipment
- Protections: Short circuit / Overload / Over voltage / Over temp.
- 2 color LED indicator for charging status
- · Fully enclosed plastic case
- 2 years warranty

Ø:@s ≜ € [fl[CB F@ CK (€ GC30B GC30U GC30F

AC input voltage range 90~264VAC; 127~370VDC
Overload protection90%~110% constant current mode and over
300% pulsing mode
Over voltage protection 110%~135% rated output voltage
Withstand voltage I/P-O/P: 3kVAC, 1minute
Working temperature 0~+50°C (refer to output derating curve)
Safety standards UL62368-1, CSA 22.2, TUV BS EN/EN62368-1, EAC TP TC 004 approved
EMC standards BS EN/EN55014-1, EN61000-3-2,3,

EN61000-4-2,3,4,5,6,11, EAC TP TC 020 Length of output cable 120cm of UL1185, 16AWG for 4.2~8.4V 180cm of UL1185, 18AWG for 14.3~28.6V

Standard DC plug P1J: 2.1øx5.5øx11mm / C+, tuning fork type

Order No.	Output	R&N	Effi.
GC30 □-0P1J	4.2V, 0~4.00A	50mV	55%
GC30 □-1P1J	5.6V, 0~3.99A	50mV	70%
GC30 □-11P1J	7.2V, 0~3.00A	80mV	74%
GC30□-2P1J	8.4V, 0~3.00A	80mV	76%
GC30□-4P1J	14.3V, 0~2.09A	100mV	78%
GC30□-5P1J	16.8V, 0~1.60A	100mV	78%
GC30□-6P1J	28.6V, 0~1.04A	150mV	80%
□ = B / U / E ;	B: IEC320-C8, U: Amer	ican 2P, E: Eur	opean 2P

120W Green Adaptor with Charging Function



- · Universal AC input / Full range · Built-in active PFC function
- · High efficiency up to 91%
- · 2 stage charging characteristic
- · Cooling by free air convection
- · 3 pole AC inlet IEC320-C14 · Class I power (with earth pin)
- · Protections: Short circuit / Overload / Over voltage / Over temp.
- · Fully enclosed plastic case
- 2 color LED indicator for charging status
- · 2 years warranty

AC input voltage range	85~264VAC; 120~370VDC
Overload protection	90~110% constant current, auto-recovery
Over voltage protection	105%~135% shut down O/P voltage, re-power on
	to recover
Withstand voltage	I/P-O/P: 3kVAC
Working temperature	-30~+70°C (refer to derating curve)

Safety standardsUL1012 (GC120Axx-AD1 only), BS EN/EN62368-1, & GC220 S J62368-1 approved, EAC TPTC004

EMC standards BS EN/EN55032 class B, FCC part 15 class B, EAC TPTC020 EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11 Length of output cable120cm of UL2464, 18AWGx 4C

Standard DC plug Power DIN 4P with lock type (R7B)

167x 67x 35 mm

Model No.	Output	Effi.
GC120A12-□	13.6V, 7.5A	86.5%
GC120A24-□	27.2V, 4.42A	90.0%
GC120A48-□	54.4V, 2.21A	91.0%
□ = R7B / AD1 ;	R7B= 4 pin power din, AD1=	Anderson connector

160W Green Adaptor with Charging Function



175x 72x 35 mm

- · Universal AC input / Full range · Built-in active PFC function
- No load power consumption <1W
- · High efficiency up to 94%
- 2 stage charging characteristic
- Cooling by free air convection
- 3 pole AC inlet IEC320-C14
- · Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temp.
- · Fully enclosed plastic case
- · 2 color LED indicator for charging status
- 2 years warranty

AC input voltage range	. 85~264VAC; 120~370VDC
Overload protection	. 90%~110% constant current, auto-recovery
Over voltage protection	105%~135% rated output voltage, re-power on to recover
Withstand voltage	I/P-O/P: 3kVAC
Working temperature	30~+70°C (refer to derating curve)
Safety standards UL101:	2(GC160Axx-AD1 only), BS EN/EN62368-1, EAC TPTC004 approved
EMC standards	BS EN/EN55032 class B, FCC part 15 class B,
	EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TPTC020
Length of output cable	. 120cm of UL2464, 18AWGx 4C
Standard DC plug	. Power DIN 4P with lock type (R7B)

Model No.	Output	Effi.
GC160A12-□	13.6V, 10.0A	89.0%
GC160A24-□	27.2V, 5.89A	92.5%
GC160A48-□	54.4V, 2.95A	94.0%
☐ = R7B / AD1; R	7B= 4 pin power din, AD1=	Anderson connector

218W & 326W Green Adaptor with Charging Function



	GC220	GC330
Case (mm)	210x85x46	220x95x46
Connector	-	

- Universal AC input / Full range; 90~264VAC; 127~370VDC
- Built-in active PFC function
- No load power consumption <1W
- · 2 stage charging characteristic
- Cooling by free air convection
- 3 pole AC inlet IEC320-C14 Class I power (with earth pin)
- Protections:

Short circuit / Overload / Over voltage / Over temperature

- · Fully enclosed plastic case
- · 2 color LED indicator for charging status
- 2 years warranty

Overload protection90%~110% constant current, auto-recovery Over voltage protection 105%~135% rated output voltage, re-power on to recover Withstand voltage I/P-O/P: 3kVAC Working temperature-30~+60°C (refer to output derating curve)

Safety standards GC220: TUV BS EN/EN62368-1, UL1012 (GC220Axx-AD1 only), EAC TPTC004 approved

GC330: TUV BS EN/EN62368-1, UL62368-1, EAC TPTC004 approved EMC standards BS EN/EN55032 class B, FCC part 15 class B,EAC TPTC020,EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11

Length of output cable 100cm of UL2464, 16AWGx 4C Standard DC plug ...GC220: Power DIN 4P with lock type (R7B)

GC330: 4P/6.35mm pitch, AMP 1-480702-0 (power supply side);

AMP 1-480703-0 (customer side)

GC220 Series	•	*
Model No.	Output	Effi.
GC220A12-□	13.6V, 13.5A	89.0%
GC220A24-□	27.2V, 8A	92.5%
GC220A48-□	54.4V, 4A	93.0%
= R7B/ AD1;	R7B= 4 pin power din, A	AD1= Anderson connector

* GC330 Series

Model No.	Output	Effi.	
GC330A36-C4P	40.8V, 8A	93.5%	
GC330A48-C4P	54.4V. 6A	93.5%	



Charger 120~360W Power Supply and Programmable Portable Charger





■ Features

- Universal AC input / Full range
- Energy efficiency Level VI (ENP only)
- Comply with EISA 2007/DoE, NRCan, EU ErP and CoC Version 5 for ENP(EISA 2007/DoE, NRCan, EU ErP for ENP-360)
- Built-in defanult 3 stage charging curve, curve programmable with SBP-001(see page97,ENC only)
- Fanless design, no noise
- Protections: Short circuit / Overload (ENP only) / Over voltage / Over temperature
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

Order No.		ENP/ENC-120	ENP/ENC-180	ENP/ENC-240	ENP/ENC-360	
AC input vol	tage range	90~264VAC; 127 ~ 370VDC		1		
C inrush cu	urrent (max.)	Cold start, 65A at 230VAC	Cold start, 70A at 230VAC	Cold start, 75A at 230VAC	Cold start, 60A at 230VAC	
OC adjustme	nt range	12V: 11.5~15V, 24V: 23.5~	30V, 48V: 47.5~58.8V / 1	NA for ENC		
	Overload	110~125% constant curren	t limiting, auto-recovery	/ NA for ENC		
Protection Over voltage Over temp.		110~130% shut down and latch off o/p voltage, re-power on to recover				
		Shut down o/p voltage, auto-recovery after temperature goes down				
Withstand vo	oltage	I/P-O/P:3KVAC, I/P-FG:2KVAC, O/P-FG:0.5KVAC				
Working tem	perature	-30~+70°C (refer to output derating curve)				
Safety standards		UL62368-1, EAC TP TC 004; BSMI CNS14336-1(ENC series only);J62368-1(ENC-360-12 only)approved				
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11;FCC part 15				
Dimension (L	_xWxH)(mm)	192x 178x 45.5				

■ ENP-120	VI)	PC (U) us	[ficb fo	© CH (€	ENC-120	P C c Un us [A]	CBF© LKCE
Model No. ENP-120-12 ENP-120-24 ENP-120-48	Output 13.8V, 0~8.7A 27.6V, 0~4.3A 55.2V, 0~2.2A	Tol. ±1% ±1% ±1%	R&N 150mV 150mV 350mV	Effi. 89.5% 91% 91.5%	Model No. ENC-120-12 ENC-120-24 ENC-120-48	Output 14.4V, 0~8A 28.8V, 0~4A 57.6V, 0~2A	Effi. 89% 90% 90.5%
■ ENP-180	(VI)	Pc Uus	ERICB FO	S C K C E	ENC-180		CBF@ LKCE
Model No. ENP-180-12 ENP-180-24 ENP-180-48	Output 13.8V, 0~13A 27.6V, 0~6.5A 55.2V, 0~3.3A	Tol. ±1% ±1% ±1%	R&N 150mV 150mV 350mV	Effi. 91% 93.5% 94%	Model No. ENC-180-12 ENC-180-24 ENC-180-48	Output 14.4V, 0~12A 28.8V, 0~6A 57.6V, 0~3A	Effi. 91% 92% 93%
■ ENP-240	VI	P: Uus	ERICB FO	S CK CE	ENC-240		CBF© CKCE
Model No. ENP-240-12 ENP-240-24 ENP-240-48	Output 13.8V, 0~17.4A 27.6V, 0~8.7A 55.2V, 0~4.4A	Tol. ±1% ±1% ±1%	R&N 150mV 150mV 350mV	Effi. 91% 93.5% 94%	Model No. ENC-240-12 ENC-240-24 ENC-240-48	Output 14.4V, 0~16A 28.8V, 0~8A 57.6V, 0~4A	Effi. 91% 92% 93%
■ ENP-360	v	PC c (U) us	[fi[CBF@	© CA(€	ENC-360	(only for 12y) c (h) us [fill	CBF@ LK(E
Model No. ENP-360-12 ENP-360-24 ENP-360-48	Output 13.8V, 0~26A 27.6V, 0~13A 55.2V, 0~6.5A	Tol. ±1% ±1% ±1%	R&N 150mV 150mV 350mV	Effi. 91% 93% 94%	Model No. ENC-360-12 ENC-360-24 ENC-360-48	Output 14.4V, 0~24A 28.8V, 0~12A 57.6V, 0~6A	Effi. 91% 93% 94%

Charger

120W Portable Battery Charger





■ Features


- · Stationary charger for lead-acid batteries
- AC input range selectable by switch
- Protections: Short circuit / Overload / Over voltage / Over temperature
- 3 poles AC inlet with fuse holder
- 2 color LED loading indicator
- Open frame models available (without safety approvals)
- · 2 years warranty


The performance of NPB-120 is better than PA/PB-120.
It is highly recommended to use NPB-120 for all new project

General Specification (Please refer to www.meanwell.com for detail spec.)



	(passive) (13.6V/27.6V only)
Model No.	PA/B-120
AC input voltage range	88~132VAC/ 176~264VAC selectable by switch
AC inrush current (max.)	Cold start, 50A at 230VAC
Overload protection	90%~110% constant current limiting ,auto-recovery
Over voltage protection	108%~127% hiccup mode, auto-recovery
Setup, rise, hold up time	1000ms, 50ms, 16ms at full load and 230VAC
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC
Working temperature	-10~+45°C (refer to output derating curve)
Safety standards	UL60950-1, BS EN/EN60335-1, EN60335-2-29(except for 55.2V), EAC TP TC 004 approved
EMC standards	BS EN/EN55032 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, EAC TP TC 020
Dimension (LxWxH)(mm)	Case Type: 180x 96x 49; PCB Type: 144x 90x 33

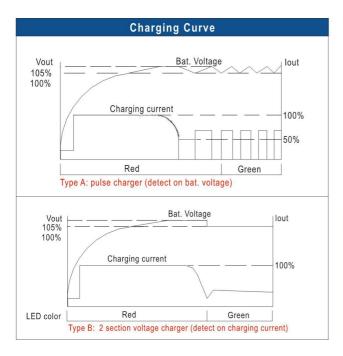



PA-120/PB-120						
Model No.	Output	Tol.	R&N	Effi.		
P□-120N-13 △	13.8V, 0~7.2A	±3~±8.5%	150mV	73%		
P□-120N-27 △	27.6V, 0~4.3A	±1~±8.0%	200mV	79%		
P□-120N-54 △	55.2V, 0~2.2A	±1~±7.5%	250mV	79%		
\square = A/B; Δ = P/C, P:Open Frame, C: With case						

Charger

300~1000W Stationary Battery Charger





■ Features for PB-300/360

- · 3 stage charger for lead-acid batteries and Li-ion batteries
- · AC input range selectable by switch
- · Passive PFC compliance to EN61000-3-2 class A

Reverse polarity / Short circuit / Over voltage / Over temperature

- · 2 color LED loading indicator
- · Fan ON/OFF control (PB-360 only)
- Fanless design(PB-300). built-in DC fan(PB-360)
- · 3 years warranty

■ Features for PB-600/1000

- 2/3/8 stage smart charger for lead-acid batteries and Li-ion batteries, microprocessor controlled power management CANBus potocol (optional for PB-1000)

- Active PFC function
- Battery rescue function
- Protections: Reverse polarity / Short circuit / Over voltage / Over temp.
- Temperature compensation function 2-bank charger (PB-1000)
- 3 color LED loading indicator
- Remote ON-OFF control
- Fan ON/OFF control (PB-600)
- · 3 years warranty

The size and performance of NPB-360/450/750/1200 are better than PB-300/360/600/1000. It is highly recommended to use NPB-360/450/750/1200 for all new project

■ General Specification (Please refer to www.meanwell.com for detail spec.)

			····· · · · · · · · · · · · · · · · ·		
Order No.	PB-300□	PB-360 □	PB-600 PB-1000		
AC input voltage range	90~132VAC / 180~264V	AC selectable by switch	90~264VAC; 127~370VDC		
Over voltage protection	108%~125% rated outpu	ut voltage 110%~125% rated output voltage			
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG:	S: 2kVAC, O/P-FG: 0.5kVAC (I/P-FG: 1.5kVAC for PB-360)			
Working temperature	-10~+50°C	-20~+60°C (refer to output derating curve)			
Safety standards	CB IEC60335-2-29 (exce UL62368-1 ,EAC TP TC		TUV BS EN/EN60335-1, EN60335-2-29 (except for 48V), EN62368-1(48V only), UL1012, EAC TP TC 004 approved	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved	
EMC standards	BS EN/EN55032 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3 (except for PB-300/360 non-PFC type), EAC TP TC 020			0 non-PFC type), EAC TP TC 020	
Dimension (LxWxH)(mm)	253x 135x 48.5 230x 158x 67 300x 184x 70			300x 184x 70	


c Sus [FI CB ■ PB-300 Model No. Output (20 min.) / (Continuous at 25°C) Effi. DD 200 12 14 41/ 20 854 / 12 5 1 950/

			(except for 4	8V) (P type only)
■ PB-360		c FL us	EHI CB	UK CE 8V) (P type only)
\square = P: with PFC; N:	non PFC			
PB-300□-48	57.6V, 5.3A	1	3.20A	88%
PB-300□-24	28.8V, 10.50A	1	6.25A	86%
PB-300LI-12	14.4 V, 20.03A	/	12.JA	03 /6

		(exception tot) (i type o
Model No.	Output	Effi.
PB-360□-12	14.4V, 24.3A	85%
PB-360□-24	28.8V, 12.5A	86%
PB-360□-48	57.6V, 6.25A	87%
□ = P: with PFC; N: non PFC		

■ PB-600 P c Tus EHI FRCE Effi. Model No. Output PB-600-12 14.4V, 0~40.0A 86% PB-600-24 28.8V, 0~21.0A 87% PB-600-48 57.6V, 0~10.5A 89%



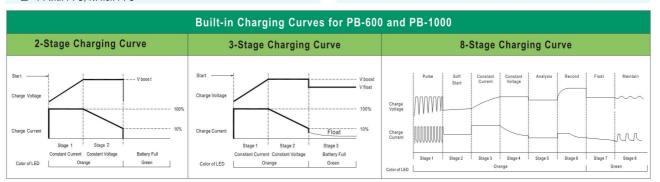



Charger 120~360W High Reliable Wide Output Range Battery Charger






■ Features

- · Comact size and wide output range charger
- Suitable for lead-acid and li-ion batteries
- Fanless design(NPB-120/240), fan spead control by thermal(NPB-360)
- · Charging voltage/current adjustable by VR
- 2 or 3 stage selectable by DIP S.W
- No load power consumption< 0.15W(AC S.W off)
- -30 ~+70 ℃ wide operating temperature

- · Protections:
- Short circuit / Over voltage /Over temperature / Battery reverse polarity protection
- · comply with 62368-1+ 60335-1/-2-/29 dual certification
- · Multiple standard output connectors
- · 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		NPB-120	NPB-240	NPB-360		
AC input voltage range		90~264VAC;127~370VDC		·		
Charging voltage Adj.range		14.4V:10.5~15.2V,28.8V:21~30	0.4V,57.6V: 42~60.8V by VR			
Charging current Adj.range		50~100% rated output curren	t by VR			
	DC o/p short	Constant current limiting, charg	er will shutdown after 5 sec,re-pov	ver on to recover		
D	Over voltage	105~132% shut down and latch off o/p voltage,re-power on to recover				
Protections	Over temp.	Shut down o/p voltage,recovers automatically after temperature goes down				
	Reverse polarity	By internal fuse open				
Withstand vo	Itage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC				
Working tem	perature	-30~+70°C (refer to output der	ating curve)			
Safety standards		CB IEC62368-1,IEC60335-2-29, DEKRA BS EN/EN62368-1,BS EN/EN60335-1-2-29, UL62368-1, EAC TP TC 004 approved				
EMC standards		BS EN/EN55032 classB,BS EN55014-1,BS EN/EN61000-3-2,3,BS EN/EN61000-4-2,3,4,5,6,8,11,EAC TPTC020				
Dimension (LxWxH)(mm)		180x 96x 49				

Model No. Output Effi

Model No.	Output	Effi.
NPB-120-12□	14.4V(10.5~15.2V), 6.8A	86.5%
NPB-120-24□	28.8V(21~30.4V), 4.0A	89.0%
NPB-120-48□	57.6V(42~60.8V), 2.0A	90.5%
□ = XLR; AD1;TB		

■ 240W NPB-240

Model No.	Output	Effi.	
NPB-240-12□	14.4V(10.5~15.2V), 13.5A	88.5%	
NPB-240-24□	28.8V(21~30.4V), 8.0A	92.0%	
NPB-240-48□	57.6V(42~60.8V), 4.0A	92.5%	
□ = XI R: AD1:TR			

			-			
360W	N	٩ŀ	νЕ	3-3	36	Ю

Model No.	Output	Effi.	
NPB-360-12□	14.4V(10.5~15.2V), 20A	87.0%	
NPB-360-24□	28.8V(21~30.4V), 12A	91.0%	
NPB-360-48□	57.6V(42~60.8V), 6A	92.0%	
□ = XLR: AD1:TB			

Functions				
Charging stage Adj	lo Adj	Vo Adj		
2 or 3 stage Adj. by DIP S.W	50~100% rated current adjustable by VR	14.4V(10.5~15.2V) 28.8V(21~30.4V) 57.6V(42~60.8V) by VR		





Charger

450~1700W Hight Reliable Intelligent Battery Charger





Features

- · Intelligent auto ranging with wide charging voltage
- Digital/manual setting for 2/3 stage or charging curve along with SBP-001(see page 97)
- Built-in CANBus interface for control and monitor
- Charging current adjustable 50~100% by VR
- -30 ~+70 C wide operating temperature
- Multiple Protections:

Short circuit / Over voltage / Over temperature/
Battery under voltage/Battery reverse polarity(No damage)


- Charging OK and battery full signal detect by TTL
- · Remote ON-OFF control
- Temperature compensation function to prolong battery life
- · Thermal-controlled DC fan
- Suitable for lead-acid (Pb) and li-ion batteries.
- Comply with 62368-1+60335-1/-2-29 dual certification
- Pull handle accessory available (Order NO.:carry handle,sold separately)
- · 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model		NPB-450	NPB-750	NPB-1200	NPB-1700		
AC input vo	oltage range	90~264VAC; 127 ~ 370VDC		'	'		
Charge vol	tage range	14.4V: 10.5~21V, 28.8V: 21~	-42V, 57.6V: 42~80V , 72V: 5	4~100V(72V for NPB-450 only	у)		
	DC O/P short	Constant current limiting, ch	arger will shut down after 5	sec.,re-power on to recover			
Duntantiana	Over voltage	103~125% shut down and latch off o/p voltage, re-power on to recover					
Protections	Over temp.	Shut down O/P voltage, recovers automatically after temperature goes down					
	Reverse polarity	Protected internal reverse detection, NO damage,re-power on to recover after conduction is removed					
Withstand	voltage	I/P-O/P:3KVAC, I/P-FG:2KVAC, O/P-FG:0.5KVAC					
Working te	mperature	-30~+70°C (refer to output derating curve)					
Safety standards		CB IEC6238-1 and IEC 60335-1/2-29, DEKRA BS EN/EN62368-1 and BS EN/EN60335-1/2-29, UL 62368-1, EAC TP TC 004 approved					
EMC standards		BS EN/EN 55032,BS EN/EN 61000-3-2,3; BS EN/EN 61000-4-2,3,4,5,6,8,11 ,EAC TP TC 020; EN55014-1(NPB-450/750 only)					
Dimension (LxWxH)(mm)		205x 130x 55	230x 158x 67	250x 158x 67	300x 184x 70		

450W		NPB-450	1200W		NPB-1200
Model No.	Output	Effi.	Model No.	Output	Effi.
NPB-450-12	14.4V(10.5~21V), 0~25A	92%	NPB-1200-12	14.4V(10.5~21V), 0~70A	91%
NPB-450-24	28.8V(21~42V), 0~13.5A	93%	NPB-1200-24	28.8V(21~42V), 0~36A	92%
NPB-450-48	57.6V(42~80V), 0~6.8A	93%	NPB-1200-48	57.6V(42~80V), 0~18A	93%
NPB-450-72	72V <mark>(54~100V)</mark> , 0~5.5A	93%	NF B-1200-40	37.0V(42 00V), 0 10A	9370
750W		NPB-750	■ 1700W		NPB-1700
Model No.	Output	Effi.	Model No.	Output	Effi.
NPB-750-12	14.4V(10.5~21V), 0~43A	92%	NPB-1700-12	14.4V(10.5~21V), 0~85A	91%
NPB-750-24	28.8V(21~42V), 0~22.5A	93%	NPB-1700-24	28.8V(21~42V), 0~50A	92%
NPB-750-48	57.6V(42~80V), 0~11.3A	93%	NPB-1700-48	57.6V(42~80V), 0~25A	93%

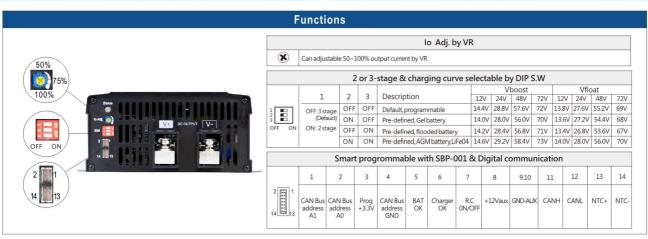

Charger 450~1700W Hight Reliable Battery Charger & Power Supply 2-in-1



NPP-1200




■ Features

- Mulit-function-battery charger or power supply operation mode selectable
- · Output voltage and current adjustable via VR
- · 3-stage chargng curve for chargng mode
- -30~70 C wide operating temperature
- · Multiple Protections:

Short circuit / Over voltage / Over temperature

- · Remote ON-OFF control
- · Thermal controlled DC fan
- Suitable for lead-acid(Pb)batteries
- Comply with 62368-1+60335-1/-2-29 dual certification
- Pull handle accessory available (Order NO.:carry handle,sold sparately)
- · 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)

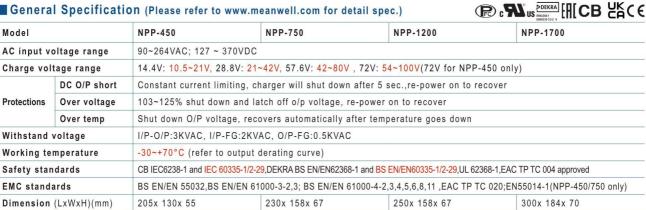

1200W

450W		NPP-45
Model No.	Output	Effi.
NPP-450-12	14.4V(10.5~21V), 12.5~25A	92%
NPP-450-24	28.8V(21~42V), 6.75~13.5A	93%
NPP-450-48	57.6V(42~80V), 3.4~6.8A	93%
NPP-450-72	72V(54~100V), 2.75~5.5A	93%

Output	ETTI.	Model No.	Output	ETTI.
4.4V <mark>(10.5~21V)</mark> , 12.5~25A	92%	NPP-1200-12	14.4V <mark>(10.5~21V)</mark> ,35~70A	91%
3.8V <mark>(21~42V)</mark> , 6.75~13.5A	93%	NPP-1200-24	28.8V(21~42V), 18~36A	92%
7.6V <mark>(42~80V)</mark> , 3.4~6.8A	93%	NPP-1200-48	57.6V(42~80V), 9~18A	93%
2V <mark>(54~100V)</mark> , 2.75~5.5A	93%	NFF-1200-40	37.0V(42-00V), 9-10A	93 //
	NDD_750	1700W		NPP-1700

■ 750W		NPP-750
Model No.	Output	Effi.
NPP-750-12	14.4V <mark>(10.5~21V)</mark> ,21.5~43A	92%
NPP-750-24	28.8V(21~42V), 11.25~22.5A	93%
NPP-750-48	57 6V(42~80V) 5 65~11 3A	93%

■ 1700W		NPP-1700
Model No.	Output	Effi.
NPP-1700-12	14.4V(10.5~21V), 42.5~85A	91%
NPP-1700-24	28.8V(21~42V), 25~50A	92%
NPP-1700-48	57.6V(42~80V), 12.5~2.5A	93%

NPB vs. NPP Series

Functions Series	Mounting style	Product level	2 or 3 stage	Vo Adj.	lo Adj.	Buit-in CAN Bus	O/P connector	Built- in Fan	Dimenion (LxWxH,mm)
NPB-120 NPB-240 NPB-360	Portable	Basic	Adj.by DIP S.W	Adj.by VR 14.4V:10.5~15.2V 28.8V:21~30.4V 57.6V:42~60.8V		×	T.B Anderson XLR	×	180x 96x 49
NPB-450 NPB-750 NPB-1200 NPB-1700	Screw	Intelligent	Adj.by DIP S.W or SBP-001 with N.B	Auto ranging or SBP-001 14.4V:10.5~21V 28.8V:21~42V 57.6V:42~80V 72V:54~100V(450W only)	Adj.by VR 50~100%	√	- Т.В	$oxed{\int_{\mathcal{A}}}$	205x 130x 55 230x 158x 67 250x 158x 67 300x 184x 70
NPP-450 NPP-750 NPP-1200 NPP-1700	Mounted	Advanced	3-stage only	Adj.by VR 14.4V:10.5~21V 28.8V:21~42V 57.6V:42~80V 72V:54~100V(450W only)		×		v	205x 130x 55 230x 158x 67 250x 158x 67 300x 184x 70



Model

Charger 1600W Stationary & Rack Type Programmable Charger





■ Features

- Intelligent charger with programmable 3 stage curve for lead-acid batteries and Li-ion batteries
- · Universal AC input / Full range
- · Withstand 300VAC surge input for 5 seconds
- Built-in I²C interface, PMBus protocol (optional CANBus)
- 1U low profile (41mm height)
- Rack mountable (RCB-1600), support hot swap (hot plug)
- · Output voltage and current programmable
- · Forced air cooling by built-in DC fan
- · Built-in OR-ing FET
- · Active current sharing up to 4800W (2+1) for RPB-1600, 8000W with one 19" rack shelf (RHP-1U -A)for RCB-1600
- Protections: Battery under voltage / Battery no connection / Short circuit / Over voltage / Over temperature
- 3 color LED loading indicator
- · Optional conformal coating
- 5 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)


RPB-1600



AC input voltage range	90 ~ 264VAC; 127 ~ 370VDC			
AC inrush current (max.)	Cold start, 35A at 230VAC	Cold start, 35A at 230VAC		
DC adjustment range	Vo: -1%~+22.5% by potentiometer, or to 75%~125% of nominal output voltage by 1~5VDC external control signal Io: to 20%~100% of rated output current by 1-5VDC external control signal			
Over voltage protection	30%~155% shut down o/p voltage, re-power on to recover			
Working temperature	-30~+70°C (refer to output derating curve)			
Withstand voltage	I/P-O/P:3KVAC, I/P-FG:2KVAC, O/P-FG:1.5KVAC			
Safety standards	UL60950-1, TUV BS EN/EN60950-1, EAC TP TC 004 appro	UL60950-1, TUV BS EN/EN60950-1, EAC TP TC 004 approved		
EMC standards	BS EN/EN55032 conduction class B, radiation class A; EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11; EN61000-6-2 heavy industry level criteria A, EAC TP TC 020			
Connection	Bus Bar	Positronic PCIM34W13M400A1		
Dimension(LxWxH)(mm)	300x 85x 41			

1600W		RPB-1600
Model No.	Output	Effi.
RPB-1600-12	14.4V, 0~100A	91.0%
RPB-1600-24	28.8V, 0~55A	92.5%
RPB-1600-48	57.6V, 0~27.5A	93.5%

1600W		RCB-1600
Model No.	Output	Effi.
RCB-1600-12	14.4V, 0~100A	90.5%
RCB-1600-24	28.8V, 0~55A	92.0%
RCB-1600-48	57.6V, 0~27.5A	93.0%



Model	Description	Vboost	Vfloat	CC (default)
	Default programmable	14.4	13.8	
12V	Pre-defined, gel battery	14	13.6	100A
IZV	Pre-defined, flooded battery	14.2	13.4	TOUA
	Pre-defined, AGM battery	14.5	13.5	
	Default programmable	28.8	27.6	
	Pre-defined, gel battery	28	27.2	55A
24V	Pre-defined, flooded battery	28.4	26.8	
	Pre-defined, AGM battery	29	27	
	Default programmable	57.6	55.2	
4007	Pre-defined, gel battery	56	54.4	27.5A
48V	Pre-defined, flooded battery	56.8	53.6	27.5A
	Pre-defined, AGM battery	58	54	



Charger 3200W Stationary & Rack Type Programmable Charger






■ Features

- · Universal AC Input / Full Range
- · Charger for lead-acid (Gel, flooded and AGM) and Li-ion (Li-ion & Lithium Manganese) batteries
- Built-in default 3 stage charging curve and curve programmable with SBP-001(see page 97)
- · High efficiency up to 94.5%
- · High power density 37W/in3
- · Cooling by built-in DC fan
- PV (Programmable Voltage)and PC (Programmable Constant
- · Built-in OR-ing MOSFET, support hot swap/plug (DBR-3200
- · Active current sharing, one 19" 1U rack up to 12800W, two racks up to 25600W in parallel
- I²C interface, support PMBus protocol (CANBus optional)
- Protections: Battery under voltage / Battery no connection / Short circuit / Over temperature / Over voltage
- · Optional conformal coating
- · 5 years warranty

Order Information

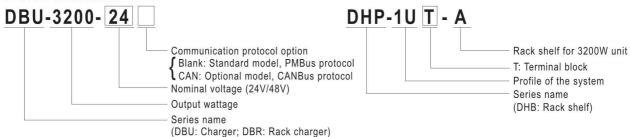

■ General Specification (Please refer to www.meanwell.com for detail spec.)



3200W		DBU-3200	3200W		DBR-3200
Model No.	Output	Efficiency	Model No.	Output	Efficiency
DBU-3200-24	28.8V, 0~110A	93.5%	DBR-3200-24	28.8V, 0~110A	93.5%
DBU-3200-48	57.6V, 0~55A	94.5%	DBR-3200-48	57.6V, 0~55A	94.5%

Charger

Smart Battery Charging Programmer





■ Features

- For MEAN WELL's intelligent battery chargers:
 Charging curve programmable suitable for models:
 ENC-120/240/360,NPB-450/750/1200/1700,DRS-240/480,
 HEP-1000,HEP-2300-55,RPB/RCB-1600,DBU/DBR-3200
- Simple connection and configuration
- · No need of external battery or AC power
- · LED status indicator

General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	SBP-001		
Programming interface	PMBus, CANBus, UART		
LED indicator	Green: 3.3V interface Orange: 5V interface		
Programming volt.	V and 3.3V, for programming purpose only. Total 0.5W(max.)		
Comm. interface	USB		
Working temperature	0~ +40°C		
Dimension (LxWxH)(mm)	165x 46x 23		

Description

The Smart Battery Charging Programmer Software is utilized for programming MEAN WELL's intelligent chargers, including ENC-120/240/360, NPB-450/750/1200/1700, DRS-240/480, HEP-1000, HEP-2300-55, RPB/RCB-1600, DBU/DBR-3200. The connection between personal computer (PC) and charger is established via the "programmer" hardware interface from MEAN WELL.

What function is provided?

Charging parameter adjustment: Values of constant current (CC), constant voltage (CV), float voltage (FV) and tapper current (TC) can be set and adjusted.

Battery temperature compensation: Various charging voltage compensation is provided for battery at different temperature conditions. Timeout setting: Fully programmable timeout during stages enables to be set to shutdown the charger to prevent battery over-charge.

■ Hardware Connection


Prior to program a driver, the connection between driver and PC must be established first via the Programmer shown in the figure below. The following steps are suggested:

ENC series with SBP-001:

- 1.Remove the ENC from AC.
- 2.Connect Programmer and PC with the enclosed USB cable. LED (Green) of the Programmer is ON.
- 3. Connect the communication cable to CN31 of the ENC from the Programmer.

RPB/RCB & DBU/DBR series with SBP-001:

- 1.Remove the RPB/RCB & DBU/DBR from AC.
- 2. Connect Programmer and PC with the enclosed USB cable. LED (Green) of the Programmer is ON.
- 3.Connect the communication cable to CN1 and CN500 of the RPB/DBU from the Programmer; RCB/DBR requires working with a RHP/DHP rack, link the cable to JK1 of the rack.
- 4. Apply AC to the charger.
- 5. LED of the Programmer will light in Orange once connection is established successfully.

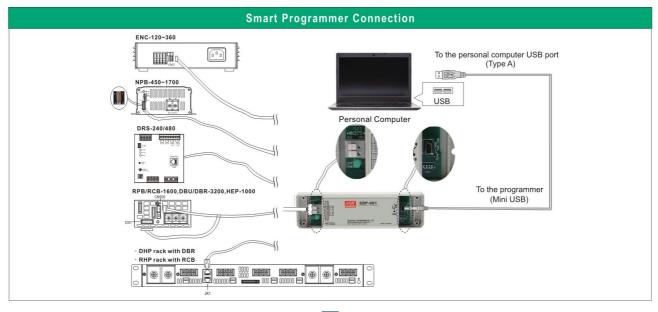



Charger & Bidirectional power supply



600W Harsh Environment Programmable Charger

- 3 stage charger for lead-acid batteries and Li-ion batteries in harsh environment
- Universal AC input 90~305VAC
- · Built-in active PFC function
- No load power consumption
 <0.5W at remote OFF
- High efficiency up to 96%
- Fanless design, cooling by free air convection
- -40~+70°C wide operating range
- Aluminum case and filling with heat-conducted silicone

- Withstand 10G vibration test
- Operating altitude up to 5000 meters
- Vo and lo can be adjusted through internal potentiometer
- Protections:
 Short circuit / Over voltage /
 Over temperature
- Temperature compensation function
- · 6 years warranty

2200W AC⇒DC Bidirection Power with Energy Recyle

- 93% efficiency for both AC/DC and DC/AC conversion
- Ultrafast switching time of 1ms
 (Fast responds & energy recycle)
- Active current sharing up to 11000W with 4+1 units
- THDi <3%
- CB/TUV/UL 62368-1 certified; design refer to IEC 62477-1 regulation(By request)
- · Optional CANBus protocol
- Protections:
 Anti-islanding / AC fail / DC
 Over voltage / Overload /

Over current / Over

temperature
• 5 years warranty

Parallel Pc Sus A FILL CBUSCE



DC adjustment range	12V: 12Vdc~15Vdc
	24V: 24Vdc~28Vdc
4	48V: 48Vdc~65Vdc
9	96V: 96Vdc~112Vdc
DC to AC current 1	12V: 150Adc, 24V: 75Adc, 48V: 37.5Adc
Ş	96V:18.5Adc
DC to AC Effi	12V: 90.5%(@112.5A), 24V: 93%(@56.3A)
4	48V: 93%(@28.1A), 96V: 93%(@13.9A)
AC range	180~264VAC
AC to DC current 1	12V: 180Adc, 24V: 90Adc, 48V: 45Adc,
9	96V:22.5Adc
AC to DC Effi	12V: 90%(@135A), 24V: 93%(@67.5A)
2	48V: 93%(@33.75A), 96V: 93%(@16.9A)
AC ← DC switch time	1ms
Safety standards l	JL62368-1, CAN/CSA C22.2 No.62368-1,
1	TUV BS EN/EN62368-1, EAC TP TC 004,
I	EC62477-1(by request) approved
EMC standards	Compliance with BS EN/EN55032(CISPR32)
(Conduction ClassB,Radiation Class A;
E	EN61000-3-2,3; EN61000-4-2,3,4,6,8,11;
Force charging and discharging [EN-61000-6-2,EAC TP TC 020

Model No.	Output	Effi.
BIC-2200-12	12V, 0~180A	90%
BIC-2200-24	24V, 0~90A	93%
BIC-2200-48	48V, 0~45A	93%
BIC-2200-96	96V, 0~22.5A	93%

Optional CANBus protocol





AC input voltage range	85~264VAC; 120~370VDC
AC inrush current (max.)	Cold start, 70A at 230VAC
DC adjustment range	Vo: 100%~125% rated output voltage
Overload protection	135%~152% shut down o/p voltage,
	re-power on to recover
Withstand voltage	I/P-O/P: 3.75kVAC, I/P-FG: 2kVAC, O/P-FG:
	1.5kVAC
Working temperature	-40~+70°C (refer to output derating curve)
Safety standards	UL62368-1 TUV BS EN/EN62368-1, EAC TP
	TC 004 approved
EMC standards	BS EN/EN55032 conduction class B,
	radiation class A; EN61000-3-2,3,
	EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020
Connection	3+7P / 11mm pitch terminal block with cover

Model No.	Output	Effi.	
HEP-600C-12	14.4V, 0~35.0A	93.5%	
HEP-600C-24	28.8V, 0~21.0A	94.5%	
HEP-600C-48	57.6V, 0~10.5A	95.5%	

DC/AC Inverter 250~400W High Reliable Built-in Type True Sine Wave





■ Features

- True sine wave output (THD<3%)
- 200% high surge power for heavy load
- Fanless design, no noise
- AC output voltage and frequency selectable by DIP S.W
- No load disspation <1.5W max. at standby saving mode
- -20~+70°C wide operating temperature
- Power ON-OFF remote control

• Protections:

DC Input:Reverse polarity / DC low alarm / DC low shutdown /Over voltage / Battery over discharge protection AC Output: Short circuit / Overload / Over temp.

- Support Tx/Rx for monitoring power inverter status
- Suitable for lead-acid or li-ion batteries
- · Conformal coating
- 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No. NTS-250P		NTS-250P	NTS-400P			
Rated Power(Cont	inuos)	250W	400W			
Surge Power (30 Cycles.) 500W 800W			800W			
DC input rated voltage 12V, 24V, 48V						
10 ()		110 Vac model: 100 / 110 / 115 / 120 Vac sele	110 Vac model: 100 / 110 / 115 / 120 Vac selectable by DIP S.W			
AC output voltage		230 Vac model: 200 / 220 / 230 / 240 Vac selectable by DIP S.W				
Output frequency	1	50 / 60Hz selectabe by DIP S.W				
AC output waveform		True sine wave (THD<3%)				
AC output regulation		±3.0% at rated input voltage				
No load dissipati	on	Saving mode default disable, ≤1.2W ~ 1.5W by models @ auto detec AC output load ≤10W will be changed to saving mode				
Working tempera	ture	-20 ~ +70°C(Refer to "Derating curve")				
0.6.6	110 Vac	CB IEC62368-1 approved	CB IEC62368-1 approved			
Safety standard 230 Vac		CB IEC62368-1,E13,EAC TPTC004,AS/NZS 62368.1 approved				
5M0 - t l l-	110 Vac	FCC	FCC			
EMC standards	230 Vac	BS EN/EN55032, EN61000-4-2.3.8 , EAC TPTC020				

■ 250W				NTS-250P	400W			N ⁻	TS-400P
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.	Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTS-250P-112P	250W	10.0-16.5	110 / 60	91%	NTS-400P-112	400W	10.0-16.5	110 / 60	89%
NTS-250P-124P	250W	20.0-33.0	110 / 60	91%	NTS-400P-124	400W	20.0-33.0	110 / 60	91%
NTS-250P-148P	250W	40.0-66.0	110 / 60	92%	NTS-400P-148	400W	40.0-66.0	110 / 60	91%
NTS-250P-212P	250W	10.0-16.5	230 / 50	92%	NTS-400P-212	400W	10.0-16.5	230 / 50	91%
NTS-250P-224P	250W	20.0-33.0	230 / 50	93%	NTS-400P-224	400W	20.0-33.0	230 / 50	93%
NTS-200P-248P	250W	40.0-66.0	230 / 50	93%	NTS-400P-248	400W	40.0-66.0	230 / 50	93%

	AC Stocket Type							
MODEL	100~120Vac model			200~240Vac model				
Socket type								
	TYPE-US	TYPE-GFCI	TYPE-UN	TYPE-EU	TYPE-CN	TYPE-UK	TYPE-AU	TYPE-UN
	In stock	Optional	In stock	In stock	In stock	Optional	Optional	In stock
Country	USA	USA	UNIVERSAL	EUROPE	CHINA	U.K	AUSTRALIA	UNIVERSAL



DC/AC Inverter 300~750W High Reliable True Sine Wave





■ Features

- · Compact size and light weight
- True sine wave output (THD<3%)
- 200% high surge power for heavy load
- AC output voltage and frequency selectable by DIP S.W
- No load disspation <1.5W max. at standby saving mode
- -20 C ~+70 C wide operating temperature
- · Power ON-OFF remote control
- · Remote controller

(IRC1,IRC2IRC3,accessory sold separately)for NTS-750

- · Protections :
 - DC Input: Reverse polarity / DC low alarm / DC low shutdown / Over voltage / Battery over discharge protection AC Output: Short circuit / Overload / Over temp
- Support RS-232 communication
 (Communication cable order NO.:RJ11-RS232,sold sperately)
- Suitable for lead-acid or li-ion batteries
- Conformal coating
- Pull handle accessory available (Order NO.:carry handle,sold sperately)



General Specification (Please refer to www.meanwell.com for detail spec.)						
Model No.		NTS-300	NTS-450	NTS-750		
Rated Powe	er(Continuos)	300W	450W	750W		
Surge Powe	er (30 Cycles.)	600W	900W	1500W		
DC input ra	ated voltage	12V, 24V, 48V				
AC output voltage		110Vac model: 100 / 110 / 115 / 120Vac selectable by DIP S.W 230Vac model: 220 / 220 / 230 / 240Vac selectable by DIP S.W				
Output free	quency	50/60Hz selectable by DIP S.W				
AC output waveform		True sine wave (THD<3%)				
AC output	regulation	±3.0% at rated input voltage				
No load dis	ssipation	Saving mode default disable,≤1.2W ~ 1.5W by models @ auto detec AC output load≤10W will be changed to saving mode				
Working te	emperature	-25 ~ +65°C(Refer to "Derating curve") -25 ~ +70°C(Refer to "Derating curve")				
Safety	110Vac Model	CB IEC62368-1(Expect for UN Type),Dekr	a BS EN/EN62368-1(Expect for GF	CI/UN-Type), UL458(750W only) approved		
standard	230Vac Model	CB IEC62368-1(Expect for UN Type),Dekr	CB IEC62368-1(Expect for UN Type), Dekra BS EN/EN62368-1(Expect for UN-Type)E13, EAC, AS/NZS62368.1 approved			
EMC	110Vac Model	FCC (Expect for UN-Type)				
EMC	230Vac Model	BS EN/EN55032, EN61000-4,2,3,8; EAC TP TC020(Expect for UN-Type)				

■ 300W				NTS-300
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTS-300-112 🔲	300W	10.0-16.5	110 / 60	90%
NTS-300-124 🗌	300W	20.0-33.0	110 / 60	92%
NTS-300-148	300W	40.0-66.0	110 / 60	92%
NTS-300-212	300W	10.0-16.5	230 / 50	92%
NTS-300-224	300W	20.0-33.0	230 / 50	93%
NTS-300-248 □	300W	40.0-66.0	230 / 50	93%

■ 450W				NTS-450
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTS-450-112 🗆	450W	10.0-16.5	110 / 60	89%
NTS-450-124 🗌	450W	20.0-33.0	110 / 60	90%

Model No.	Continue power	I nput (Vdc)	Output (Vac / Hz)	Effi.
NTS-450-148	450W	40.0-66.0	110 / 60	91%
NTS-450-212	450W	10.0-16.5	230 / 50	90%
NTS-450-224	450W	20.0-33.0	230 / 50	93%
NTS-450-248	450W	40.0-66.0	230 / 50	93%
				NITO TE

/50W				N15-75
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTS-750-112 🔲	750W	10.0-16.5	110 / 60	89%
NTS-750-124 🗌	750W	20.0-33.0	110 / 60	90%
NTS-750-148 🗌	750W	40.0-66.0	110 / 60	91%
NTS-750-212	750W	10.0-16.5	230 / 50	90%
NTS-750-224	750W	20.0-33.0	230 / 50	93%
NTS-750-248	750W	40.0-66.0	230 / 50	93%

□ = AC output socket; Type US/GFCI/UN for 110Vac models, Type-EU/CN/UK/AU/UN for 230Vac models; please refer to page 99

AC Output Voltage、 Frequency、 Power saving mode selectable by DIP SW						
SW1	SW2	SW3	SW4			
OFF	OFF: 100Vac or 200Vac	ON S FOLLS	ON - 0			
OFF	ON: 110Vac or 220Vac	ON:50Hz	ON: Saving mode			
ON	OFF: 115Vac or 230Vac	OFF: 60Hz	OFF: Non-Saving mode			
ON	ON: 120Vac or 240Vac	OFF. BUHZ	Of F. Non-Saving mode			





DC/AC Inverter 1200~3200W High Reliable True Sine Wave





■ Features

- · Compact size and light weight
- True sine wave output (THD<3%)
- 200% high surge power for heavy load
- · AC output voltage and frequency selectable by DIP S.W
- No load disspation <1.5W max. at standby saving mode
- -25 C ~+70 $^{\circ}$ C wide operating temperature
- · Power ON-OFF remote control

110Vac Model

230Vac Model

EMC

· Remote controller (IRC1, IRC2IRC3, accessory sold separately)

- · Protections:
- DC Input: Reverse polarity / DC low alarm / DC low shutdown /
 Over voltage Battery over discharge protection
- AC Output: Short circuit / Overload / Over temp · Support RS-232 communication
- (Communication cable order NO.:RJ11-RS232,sold sperately)
- · Suitable for lead-acid or li-ion batteries
- · Conformal coating
- Pull handle accessory available (Order NO.:Carry handle,sold sperately)
- · 3 years warranty

Model No		NTS-1200	NTS-1700	NTS-2200	NTS-3200		
Rated Pow	er(Continuos)	1200W	110Vac:1500W,230Vac:1700W	2200W	110Vac:3000W,230Vac:3200W		
Surge Pow	er (30 Cycles.)	2000W	110Vac:3000W,230Vac:3400W	4400W	110Vac:6000W,230Vac:6400W		
DC input r	ated voltage	12Vdc, 24Vdc or 48Vdc					
AC output	voltage	110Vac model: 100 / 110 / 1	15 / 120Vac selectable by DIP S.W ,	230Vac model: <mark>200 / 22</mark>	0 / 230 / 240Vac selectable by DIP S.W		
Output frequency 50/60Hz selectable by DIP S.W							
AC output	waveform	True sine wave (THD<3%)				
AC output	regulation	±3.0% at rated input voltage					
No load di	ssipation	Saving mode default disable,≤1.2W ~ 1.8W by models @ auto detec AC output load≤10W will be changed to saving mode					
Working te	emperature	-25~+70°C(Refer to "Der	5~+70°C(Refer to "Derating curve")				
Safety	110Vac Model	CB IEC62368-1(Expect for UN Type), Dekra BS EN/EN62368-1(Expect for GFCI/UN-Type), UL458 approved					
standard	230Vac Model	CB IEC62368-1(Expect for UN Type), Dekra BS EN/EN62368-1(Expect for UN-Type), E13, EAC, AS/NZS62368.1 approved					

BS EN/EN55032, EN61000-4,2,3,8; EAC TP TC020(Expect for UN-Type)

■ 1200W			NEW NT	S-1200
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTS-1200-112	1200W	10.0-16.5	110 / 60	89%
NTS-1200-124□	1200W	20.0-33.0	110 / 60	91%
NTS-1200-148□	1200W	40.0-66.0	110 / 60	91.5%
NTS-1200-212□	1200W	10.0-16.5	230 / 50	90%
NTS-1200-224□	1200W	20.0-33.0	230 / 50	92%
NTS-1200-248□	1200W	40.0-66.0	230 / 50	93%

FCC (Expect for UN-Type)

2200W		Coming Soon	S-2200	
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTS-2200-112 🗆	2200W	10.0-16.5	110 / 60	89%
NTS-2200-124□	2200W	20.0-33.0	110 / 60	91%
NTS-2200-148□	2200W	40.0-66.0	110 / 60	92%
NTS-2200-212□	2200W	10.0-16.5	230 / 50	90%
NTS-2200-224□	2200W	20.0-33.0	230 / 50	92%
NTS-2200-248□	2200W	40.0-66.0	230 / 50	93%

■ 1700W			Coming Soon NT	S-1700
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTS-1700-112 🗆	1500W	10.0-16.5	110 / 60	89%
NTS-1700-124□	1500W	20.0-33.0	110 / 60	90%
NTS-1700-148□	1500W	40.0-66.0	110 / 60	91%
NTS-1700-212□	1700W	10.0-16.5	230 / 50	90%
NTS-1700-224□	1700W	20.0-33.0	230 / 50	92%
NTS-1700-248□	1700W	40.0-66.0	230 / 50	93%

3200W			Coming Soon	S-3200
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTS-3200-112 🗆	3000W	10.0-16.5	110 / 60	89%
NTS-3200-124□	3000W	20.0-33.0	110 / 60	90%
NTS-3200-148□	3000W	40.0-66.0	110 / 60	91%
NTS-3200-212□	3200W	10.0-16.5	230 / 50	90%
NTS-3200-224□	3200W	20.0-33.0	230 / 50	92%
NTS-3200-248□	3200W	40.0-66.0	230 / 50	93%

□ = AC output socket; Type-US/GFCI/UN for 110Vac models, Type-EU/CN/UK/AU/UN for 230Vac models; please refer to page 99



DC/AC Inverter 1200~3200W High Reliable True Sine Wave with UPS MEAN WELL





Features

- Built-in UPS function (AC by-pass)
- · True sine ware output (THD<3%)
- 200% high surge power for heavy load
- · AC output voltage and frequency selectable by DIP S.W
- No laod disspation<9W max.at standy saving mode
- -25~+70 C wide operating temperature
- · Power ON-OFF remote control
- · Remote controller (IRC1,IRC2,IRC3 accessory sold separately)

- · Protections :
- DC Input: Reverse polarity / DC low alarm / DC low shutdown / Over voltage Battery over discharge protection AC Output: Short circuit / Overload / Over temp.
- · Support RS-232 communication (Communication cable order NO.:RJ11-RS232,sold sperately)
- Suitable for lead-acid or li-ion batteries
- Conformal coating
- Pull handle accessory available (Order NO.: Carry handle, sold separately)

Model No).	NTU-1200	NTU-1700	NTU-2200	NTU-3200		
Rated Pow	ver(Continuos)	1200W	110Vac:1500W,230Vac:1700W	2200W	110Vac:3000W,230Vac:3200W		
Surge Pow	ver (30 Cycles.)	2000W	110Vac:3000W,230Vac:3400W	4400W	110Vac:6000W,230Vac:6400W		
DC input i	rated voltage	12Vdc, 24Vdc or 48Vdc					
AC output	voltage	110Vac model: 100 / 110 / 11	5 / 120Vac selectable by DIP S.W , 230)Vac model: <mark>200 / 220 / 2</mark>	30 / 240Vac selectable by DIP S.W		
Output fre	equency	50/60Hz selectable by DIP S.W					
AC output	t waveform	True sine wave (THD<3%)					
AC output	t regulation	±3.0% at rated input voltage					
No load d	issipation	Saving mode default disable,≤8W ~ 9W by models @ auto detec AC output load≤10W will be changed to saving mode					
AC by-pa	iss	10ms; Inverter mode ⇌ AC	C by pass mode				
Working t	emperature	-25~+70°C(Refer to "Derating curve")					
Safety	110Vac Model	CB IEC62368-1(Expect for	CB IEC62368-1(Expect for UN Type), Dekra BS EN/EN62368-1(Expect for GFCI/UN-Type), UL458 approved				
standard	230Vac Model	CB IEC62368-1(Expect for UN Type), Dekra BS EN/EN62368-1(Expect for UN-Type), E13, EAC, AS/NZS62368.1 approved					
- 110	110Vac Model	FCC (Expect for UN-Type)					
EMC	230Vac Model	BS EN/EN55032, EN61000	0-4,2,3,8; EAC TP TC020(Expect for	r UN-Type)			

■ 1200W			NEW NT	U-1200	
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.	
NTU-1200-112 🗆	1200W	10.0-16.5	110 / 60	89%	
NTU-1200-124□	1200W	20.0-33.0	110 / 60	90%	
NTU-1200-148□	1200W	40.0-66.0	110 / 60	91%	
NTU-1200-212□	1200W	10.0-16.5	230 / 50	90%	
NTU-1200-224□	1200W	20.0-33.0	230 / 50	92%	
NTII-1200-248	1200W	40.0-66.0	230 / 50	93%	

2200W			Coming Soon	U-2200
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTU-2200-112 🗆	2200W	10.0-16.5	110 / 60	89%
NTU-2200-124□	2200W	20.0-33.0	110 / 60	91%
NTU-2200-148□	2200W	40.0-66.0	110 / 60	92%
NTU-2200-212□	2200W	10.0-16.5	230 / 50	90%
NTU-2200-224□	2200W	20.0-33.0	230 / 50	92%
NTU-2200-248□	2200W	40.0-66.0	230 / 50	93%

■ 1700W			Coming Soon	TU-1700
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTU-1700-112 🗆	1500W	10.0-16.5	110 / 60	89%
NTU-1700-124□	1500W	20.0-33.0	110 / 60	90%
NTU-1700-148□	1500W	40.0-66.0	110 / 60	91%
NTU-1700-212□	1700W	10.0-16.5	230 / 50	90%
NTU-1700-224□	1700W	20.0-33.0	230 / 50	92%
NTU-1700-248□	1700W	40.0-66.0	230 / 50	93%

■ 3200W			Coming Soon	U-3200
Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Effi.
NTU-3200-112 🗆	3000W	10.0-16.5	110 / 60	89%
NTU-3200-124□	3000W	20.0-33.0	110 / 60	90%
NTU-3200-148□	3000W	40.0-66.0	110 / 60	91%
NTU-3200-212□	3200W	10.0-16.5	230 / 50	90%
NTU-3200-224□	3200W	20.0-33.0	230 / 50	92%
NTU-3200-248□	3200W	40.0-66.0	230 / 50	93%

□ = AC output socket; Type-US/GFCI/UN for 110Vac models, Type-EU/CN/UK/AU/UN for 230Vac models; please refer to page 99



DC/AC Inverter 200~3000W True Sine Wave





■ Features

- True sine wave output (THD<3%)
- **Price sine wave output (TIDS 3%)
 **200% high surge power for motor related application
 **Advanced digital control by microprocessor
 **Output voltage / frequency adjustable
 **High efficiency up to 92%
 **Conformal coating for TS-700
 **Stanks coving mode to conserve energy (TS 700)
 **Conformal coating for the conserve energy (TS 700)

- DC Input protections: Bat. low alarm / Bat. low shutdown / Reverse polarity / Over voltage
- AC Output protections:
 - Short circuit / Overload / Over temperature
- Applications:

 Fanless design 	Standby saving mode to conserve energy (TS-700) Fanless design (TS-200) Front panel indicator for load / battery / operation status						ance, power too I yachtetc. rranty		·		
■ General Spe	cification	(Please r	efer to www.	meanwell.	com for de	etail spec.)	c(f	Us E13		CB	AC (
			TS-400		TS-700	TS-1000	TS-150	00	TS-300	0	
Rated power(cont	inuous)	200W		400W		700W	1000W	1500W		3000W	
Output surge ratin	g (30 cycles.)	400W		800W		1400W	2000W	3000W		6000W	
DC input rated vo	Itage	12Vdc, 24	4Vdc or 48Vdc	*				d.			
AC output voltage		100 / 110	/ 115 / 120Vac	; 200 / 220 /	230 / 240Va	ac selectable by set	ting button				
Output frequency		50Hz / 6	OHz selectab	le by settir	ng button						
AC output wavefo	rm	True sin	e wave, THD	<3.0%	200						
AC output regulat	ion	±3% of	rated output	voltage							
No load dissipation	n	≤15W @ standby saving mode			≤6W @ standby	saving mode	saving mode ≤18W @ standby ≤10W @ stand saving mode saving mode				
Working temperat	ure	-10~+60 C (Refer to "Derating curve")				0~+60 C (Refer to "Derating curve")					
Safety standards		UL458(1 approve		124 GFCI s	ocket only), EAC TP TC004	UL458 (except TP TC004 appr		only for GFC	CI receptac	le), EAC
	230V		32368-1, EAC			0000	BS EN/EN6095				
EMC standards	110V 230V		ss A(112/124 EN55032 clas							Mark,	
■ 200W		L/O II	10020			■ 1000W					
Model No. TS-200-112A TS-200-124A TS-200-148A	Continue power 200W 200W 200W	Input (Vdc) 10.5-15 21.0-30 42.0-60	Output (Vac / Hz) 110 / 60 110 / 60 110 / 60	Output socket TYPE-A TYPE-A TYPE-A	Effi. 86.0% 87.5% 88.0%	Model No TS-1000-11 TS-1000-12 TS-1000-14	power 2A 1000W 4A 1000W	Input (Vdc) 10.5-15 21.0-30 42.0-60	Output (Vac / Hz) 110 / 60 110 / 60 110 / 60	Output socket TYPE-A TYPE-A TYPE-A	Effi. 88% 89% 90%
TS-200-212B TS-200-224B TS-200-248B	200W 200W 200W	10.5-15 21.0-30 42.0-60	230 / 50 230 / 50 230 / 50	TYPE-B TYPE-B TYPE-B	86.0% 87.5% 88.0%	TS-1000-21 TS-1000-22 TS-1000-24	4B 1000W	10.5-15 21.0-30 42.0-60	230 / 50 230 / 50 230 / 50	TYPE-B TYPE-B TYPE-B	90% 91% 92%
■ 400W						■ 1500W					
Model No. TS-400-112A TS-400-124A TS-400-148A	Continue power 400W 400W 400W	Input (Vdc) 10.5-15 21.0-30 42.0-60	Output (Vac / Hz) 110 / 60 110 / 60 110 / 60	Output socket TYPE-A TYPE-A TYPE-A	Effi. 84.5% 86.0% 87.0%	Model No TS-1500-11 TS-1500-12 TS-1500-14	2A 1500W 4A 1500W 8A 1500W	Input (Vdc) 10.5-15 21.0-30 42.0-60	Output (Vac / Hz) 110 / 60 110 / 60 110 / 60	Output socket TYPE-A TYPE-A TYPE-A	Effi. 87% 89% 90%
TS-400-212B	400W	10.5-15	230 / 50	TYPE-B	86.0%	TS-1500-21		10.5-15	230 / 50	TYPE-B	88%

TS-400-124 A 400W 21.0-30 110 / 60 TYPE-A 86.0 TS-400-148 A 400W 42.0-60 110 / 60 TYPE-A 87.0 TS-400-212 B 400W 10.5-15 230 / 50 TYPE-B 86.0 TS-400-224 B 400W 21.0-30 230 / 50 TYPE-B 87.0	Model No.	power	(Vdc)	(Vac / Hz)	socket	ETTI.
TS-400-148 A 400W 42.0-60 110 / 60 TYPE-A 87.1 TS-400-212 B 400W 10.5-15 230 / 50 TYPE-B 86.1 TS-400-224 B 400W 21.0-30 230 / 50 TYPE-B 87.5	TS-400-112A	400W	10.5-15	110 / 60	TYPE-A	84.5%
TS-400-212	TS-400-124 A	400W	21.0-30	110 / 60	TYPE-A	86.0%
TS-400-224B 400W 21.0-30 230 / 50 TYPE-B 87.5	TS-400-148 A	400W	42.0-60	110 / 60	TYPE-A	87.0%
	TS-400-212 B	400W	10.5-15	230 / 50	TYPE-B	86.0%
TS-400-248B 400W 42.0-60 230 / 50 TYPE-B 88.8	TS-400-224 B	400W	21.0-30	230 / 50	TYPE-B	87.5%
	TS-400-248 B	400W	42.0-60	230 / 50	TYPE-B	88.5%

7	n	n	V	V	
	u	υ	٧	٧	

Model No.	Continue power	Input (Vdc)	Output (Vac / Hz)	Output socket	Effi.
TS-700-112 A	700W	10.5-15	110 / 60	TYPE-A	86%
TS-700-124A	700W	21.0-30	110 / 60	TYPE-A	88%
TS-700-148 A	700W	42.0-60	110 / 60	TYPE-A	89%
TS-700-212 B	700W	10.5-15	230 / 50	TYPE-B	89%
TS-700-224 B	700W	21.0-30	230 / 50	TYPE-B	90%
TS-700-248 B	700W	42.0-60	230 / 50	TYPE-B	91%

 \square = A, B (standard model), C, D or F (optional model)



3	N	n	n	V	N	
•	v	•	v		w	

Model No. TS-3000-112 A TS-3000-124 A TS-3000-148 A TS-3000-212 B	Continue power 3000W 3000W 3000W 3000W	Input (Vdc) 10.5-15 21.0-30 42.0-60 10.5-15	Output (Vac / Hz) 110 / 60 110 / 60 110 / 60 230 / 50	Output socket TYPE-A TYPE-A TYPE-A TYPE-B	Effi. 88% 90% 91% 89%
TS-3000-244 B	3000W	21.0-30	230 / 50	TYPE-B	91%
TS-3000-248 B	3000W	42.0-60	230 / 50	TYPE-B	92%



DC/AC Inverter 1500~3000W True Sine Wave with AC & Solar Charger MEAN WELL





■ Features

- True sine wave output (THD<3%)
- · 200% high surge power for heavy load
- · Advanced digital control by microprocessor
- Output voltage / frequency selectable
- High efficiency up to 91%
- · Front panel indicator for load / battery / operation status
- · High frequency design

- · Protections:
- DC Input:Bat. low alarm / Bat. low shutdown / Reverse polarity / Over voltage
- AC Output: Short circuit / Overload / Over temperature
- · Applications: Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- · 3 years warranty

General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		TN-1500	TN-3000		
Rated output power(Continuos)		1500W	3000W		
Surge power (30 cycles)		3000W 6000W			
DC input rated voltage		12Vdc, 24Vdc or 48Vdc			
AC output voltage		100 / 110 / 115 / 120Vac or 200 / 220 / 230 / 240Vac adjustable via front panel or monitoring software			
AC output regulation (Typ.)		±3% of rated output voltage			
No load dissipation (Typ.)		≤18W @ standby saving mode	ode ≤10W @ standby saving mode		
Output frequency		50Hz/60Hz selectable via front panel or monitoring software			
AC output waveform		True sine wave, THD<3.0%			
Transfer time (Typ.)		10ms; inverter mode Bypass mode			
Working temperature		0~+60°C			
Safety standards	110Vac	UL458 approved (112/124 GFCI socket only), EAC TP TC004 approved			
	230Vac	CB IEC62368-1, EAC TP TC 004 approved			
EMC standards	110Vac	FCC part 15 class A(112/124/148), EAC TP TC020			
	230Vac	BS EN/EN55032 class A (class B for TN-1500), EN61000-4-2,3,4,5,6,8,11, E-Mark, EAC TP TC020			

■ 1500W (Inverter with AC & Solar Charger)


Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-1500-112A	1500W	10.5-15	110 / 60	TYPE-A	87%
TN-1500-124A	1500W	21.0-30	110 / 60	TYPE-A	89%
TN-1500-148A	1500W	42.0-60	110 / 60	TYPE-A	89%
TN-1500-212B	1500W	10.5-15	230 / 50	TYPE-B	88%
TN-1500-224 B	1500W	21.0-30	230 / 50	TYPE-B	90%
TN-1500-248 B	1500W	42.0-60	230 / 50	TYPE-B	91%

■ 3000W (Inverter with AC & Solar Charger)

1			5	/	
Model No.	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-3000-112A	3000W	10.5-15	110 / 60	TYPE-A	88%
TN-3000-124A	3000W	21.0-30	110 / 60	TYPE-A	90%
TN-3000-148A	3000W	42.0-60	110 / 60	TYPE-A	91%
TN-3000-212B	3000W	10.5-15	230 / 50	TYPE-B	89%
TN-3000-224 B	3000W	21.0-30	230 / 50	TYPE-B	91%
TN-3000-248 B	3000W	42.0-60	230 / 50	TYPE-B	92%

□ = A, B (standard model), C, D, F or G (optional model)

Solar Inverter Block Diagram (Inverter with AC & Solar Charger)

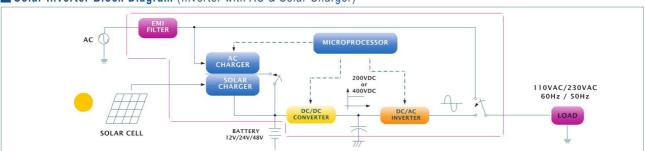



DC/AC Inverter

100~2500W Modified Sine Wave






■ Features


- · High frequency design
- · Protections: DC Input: Reverse polarity / Over and under voltage / Battery low alarm and shutdown DC Output:
- Short circuit / Overload / Over temp. Low cost • With power ON/OFF switch and LED • 1 year warranty
- · Remote ON/OFF controller for 1000~2500W (sold separately)
- · Built-in USB 5Vdc/0.5A and without fan for 100W
- Input and output are fully isolated

■ Output Socket (optional)



TYPE-2,3 (standard model); TYPE-1,4,5,6 (optional model)

General Specification (Please refer to www.meanwell.com for detail spec.)

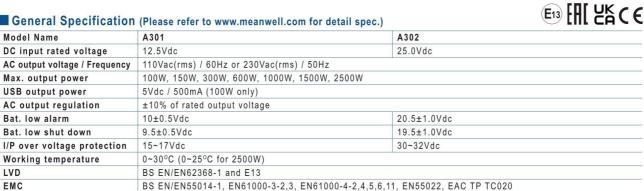


					1-1
■ 100W					
Model Name A301-100-F3 A302-100-F3	Continue power 100W 100W	Input (Vdc) 10-15 21-30	Output (Vac / Hz) 230 / 50 230 / 50	Output socket TYPE-3 TYPE-3	Effi. 90% 90%
■ 150W					
Model Name A301-150-B2 A301-150-F3 A302-150-B2 A302-150-F3	Continue power 150W 150W 150W 150W	Input (Vdc) 10-15 10-15 21-30 21-30	Output (Vac / Hz) 110 / 60 230 / 50 110 / 60 230 / 50	Output socket TYPE-2 TYPE-3 TYPE-2 TYPE-3	Effi. 78% 78% 82% 82%
300W					
Model Name A301-300-B2 A301-300-F3 A302-300-B2 A302-300-F3	Continue power 300W 300W 300W 300W	Input (Vdc) 10-15 10-15 21-30 21-30	Output (Vac / Hz) 110 / 60 230 / 50 110 / 60 230 / 50	Output socket TYPE-2 TYPE-3 TYPE-2 TYPE-3	82% 82% 85% 85%
■ 600W					
Model Name A301-600-B2 A301-600-F3 A302-600-B2 A302-600-F3	Continue power 600W 600W 600W 600W	Input (Vdc) 10-15 10-15 21-30 21-30	Output (Vac / Hz) 110 / 60 230 / 50 110 / 60 230 / 50	Output socket TYPE-2 TYPE-3 TYPE-2 TYPE-3	Effi. 82% 82% 85% 85%

100000					
1000W					
Model Name	Continue power	Input (Vdc)	Output (Vac / Hz)	Output socket	Effi.
A301-1K0-B2	1000W	10-15	110 / 60	TYPE-2	82%
A301-1K0-F3	1000W	10-15	230 / 50	TYPE-3	82%
A302-1K0-B2	1000W	21-30	110 / 60	TYPE-2	85%
A302-1K0-F3	1000W	21-30	230 / 50	TYPE-3	85%
1500W					
Model Name	Continue power	Input (Vdc)	Output (Vac / Hz)	Output socket	Effi.
A301-1K7-B2	1500W	10-15	110 / 60	TYPE-2	82%
A301-1K7-F3	1500W	10-15	230 / 50	TYPE-3	82%
A302-1K7-B2	1500W	21-30	110 / 60	TYPE-2	85%
A302-1K7-F3	1500W	21-30	230 / 50	TYPE-3	85%
2500W					
Model Name	Continue power	Input (Vdc)	Output (Vac / Hz)	Output socket	Effi.
A301-2K5-B4	2500W	10-15	110 / 60	TYPE-4	82%
A301-2K5-F3	2500W	10-15	230 / 50	TYPE-3	82%
A302-2K5-B4	2500W	21-30	110 / 60	TYPE-4	85%
A302-2K5-F3	2500W	21-30	230 / 50	TYPE-3	85%



Harsh Environment 100~185W Single Output



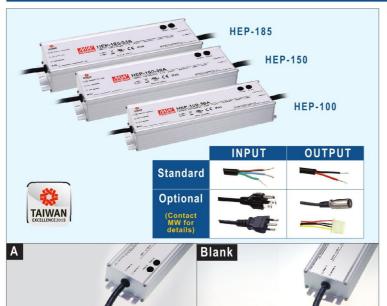

■ Features

- Universal AC input 90~305VAC
- High efficiency up to 94%
- · Fanless design, cooling by free air convection
- · Ultra-wide operating temperature
- Meet 6kV surge immunity level
- Withstand 10G vibration test
- Operating altitude up to 5000 meters
- · Protections:

Short circuit / Overload / Over voltage / Over temperature

· Multiple models for choice:

A-Type: IP65 rated, Vo and Io can be adjusted through internal potentiometer

Blank-Type(option): IP68 rated, Vo and Io fixed

- · Suitable for general industrial applications at high/low temperature, high dust, high moisture, high vibration, high salt or outdoor environment
- 6 years warranty

IP68 IP65



Model No.		HEP-100	HEP-150	HEP-185		
AC input volt	tage range	85~264VAC, 120~370VDC	'			
AC inrush cu	irrent (max.)	Cold start, 60A at 230VAC	Cold start, 65A at 230VAC	Cold start, 65A at 230VAC		
DC adjustment range		Io: 60%~100% of rated output current adjustment Io: 5		Vo: -10%-+10% by VR(A-Type only) Io: 50%-100% of rated output current by VR(A-Type only)		
Overload protection		105%~125% constant current limi	105%~125% constant current limiting, auto-recovery			
Over voltage protection		108%~135% rated output voltage				
Setup, rise, hold up time		500ms, 50ms, 16ms at full load and 230VAC				
Withstand vo	ltage	I/P-O/P: 3.75kVAC, I/P-FG: 2kVAC, O/P-FG: 1.5kVAC				
Working tem	perature	-55~+70°C (refer to output derating curve)				
Safety standa	ards	UL62368-1, EAC TP TC 004 approved				
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020				
Input		UL rated, SJTW 18AWGx3C(30cm)				
Connection	Output	SJTW 14AWGx2C(30cm)	SJTW 14AWGx2C(30cm)			
Dimension (LxWxH)(mm)		220x 68x 38.8	228x 68x 38.8	228x 68x 38.8		

■ 100W			H	IEP-100	
Model No.	Output	Tol.	R&N	Effi.	
HEP-100-12A	12V, 0~8.34A	±2.0%	120mV	92%	
HEP-100-15A	15V, 0~6.67A	±1.5%	150mV	92%	
HEP-100-24A	24V, 0~4.00A	±1.0%	150mV	93%	
HEP-100-36A	36V, 0~2.65A	±1.0%	200mV	93%	
HEP-100-48A	48V, 0~2.00A	±1.0%	200mV	93%	
HEP-100-54A	54V, 0~1.77A	±1.0%	200mV	93%	
= A or Blank, A:	= A or Blank, A: standard model(IP65), Blank: optional model(IP68)				

150W			H	HEP-150
Model No.	Output	Tol.	R&N	Effi.
HEP-150-12A	12V, 0~12.5A	±2.5%	150mV	91.5%
HEP-150-15A	15V, 0~10.0A	±2.0%	150mV	92.0%
HEP-150-24 A	24V. 0~6.30A	+1.0%	150mV	93.0%

Model No.	Output	Tol.	R&N	Effi.
HEP-150-36A	36V, 0~4.20A	±1.0%	200mV	93.5%
HEP-150-48A	48V, 0~3.20A	±1.0%	200mV	94.0%
HEP-150-54A	54V, 0~2.80A	±1.0%	200mV	94.0%
= A or Blank, A: standard model(IP65), Blank: optional model(IP68)				

■ 185W			H	HEP-185	
Model No.	Output	Tol.	R&N	Effi.	
HEP-185-12A	12V, 0~13.0A	±2.5%	150mV	91.5%	
HEP-185-15A	15V, 0~11.5A	±2.0%	150mV	92.0%	
HEP-185-24A	24V, 0~7.80A	±1.0%	150mV	93.5%	
HEP-185-36A	36V, 0~5.20A	±1.0%	200mV	93.5%	
HEP-185-48A	48V, 0~3.90A	±1.0%	200mV	94.0%	
HEP-185-54A	54V, 0~3.45A	±1.0%	200mV	94.0%	
= A or Blank, A: standard model(IP65), Blank: optional model(IP68)					



Harsh Environment 240~480W Single Output





■ Features

- Universal AC input 90~305VAC
- High efficiency up to 95%
- Fanless design, cooling by free air convection
- · Ultra-wide operating temperature
- · Meet 6kV surge immunity level
- · Withstand 10G vibration test
- · Operating altitude up to 5000 meters
- · Protections: Short circuit / Overload /

Over voltage / Over temperature

· Multiple models for choice:

A-Type: IP65 rated, Vo and Io can be adjusted through internal potentiometer

Blank-Type(option): IP68 rated, Vo and Io fixed

- · Suitable for general industrial applications at high/low temperature, high dust, high moisture, high vibration, high salt or outdoor environment
- 6 years warranty

IP68 IP65 P. M. FIICB CKCE

- Contrat opcomo		(1.10000 10101 10 11 11 11 11 11	annomicon for actan open,	THE CHAIN THE CHAIN	
Model No.		HEP-240	HEP-320	HEP-480	
AC input volt	tage range	85~264VAC, 120~370VDC			
AC inrush cu	rrent (max.)	Cold start, 75A at 230VAC	Cold start, 70A at 230VAC	Cold start, 35A at 230VAC	
DC adjustment range		Vo: -6%~+6% by VR (HEP-240 A-Type only) Io: 50%~100% of rated output current by VR (A-Type only)	Vo: -10%~+10% by VR (HEP-320 A-Type only) Io: 50%~100% of rated output current by VR (A-Type only)	Vo: -15%~+5% by VR Io: 50%~100% of rated output current by VR	
Overload pro	tection	105%~125% hiccup mode, auto-recovery		105%~125% constant current limiting, auto- recovery	
Over voltage protection		108%~135% rated output voltage			
Setup, rise, h	hold up time	500ms, 80ms, 15ms at full load and 230VAC		500ms, 80ms, 16ms at full load and 230VAC	
Withstand vo	ltage	I/P-O/P: 3.75kVAC, I/P-FG: 2kVAC, O/P-FG: 1.5kVAC			
Working temp	perature	-55~+70°C (refer to output derating curve)		-55~+65°C (refer to output derating curve)	
Safety standa	ards	UL62368-1, EAC TP TC 004 approved			
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11,		, EAC TP TC 020	
Input		UL rated, SJTW 18AWGx3C (30c	cm)	UL rated, SJOW 17AWGx3C (30cm)	
Connection	Output	SJTW 14AWGx2C (30cm)		SJOW 17AWGx2C+17AWGx2C	
Dimension (LxWxH)(mm)		244.2x 68x 38.8	252x 90x 43.8	262x 125x 43.8	

240W	HEP-240			
Model No.	Output	Tol.	R&N	Effi.
HEP-240-12 A	12V, 0~16.0A	±2.5%	150mV	90.0%
HEP-240-15 A	15V, 0~15.0A	±2.0%	150mV	90.0%
HEP-240-24 A	24V, 0~10.0A	±1.0%	150mV	92.5%
HEP-240-36 A	36V, 0~6.70A	±1.0%	250mV	92.5%
HEP-240-48 A	48V, 0~5.00A	±1.0%	250mV	93.0%
HEP-240-54 A	54V, 0~4.45A	±1.0%	350mV	93.5%
= A or Blank, A:	standard model(I	P65), Blank	: optional	model(IP68)

320W				HEP-320
Model No.	Output	Tol.	R&N	Effi.
HEP-320-12A	12V, 0~22.0A	±3.0%	150mV	91.0%
HEP-320-15A	15V, 0~19.0A	±2.0%	150mV	92.5%

Model No.	Output	Tol.	R&N	Effi.
HEP-320-24A	24V, 0~13.34A	±1.0%	150mV	94.0%
HEP-320-36A	36V, 0~8.90A	±1.0%	250mV	94.0%
HEP-320-48A	48V, 0~6.70A	±1.0%	250mV	94.5%
HEP-320-54A	54V, 0~5.95A	±1.0%	350mV	95.0%
= A or Blank, A	: standard model(II	P65), Blank	c optional m	odel(IP68)

480W				HEP-480
Model No.	Output	Tol.	R&N	Effi.
HEP-480-24A	24V, 0~20A	±1.0%	200mV	94.0%
HEP-480-36A	36V, 0~13.3A	±1.0%	250mV	95.0%
HEP-480-48A	48V, 0~10A	±1.0%	250mV	94.5%
HEP-480-54A	54V, 0~8.9A	±1.0%	350mV	95.0%
= A or Blank,	A: standard mode	I(IP65), Blai	nk: optional	model(IP68)



Harsh Environment 600~1000W Single Output





■ Features

- Universal AC input 90~305VAC
- Built-in active PFC function
- No load power consumption <0.5W at remote OFF (HEP-600)
- High efficiency up to 96%
- · Fanless design, cooling by free air convection
- · Ultra-wide operating temperature
- · Withstand 10G vibration test
- · Operating altitude up to 5000 meters
- · Protections: Short circuit / Overload / Over voltage / Over temperature

- · Vo and Io can be adjusted through internal potentiometer
- · Suitable for general industrial applications at high/low temperature, high dust, high moisture, high vibration, high salt or outdoor environment
- Built-in PMBus protocol/ optional CANBus protocol (HEP-1000)
- Output voltage and current programmable(HEP-1000)
- Wiring type with IP67 rating (HEP-1000-W)
- 6 years warranty



General Specification (Please refer to www meanwell com for detail spec.)

Model No.		HEP-600	HEP-1000		
AC input volt	tage range	85~264VAC, 120~370VDC	90~305VAC; 250~431VDC		
AC inrush cu	rrent (max.)	Cold start, 70A at 230VAC	Cold start, 40A at 230VAC		
DC adjustme	nt range	Vo: -15%~+5% by potentiometer Io: 50%~100% of rated output current by VR	Vo: 0%~+25% by VR		
Overload pro	tection	105%~125% constant current limiting, auto-recovery			
Over voltage protection		108%~135% rated output voltage	125%~145% rated output voltage		
Setup, rise, hold up time		500ms, 80ms, 15ms at full load and 230VAC	1800ms, 80ms, 12ms at full load and 230VAC		
Withstand vo	Itage	I/P-O/P: 3.75kVAC, I/P-FG: 2kVAC, O/P-FG: 1.5kVAC	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 1.25kVAC		
Working tem	perature	-40~+70°C (refer to output derating curve)			
Safety standards		UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004 approved; design refer to EN61558-1, EN60335-1(by request)		
EMC standards		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020			
Connection	Input	3+7P / 11mm pitch terminal block with cover	3+4P / 11mm pitch terminal block with cover		
Connection	Output	3.77 7 Trinin pitch terminal block with cover	3141 / Trimin pitch terminal block with cover		
Dimension (LxWxH)(mm)		280x 144x 48.5	310x 144x 48.5		

Model No

600W				HEP-600
Model No.	Output	Tol.	R&N	Effi.
HEP-600-12	12V, 0~40A	±3.0%	150mV	93.0%
HEP-600-15	15V, 0~36A	±2.0%	150mV	94.0%
HEP-600-20	20V, 0~28A	±1.5%	150mV	95.0%
HEP-600-24	24V, 0~25A	±1.0%	150mV	95.0%
HEP-600-30	30V, 0~20A	±1.0%	200mV	95.5%
HEP-600-36	36V, 0~16.7A	±1.0%	250mV	95.5%
HEP-600-42	42V, 0~14.3A	±1.0%	250mV	96.0%

Model No.	Output	101.	Ran	EIII.
HEP-600-48	48V, 0~12.5A	±1.0%	250mV	96.0%
HEP-600-54	54V, 0~11.2A	±1.0%	350mV	96.0%
1000W			н	EP-1000
Model No.	Output	Tol.	R&N	Effi.
HEP-1000 24	24V, 0~42A	±1.0%	200mV	95%
HEP-1000-48	48V, 0~21A	±1.0%	250mV	96%
HEP-1000-100	100V, 0~10A	±1.0%	500mV	96%
= Blank or W; B	lank:terminal typ	oe, W: wirin	g type with	IP67

■ HEP-1000 Series functions

I/O TYPE	Function type	Power Supply Function	Charging Function	PV/PC Programmable	PMBus Protocol	CANBus Protocol	LED Indicator	Remote On/Off	DC-OK Signal	Temperature Compensation	12V/0.5A Aux. output
Terminal	Blank	V(default)	V	V	V		V	V	V	V	V
type	CAN	V(default)	V	V		V	V	V	V	V	V
	Blank	V		V					V		V
AAP - Tagana	PM	V			٧				V		V
Wiring type	CAN	V				V			٧		V
	CPM		V		V				V	٧	V
	CCAN		٧			V			٧	٧	V



Security Series 240~480W All-In-One Security Power





■ Features


- · All-in-one function with Power supply, DC-UPS, battery charger and status monitoring in ONE compact unit
- Universal input 90~305VAC (277VAC available)
- From C relay contacts and LED indicator for AC fail, bat low, Charger Circuit fail, DC OK
- Built-in MODBus protocol, CANBus optional
- Charging curve can be set with SBP-001(see page 97)
- \cdot 20~100% charging current adjustable by VR

- 2 or 3-stage selectable by DIP S.W, suitable for lead acid and li-ion batteries
- · Load-dependent high speed battery charging
- Proections:OLP/OTP/OVP/BAT cut off/ BAT reverse polarity(NO damage)
- -30~+70 C wide operating temp
- Signal and alarms design meet UL2524,NFPA 1221 ,BS EN/EN54-4 and GB17945 requirement
- 3 years warranty



Model No.			DRS-240	DRS-480									
AC input voltage range		nge	90~305VAC; 127~431VDC										
Total O/P I	Power		Combined power on all channels 240W (DRS-240)/480W((DRS-480)									
Withstand	voltage		I/P-O/P:4kVAC I/P-FG:2kVAC O/P-FG:1.5kVAC										
Working te	mperatu	re	-30~+70°C (refer to output derating curve)										
Safety sta	ndards		UL62368-1,DEKRA BS EN/EN62368-1, EAC TP TC004 ap	proved									
EMC stand	ards		BS EN/EN55032 class B, EN61000-4-2,3,4,5,6,8; BS E	EN/EN54-4 for fire and fire alarm system									
		AC fail	Signals AC failure and activates when input voltage di	rops below:85~90% of 120Vac, 60~85% of 220Vac									
	From-C	charger circuit fail	Relay contact, Relay ON:DC OK, Relay OFF:charger fail										
	Relay	DC OK	Signals normal DC output and activates when output v	voltage>90% rated									
			tions								Bot.low/	Relay contact, Relay ON:Bat. OK, Relay OFF:Bat.low	
Functions				Abnormal/ Disconnected	BAT.low voltage:<11V, <22V, <33V, <44V								
	BAT.star	rt	Restart system directly form bat.and does not reguire AC power										
	Charging current Adj.		20~100% charging current adjustable by VR										
	DC UPS		UPS switch to bat. within 10ms of AC failure										
	Commun	nication	Built-in MODBUS protocal, CANBus optional										
Dimension	(WxHxD)	(mm)	85.5x 125.2x 128.5	110x 125.2x 150									

240W				DRS-240
Model No.	Output	Tol.	R&N	Effi.
DRS-240-12	12V,0~20A	±1%	120mV	92%
DRS-240-24	24V,0~10A	±1%	240mV	93%
DRS-240-36	36V,0~6.6A	±1%	360mV	94%
DRS-240-48	48V,0~5A	±1%	480mV	94%
40014/				DD0 400
■ 480W				DRS-480
Model No.	Output	Tol.	R&N	DRS-480 Effi.
	Output 24V,0~20A	Tol . ±1%	R&N 240mV	
Model No.				Effi.
Model No. DRS-480-24	24V,0~20A	±1%	240mV	Effi. 93%





Security Series 40~60W Single Output with Battery Charger





■ Features

- · Single output with built-in battery charger circuit (UPS function)
- · Universal AC input / Full range
- · Can be installed on DIN rail

TS-35/7.5 or 15

· Protections:

Short circuit / Overload / Over voltage / Battery low protection / Battery reverse polarity protection by fuse


- · Alarm signal for AC OK and battery low via RELAY Contact
- · Pass LPS
- · LED indicator for power on
- · 3 years warranty



Model No.	DRC-40	DRC-60			
AC input voltage range	90~264VAC; 127~370VDC				
AC inrush current (max.)	Cold start, 30A at 115VAC, 60A at 230VAC	old start, 30A at 115VAC, 60A at 230VAC			
DC adjustment range	CH1,13.8V: 12~15V; 27.6V:24~30V	H1,13.8V: 12~15V; 27.6V:24~30V			
Overload protection	105%~150% hiccup mode, auto-recovery	05%~150% hiccup mode, auto-recovery			
Over voltage protection	105%~135% rated output voltage				
Setup, rise, hold up time	400ms, 50ms, 50ms at full load and 230VAC				
Withstand voltage	I/P-O/P:3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC				
Working temperature	-30~+70°C (refer to output derating curve)				
Safety standards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004,	AS/NZS62368.1 approved			
EMC standards	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-	-2,3,4,5,6,8,11, EAC TP TC 020			
Connection (screw DIN terminal)	I/P:3 poles, O/P: 8 poles				
Dimension (LxWxH)(mm)	40x 90x 100				

■ 40W				D	RC-40
Model No.	Output	Tol.	R&N	Effi.	Max.
DRC-40A	13.8V, 0~2.9A	±1%	120mV	86%	40W
	13.8V, 0~1.0A	(Charger)			
DRC-40B	27.6V, 0~1.45A	±1%	200mV	87%	40W
	27.6V, 0~0.5A	(Charger)			

■ 60W		DRC-60			
Model No.	Output	Tol.	R&N	Effi.	Max.
DRC-60A	13.8V, 0~4.3A	±1%	120mV	86%	59W
	13.8V, 0~1.5A	(Charger)			
DRC-60B	27.6V, 0~2.15A	±1%	200mV	88%	59W
	27.6V, 0~0.75A	(Charger)			





Security Series 100~180W Single Output with Battery Charger





■ Features

- · Single output with built-in battery charger crrcuit (UPS function)
- Universal AC input / Full range
- · Can be installed on DIN rail TS-35/7.5 or 15
- · Protections:

Short circuit / Overload / Over voltage / Battery low protection / Battery reverse polarity protection by fuse

- · Alarm signal for AC OK and battery low via **RELAY** contact
- · Fanless design
- · LED indicator for power on
- · 3 years warranty




(180W)						
Model No.	DRC-100	DRC-180				
AC input voltage range	90~264VAC; 127~370VDC					
AC inrush current (max.)	Cold start, 30A at 115VAC, 60A at 230VAC	Cold start, 35A at 115VAC, 70A at 230VAC				
DC adjustment range	CH1,13.8V: 12~15V; 27.6V:24~30V CH1:13.8V:12~15V; 27.6V:24~29V					
Overload protection	105%~150% hiccup mode, auto-recovery	05%~150% hiccup mode, auto-recovery				
Over voltage protection	105%~135% rated output voltage					
Setup, rise, hold up time	2400ms, 50ms, 50ms at full load and 230VAC	2000ms, 20ms, 20ms at full load and 230VAC				
Withstand voltage	I/P-O/P:3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC					
Working temperature	-30~+70°C (refer to output derating curve)	-20~+70°C (refer to output derating curve)				
Safety standards	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, AS/NZS62368.1 approved					
EMC standards	BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020					
Connection (screw DIN terminal)	I/P:3 poles, O/P: 10 poles	I/P:3 poles, O/P:8 poles				
Dimension (LxWxH)(mm)	55x 90x 100	63x 125.2x 113.5				

100W				DR	C-100
Model No.	Output	Tol.	R&N	Effi.	Max.
DRC-100A	13.8V, 0~7A	±1%	120mV	87%	97W
	13.8V, 0~2.5A	(Charger)			
DRC-100B	27.6V, 0~3.5A	±1%	240mV	89%	97W
	27.6V, 0~1.25A	(Charger)			

■ 180W			Coming	Soon D	RC-180
Model No.	Output	Tol.	R&N	Effi.	Max.
DRC-180A	13.8V, 0~9A	±1%	150mV	88%	180W
	13.8V, 0~4A	(Charger)			
DRC-180B	27.6V, 0~4.5A	±1%	240mV	90%	180W
	27.6V, 0~2A	(Charger)			

Function Description		Output of Alarm
	when the power supply turns ON	RELAY Closed
AC OK	when the power supply turns OFF	RELAY Open
Battery Low	when the voltageof battery is under A:11V,B:22V	RELAY Closed
Dattery LOW	when the voltageof battery is above A:11V,B:22V	RELAY Open





Security Series 35~160W Single Output with Battery charger





■ Features

- · Single output with built-in battery charger circuit (UPS function)
- · Universal AC input / Full range
- PCB and enclosed type with metal case available
- · Compact size
- · Protections:
- Short circuit / Overload / Over voltage
- · Battery low protection / Battery reverse polarity protection by fuse
- · Alarm signal for AC OK and battery low via RELAY contac
- · Fanless design
- · 100% full load, burn-in test
- · 2 years warranty



■ 35W				Р	SC-35	
Model No.	Output	Tol.	R&N	Effi.	Max.	
PSC-35A□	13.8V, 0~2.6A	±1%	120mV	84%	36W	
	13.8V, 0~0.9A	(Charger)				
PSC-35B□	27.6V, 0~1.3A	±1%	240mV	86%	36W	
	27.6V, 0~0.45A	(Charger)				
☐ = blank, -C; Blank: PCB Type, -C: Enclosed Type						

■ 60W				Р	SC-60
Model No.	Output	Tol.	R&N	Effi.	Max.
PSC-60A□	13.8V, 0~4.3A	±1%	120mV	84%	59W
	13.8V, 0~1.50A	(Charger)			
PSC-60B□	27.6V, 0~2.15A	±1%	240mV	84%	59W
	27.6V, 0~0.75A	(Charger)			
□ = blank, -0	; Blank: PCB Typ	e, -C: Enclos	ed Type		

100W				PS	C-100
Model No.	Output	Tol.	R&N	Effi.	Max.
PSC-100A□	13.8V, 0~7.0A	±1%	100mV	86%	100W
	13.8V, 0~2.5A	(Charger)			
PSC-100B□	27.6V, 0~3.50A	±1%	100mV	88%	100W
	27.6V, 0~1.25A	(Charger)			
□ = blank, -C	; Blank: PCB Type	, -C: Enclos	ed Type		

160W				PS	C-160
Model No.	Output	Tol.	R&N	Effi.	Max.
PSC-160A□	13.8V, 0~11.6A	±1%	150mV	88%	160W
	13.8V, 0~4A	(Charger)			
PSC-160B□	27.6V, 0~5.8A	±1%	240mV	90%	160W
	27.6V, 0~2A	(Charger)			
□ = blank, -C	; Blank: PCB Type	, -C: Enclos	ed Type		



Security Series 55~155W Single and Dual Output





■ Features

- · Universal AC input / Full range
- PF>0.92@230VAC and full load (155W only)
- · Protections:
- Short circuit / Overload / Over voltage
- Battery low protection (except for ADS series)
- · Fanless design
- · 2 years warranty


■ General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	ADS-55	AD-55	ADD-55	ADS-155	AD-155	ADD-155
AC input voltage range	88~264VAC; 1	24~370VDC				
AC inrush current	Cold start, 23A	old start, 23A at 115VAC, 45A at 230VAC				
DC adjustment range	12V, 24V, 48V	±10%; 13.8V: 12~	14.5V; 27.6V: 24~29	V; 54V: 48~58V		
Overload protection	CH1,2: 105%~	H1,2: 105%~135%, charger: 0.51~0.9A; constant current limiting, auto-recovery				
Over voltage protection	CH1: 115%~13	CH1: 115%~135% rated output voltage				
Setup, rise, hold up time	1000ms, 90ms	, 24ms at full load	and 230VAC			
Withstand voltage	I/P-O/P:3kVAC	, I/P-FG:2kVAC, O	P-FG: 0.5kVAC			
Working temperature	-10~+60°C (re	fer to output derati	ng curve)			
Safety standards	UL62368-1, TU	JV BS EN/EN62368	-1, EAC TP TC 004 a	pproved		
EMC standards	BS EN/EN5503	32 class B, EN6100	0-3-2,3, EN61000-4-	2,3,4,5,6,8,11, EAC	TP TC 020	
Connection	8P/ 9.5mm pito	ch terminal block				
Dimension (LxWxH)(mm)	159x 97x 38			199x 110x 50		

■ Single Output with 5V/4A DC-DC Converter ADS-55 Model No. R&N Effi. Output Tol. Max ADS-5512 12V. 0~4.0A ±1% 100mV 76% 51W 5V. 0~4.0A ±3% 100mV 24V, 0~2.5A 100mV ADS-5524 ±1% 79% 58W 5V, 0~4.0A ±3% 100mV

Single Out	put with Battery (Charger(UF	SFunct	ion)	AD-55
Model No.	Output	Tol.	R&N	Effi.	Max.
AD-55A	13.8V, 0~4.0A	±1%	100mV	71%	51W
	13.4V, 0~0.23A	(Charger)			
AD-55B	27.6V, 0~2.0A	±1%	100mV	74%	54W
	26.5V, 0~0.16A	(Charger)			

Dual Output	ut with Battery Ch	arger(UPS	Functio	n) Al	DD-55
Model No.	Output	Tol.	R&N	Effi.	Max.
ADD-55A	13.8V, 0~3.50A	±1%	100mV	71%	53W
	5V, 0~4.00A	±3%	100mV		
	13.4V, 0~0.23A	(Charger)			
ADD-55B	27.6V, 0~2.00A	±1%	150mV	74%	55W
	5V, 0~4.00A	±3%	150mV		
	26.5V, 0~0.16A	(Charger)			



Single Ou	itput with 5V/3	A DC-D	C Conver	ter A	DS-155
Model No.	Output	Tol.	R&N	Effi.	Max.
ADS-15512	12V, 0~12.5A	±2%	150mV	77%	153W
	5V, 0~3.00A	±3%	100mV		
ADS-15524	24V, 0~6.50A	±1%	150mV	82%	154W
	5V, 0~3.00A	±3%	100mV		
ADS-15548	48V, 0~3.20A	±1%	240mV	82%	154W

±5%

100mV

5V, 0~3.00A

Single Ou	ıtput with Battery	Charger(U	PS Func	tion)	AD-155
Model No.	Output	Tol.	R&N	Effi.	Max.
AD-155A	13.8V, 0~11.5A	±2%	150mV	80%	152W
	13.3V, 0~0.50A	(Charger)			
AD-155B	27.6V, 0~5.50A	±1%	150mV	84%	152W
	27.1V, 0~0.50A	(Charger)			
AD-155C	54.0V, 0~2.70A	±1%	240mV	84%	157W
	53.5V, 0~0.50A	(Charger)			

Dual Outp	ut with Battery C	harger(UP	SFunctio	on) Al	DD-155
Model No.	Output	Tol.	R&N	Effi.	Max.
ADD-155A	13.8V, 0~10.5A	±1%	150mV	78%	153W
	5V, 0~3.00A	±3%	100mV		
	13.3V, 0~0.50A	(Charger)			
ADD-155B	27.6V, 0~5.00A	±1%	200mV	81%	153W
	5V, 0~3.00A	±3%	100mV		
	27.1V, 0~0.50A	(Charger)			
ADD-155C	54.0V, 0~2.50A	±1%	240mV	81%	150W
	5V, 0~3.00A	±5%	100mV		
	53.5V, 0~0.20A	(Charger)			

Security Series

35~75W Single Output





■ Features

- · Universal AC input / Full range
- · Protections:
- Short circuit / Overload / Over voltage / Battery reverse polarity protection by fuse
- · Fanless design
- No load power consumption <0.75W

- Suitable for installation in metallic or non-metallic system enclosure
- Temperature compensation function
- · LED indicator for power on
- · 2 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)

c**91** us [III CB CKC€

Model No.	SCP-35	SCP-50	SCP-75		
AC input voltage range	input voltage range 85~264VAC; 120~370VDC				
DC adjustment range	95%~115% rated output voltage				
Overload protection	load protection 120%~165%, hiccup mode, auto-recovery				
Over voltage protection	protection 120%~140%, rated output voltage				
Withstand voltage	I/P-O/P: 3kVAC, I/P-FG:2kVAC, 1minute				
Working temperature	-20~+60°C (refer to output derating	g curve)			
Safety standards	UL62368-1, EAC TP TC 004 approv	ved			
EMC standards	BS EN/EN55032 class B, EN61000-3	3-2,3, EN61000-4-2,3,4,5,6,8,11,	EAC TP TC 020		
Connection	nnection I/P: 3 poles, O/P: 2 poles screw terminal				
Dimension (LxWxH)(mm) 99x 97x 36 129x 98x 38 159x 97x 38					

■ 35W					SCP-35
Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-35-12	13.8V, 0~2.6A	±2%	120mV	83%	35W
SCP-35-24	27.6V, 0~1.4A	±1%	200mV	86%	35W
■ 50W					SCP-50
Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-50-12	13.8V. 0~3.6A	±2%	120mV	81%	50W

■ 50W					SCP-50
Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-50-24	27.6V, 0~1.8A	±1%	200mV	85%	50W
75W					SCP-75
Model No.	Output	Tol.	R&N	Effi.	Max.
SCP-75-12	13.8V, 0~5.4A	±2%	120mV	80%	75W
SCP-75-24	27.6V, 0~2.7A	±1%	200mV	84%	75W

Difference	Product	Mounting			Functions			Working	WTY				
Series	Level	Style	Watt.	Built-in Charger	AC OK	DC OK	Bat Low	Bat. Abnormal or Disconnected	UPS	Communication Interface	Charging Curve Adj.	Temp.	(years)
SCP		Screw Mounted	35W 50W 75W	×	×	×	×	×	X	×	×	-20~+60 C	
AD/ADD/ADS	Basic	Mounted	55W 155W	√ (AD/ADD)	×	×	×	×	×	×	×	-10~+60°C	2
PSC-C			0.5144										
PSC	Advanced	Screw Mounted	35W 60W 100W 160W	√	√ (TTL)	×	√ (TTL)	×	√	×	×		
DRC		DIN Rail	40W 60W 100W 180W	√	√ (TTL)	×	√ (TTL)	×	√	×	×	-30~+70°C	2
DRS	Intelligent and All-in-one		240W 480W	V	√ (RELAY)	√ (RELAY)	√ (RELAY)	√ (RELAY)	√	MODBus (stardord) CANBus (option)	√		3



KNX Power

640mA / 1280mA KNX Bus Power Supply





■ Features


- EIB / KNX power supply with Integrated choke
- · Compact size with 3SU/4SU width
- Safety extra low voltage(SELV)
- · 180~264VAC input
- No load power consumption <0.5W
- Protections: Short circuit / Overload(short-circuit-proof) / Over voltage
- · Cooling by free air convection

- · Support both TP1-64 and new TP1-256 topology,
- reduce the usage of line repeater
- · Isolation class I
- · LED indicator for normal operation, bus reset and bus overload
- Installed on DIN rail TS-35/7.5 or 15
- · Over voltage category III
- · Wide operating temperature: -30~+70°C
- · 3 years warranty

SELV [H] UK CE

Model No.		KNX-20E-640	KNX-40E-1280 D		
AC input voltage range)	180~264VAC; 230~370VDC	180~264VAC; 176~280VDC		
AC inrush current (max	(.)	Cold start, 40A at 230VAC	Cold start, 60A at 230VAC		
LED indicators		ON: Green LED, normal operation, no fault; Rese Iout> Imax: Red LED, KNX bus overload; KNX-40E-			
0 1 1 1 1 1	Range	205%~235% rated output power			
Overload protection Type		constant current limiting, auto-recovery after fault condition is removed			
	Range	33~35V			
Over voltage protection	Туре	Shut down o/p voltage, re-power on to recover	Hiccup mode, recovers automatically after fault condition is removed		
Working temperature		-30~+70°C (refer to output derating curve)			
Safety standards		BS EN/EN61558-1,EN61558-2-16, EN50491-3, EAC TP TC 004 approved			
EMC standards		BS EN/EN50491-5-1,-5-2,-5-3, EN61000-4-2,3,4,5,6,8,11, EAC TP TC 020			
Connection (screw DIN terminal)		I/P: 3 poles; O/P: 2 poles screw DIN terminal & 2 KNX bus terminals (black/red)			
Dimension (WxHxD)(mr	n)	52.5x 90x 54.5 72x 90x 57			

Model No.	V out1 (with choke)	V out2 (without choke)	\mathbf{I}_{out} $(\mathbf{I}_1 \! + \! \mathbf{I}_2)$	Model No.	V out1 (with chock)	V out2 (without chock)	out (I ₁ +I ₂)
KNX-20E-640	Bus, 30VDC	30VDC	640mA	KNX-40E-1280D : Blank, D ; Bla	Bus, 30VDC ink= Basic function	30VDC on, D=Diagnostic fur	1280mA nction

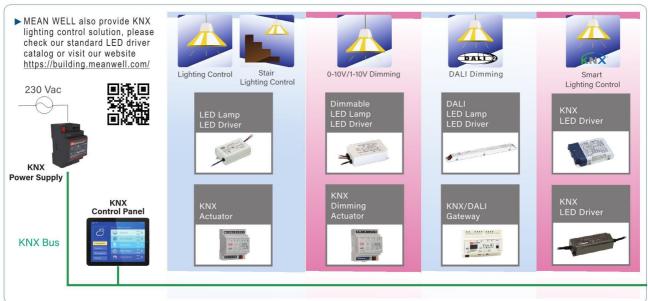



KNX DIN Device

Switching & Dimming Actuator



KNX Universal Actuator



- · 8 channel actuator in a compact size
- · Suitable for various and mixed applications
- · For AX, C-load, capacitive & inductive of loads
- · Capactive load 220 µF
- · Program via ETS5.0 software
- · Manual control via Push button
- · Programmable various time and scene function
- · 3 years warranty

Model No.	Channel	Rating current / Channel
KAA-8R	8-Fold	16A
KAA-8R-10	8-Fold	10A

KNX Dimming Actuator



- Dimming and switching LED driver and conventional electronic ballast
- · Capactive load 220 µF
- · LED indicator for each channel
- · Linear or logarithmic dimming curve programable via ETS software
- · Manual control via Push button on panel
- Programmable various time and scene function
- · 3 years warranty

Model No.	Channel	Rating current / Channel
KAA-4R4V(optional)	4-Fold	16A
KAA-4R4V-10	4-Fold	10A

Durability of KNX Actuator

All MEAN WELL KNX actuator has been tested more than standard to $220\mu F$ to ensure long term operation in the system. In case even higher demand is required, the inrush current limiter can be placed between KNX actuator and the loads to further increase the capacitive load to $2500\mu F$.





LED Sign Panel

160~200W Slim Width and Low Profile





■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- · Slim width and low profile
- · Built-in active PFC function
- Built in current sharing (LSP-160)
- Fanless design, cooling by free air convection
- · Protections:
- Short circuit / Overload / Over voltage / Over temp.
- DC OK signal
- LED indicator for power on (LSP-160 / UHP-200A)
- Suitable for moving sign applications
- 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.) General Specification (Please refer to www.meanwell.com for detail spec.)

Model No.	LSP-160	UHP-200A	
AC input voltage range	100~264VAC; 141~370VDC	90~264VAC; 141~370VDC	
Leakage current	<0.75mA / 240V	Less than 1mA at 240VAC	
AC inrush current (max.)	Cold start, 85A at 230VAC		
DC adjustment range	3.2V: 3.2~3.5V, 4.2V:4~4.5V 5V: 4.7~5.3V	4.2V: 4.0~4.4V, 4.5V: 4.3~4.7V, 5V: 4.7~5.3V	
Overload protection	110%~140% rated output power/		
Over voltage protection	3.8~6.75V shut down O/P	4.6~7.1V Shut down O/P	
Setup, rise, hold up time	2000ms, 80ms, 10ms at 230VAC	2000ms, 200ms, 10ms at 230VAC	
Withstand voltage	I/P-O/P:3.75KVAC, I/P-FG:2KVAC, O/P-FG:1.25KVAC	I/P-O/P:3kVAC, I/P-FG:2kVAC, O/P-F/G: 0.5kVDC	
Working temperature	-30~+70°C (refer to output derating curve)		
Vibration	10~500Hz, 5G 10min. / 1 cycle, period for 60 min., each along X, Y, Z axes		
Safety standards	UL62368-1,TUV BS EN/EN62368-1, CCC GB4943, EAC TP TC 004, BSMI CNS14336-1 approved, Design refer to EN60335-1	UL62368-1, TUV BS EN/EN62368-1, CCC GB4943, EAC TP TC 004 approved	
EMC standards Compliance to BS EN/EN55032 / EN55035 GB9254, Class 2		BS EN/EN55032 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, EN55024, GB9254, GB17625.1, EAC TP TC 020	
Dimension (LxWxH)(mm)	194x 55x 20	167x 55x 26	

■ 160W			L	SP-160
Model No.	Output	Tol.	R&N	Effi.
LSP-160□-3.3○	3.3V, 0~32A	±2%	200mV	87.5%
LSP-160 -4.2	4.2V, 0~32A	±2%	200mV	88.5%
LSP-160□-5○	5V, 0~32A	±2%	200mV	89.5%
LSP-160-12	12V, 0~13.5A	±1%	240mV	92.5%
LSP-160-24	24V, 0~6.75A	±1%	240mV	93.5%
LSP-160-36	36V, 0~4.5A	±1%	240mV	93.5%

= R with current sharing function = T or W, T: For terminal block; W: For wafer connector				
200W			UF	IP-200A
Model No.	Output	Tol.	R&N	Effi.
UHP-200A-4.2	4.2V, 0~40A	±4%	200mV	88%
UHP-200A-4.5	4.5V, 0~40A	±4%	200mV	88%
UHP-200A-5	5V, 0~40A	±4%	200mV	88.5%

Tol.

±1%

Output

48V, 0~3.4A

NOTE: Current sharing function available for < 5 V only

Model No.



Effi.

93.5%

R&N

300mV

Rainproof

200~400W Economical Single Output






■ Features

- ERP-200/350: 180~264VAC input only ERPF-400: 90~264VAC input (withstand 300VAC surge input for 5 sec.)
- Built-in active PFC function (ERPF-400)
- · Semi-potted and design against rain splash
- Fanless design, cooling by free air convection
- Protections: Short circuit / Overload / Over voltage / Over temperature
- LED indicator for power on
- · Low cost, high reliability
- Suitable for channel letter, strip lighting and moving sign applications
- 3 years warranty

Model No.		ERP-200	ERP-350	ERPF-400		
AC input voltage range		180~264VAC; 254~370VDC	90~264VAC; 127~370VDC			
AC inrush cur	rent (max.)	Cold start, 90A at 230VAC				
Setup, rise, ho	old up time	1500ms, 200ms, 20ms at 230VAC		2000ms, 100ms, 10ms at 230VAC		
DC adjustmen	t range	±10% rated output voltage				
Overload	Range	110%~140% rated output power	110%~180% rated output power	105%~135% rated output power		
protection	Туре	Hiccup mode, auto-recovery		Constant current limiting, auto-recovery		
Over voltage protection	Range	12V: 13.8~16.2V, 24V: 27.6~32.4V	12V: 13.8~16.2V, 24V: 27.6~32.4V, 36V: 41.4~46.8V, 48V: 57.6~67.2V	12V: 13.8~16.2V, 24V: 27.6~32.4V, 48V: 55.2~64.8V		
	Type	Hiccup mode, auto-recovery	Shut down O/P voltage, re-power on to recover			
Withstand vol	tage	I/P-O/P: 3kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC				
Working temp	erature	-30~+60°C (refer to output deratin	g curve)			
Safety standards		IEC/ BS EN/EN62368-1 / CQC GB4943.1(24V),EAC TP TC 004, IS13252(part I) approved	UL62368-1, GB4943.1, EAC TP TC004, IS13252 (part1)	UL62368-1, TUV BS EN/EN62368-1, CCC GB4943.1, EAC TP TC 004, IS13252(part I) approved		
EMC standards		Design refer to BS EN/EN55032 cl. 4-5	Compliance to GB17625.1, BS EN/EN61000-3-3, EN61000-4-2,3,4,5,6,8,11, EN55032 class A, GB9254 class A, EAC TP TC020			
Connection Input Output		9P / 9.5mm pitch terminal block				
Dimension (LxWxH) (mm)		200x 120x 40	220.4x 130x 48			

■ ERP-350 Ser	ies	. P .	us Cec [FI	CA CB
Model No.	Output	Tol.	R&N	Effi.
ERP-350-12	12V, 0~26.7A	±1%	150mV	87%
ERP-350-24	24V, 0~14.6A	±1%	150mV	89%
ERP-350-36	36V, 0~9.7A	±1%	240mV	90%
ERP-350-48	48V, 0~7.3A	±1%	240mV	90%





DC/DC Converter 60W 10:1 Ultra Wide Input





- 150~1500Vdc 10:1 ultra-wide input range
- Potted with silicone, dust and moisture proof
- 4KVac I/O high isolation(Reinforced isolation)
- Protections:

■ Features

Short circuit / Overload / Over voltage / Over temperature / DC input under voltage / DC input reverse polarity

- Fanless and full encapsulated
- -30~+80°C wide operating temp. (>+55°C de-rating)
- Operating altitude up to 5000 meters
- DC OK relay contact
- Can be installed on DIN rail TS-35/7.5 or 15
- DC output voltage adjustable(+20%)
- Suitable for photovoltaic power generation, 380Vdc DC power distribution system or high voltage conver to low voltage
- 3 years warranty


External Fuse is required

	Fuse Brand	Manufa Part	MEAN WELL's Order NO.	
	r ass Brana	Fuse	Fuse Holder	Fuse + Fuse Holde
	Walter Fuse	WJ30-4	WJ30-H	DDRH-WJ30-4-H
	Littelfuse	SPXV-4A	LFPXV/LPXV	Not provide
	Bussmann	PV-4A10F85L	CHPV15L85	Not provide



Model No.	DDRH-60
DC input range	150~1500Vdc
DC Output Adj.	5Vo: 5~6V, 12Vo: 12~15V, 24V: 24~29V, 48Vo: 48~54V
Line regulation (1 sec.)	±0.5%
Load regulation (max.)	±0.5%(±1.5% for 5V)
Overload protection	105 ~ 135% rated output power; Hiccup up mode when output voltage<55%, recovers automatically after condition is removed; Constant current limiting, recovers automatically after fault condition is removed within 55% ~ 100% rated output voltage
Over voltage protection	Hiccup up mode, recovers automatically after fault condition is removed
Withstand voltage	I/P-O/P:4KVAC, O/P-DC OK:0.5KVAC
Working temperature(min.)	-30~+80°C (refer to output derating curve)
Safety standards	IEC62109-1(LVD), EAC TP TC 004 approved; Design refer to UL1741(By request)
EMC standards	BS EN/EN55032 class A, EN61000-4-2,3,4,5,6,8,11
Dimension (LxWxH)(mm)	57x 93.5x 105

60W				DDRH	-60
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
DDRH-60-5	150~1500	5	10	100	81
DDRH-60-12	150~1500	12	5	120	85
DDRH-60-24	150~1500	24	2.5	150	87
DDRH-60-48	150~1500	48	1.25	200	88

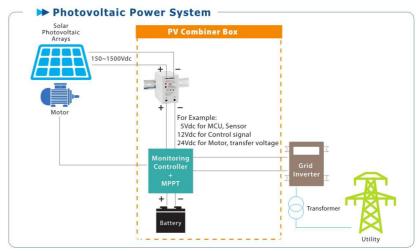



DC/DC Converter

15~60W ITE DIN Rail Type





■ Features

- Compact size with 1SU~3SU width
- 4:1 ultra-wide input range
- Protections: Short circuit / Overload / Over voltage /

Input reverse polarity / Input under voltage

- Fanless design
- Can be installed on DIN rail TS-35/7.5 or 15
- 4000VDC I/O isolation (Reinforced isolation)
- -40~+85°C ultra-wide operating temperature
- DC output adjustable (±10%)
- 3 years warranty



Model No.	DDR-15	DDR-30	DDR-60					
DC input range	G: 9~36V, L: 18~75V	: 9~36V, L: 18~75V						
Line regulation (1 sec.)	±0.5%).5%						
Load regulation (max.)	±0.5%~1.5% by model							
Overload protection	110%~150% hiccup mode, recovers a	110%~150% hiccup mode, recovers automatically after fault condition is removed						
Over voltage protection	115%~135% Shut down O/P voltage,	re-power on to recover						
Withstand voltage	I/P-O/P: 4kVDC							
Isolation resistance	100MΩ@500VDC							
Working temperature(min.)	-40~+85°C (refer to output derating of	curve)						
Safety standards	CB IEC62368-1, UL62368-1, AS/NZS62368.1, EAC TP TC004 approved							
EMC standards	BS EN/EN55032 class B, EN61000-3-3, EN61000-4-2,3,4,5,6,8, EN55024, EN61000-6-2(EN50082-2)							
Dimension (LxWxH)(mm)	17.5x 90x 54.5 35x 90x 54.5 52.5x 90x 54.5							

■ 15W					DDR-15
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
DDR-15G-3.3	9~36	3.3	3.5	50	84
DDR-15G-5	9~36	5	3	50	84
DDR-15G-12	9~36	12	1.25	60	85
DDR-15G-15	9~36	15	1	75	85
DDR-15G-24	9~36	24	0.63	100	86
DDR-15L-3.3	18~75	3.3	4.5	50	84
DDR-15L-5	18~75	5	3	50	85
DDR-15L-12	18~75	12	1.25	60	86
DDR-15L-15	18~75	15	1	75	86
DDR-15L-24	18~75	24	0.63	100	87

■ 30W					DDR-30
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
DDR-30G-5	9~36	5	6	60	85
DDR-30G-12	9~36	12	2.5	75	86
DDR-30G-15	9~36	15	2	75	87
DDR-30G-24	9~36	24	1.25	100	89

Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)	
DDR-30L-5	18~75	5	6	60	86	
DDR-30L-12	18~75	12	2.5	75	89	
DDR-30L-15	18~75	15	2	75	90	
DDR-30L-24	18~75	24	1.25	100	91	

60W					DDR-60
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
DDR-60G-5	9~36	5	10.8	60	87.5
DDR-60G-12	9~36	12	5	75	91
DDR-60G-15	9~36	15	4	75	91
DDR-60G-24	9~36	24	2.5	100	91
DDD 001 F	40.75	-	40	00	07.5
DDR-60L-5	18~75	5	12	60	87.5
DDR-60L-12	18~75	12	5	75	91
DDR-60L-15	18~75	15	4	75	92
DDR-60L-24	18~75	24	2.5	100	92



DC/DC Converter 120~480W Railway & ITE DIN Rail Type MEAN WELL





■ Features

- · Railway & ITE dual certification
- 2:1 wide input range
- 150% peak load capability
- Protections:

Short circuit / Overload / Over voltage / Over temp./ DC input reverse polarity / DC input under voltage Lockout

- Fanless design
- 4000VDC I/O isolation (Reinforced isolation)
- -40~+70°C wide operating temperature
- DC output adjustable(+15%)
- DC OK relay contact and Remote ON/OFF (DDR-240/480 only)
- Current sharing up to 1920W (3+1: 960W for DDR-240, 1920W for DDR-480)
- · 3 years warranty

■ General Specification (Please refer to www.meanwell.com for detail spec.)



Model No.		DDR-120	DDR-240	DDR-480		
DC input ran	ge	A: 9~18V, B: 16.8~33.6V, C: 33.6~67.2V, D: 67.2~154V	B: 16.8~33.6V, C: 33.6~67.2V, D: 67.2~154V			
DC output adj.range		12Vo: 9~14V(120W only),24Vo: 24~28	V,48Vo: 48~56V			
Line regulati	on (1 sec.)	±0.5%				
Load regulat	on (max.)	±1%				
Overload protection		105%~135% rated output power for m and then shut down O/P voltage with		150% rated output power for more than 5 seconds and then constant current protection 105~135% rated output power with auto-recovery		
Over voltage protection		120%~135% Shut down O/P voltage, re-power on to recover				
Withstand voltage		I/P-O/P: 4kVDC, I/P-FG: 2.5kVDC, O/P-FG: 2.5kVDC	I/P-O/P: 4kVDC, I/P-FG: 2 O/P-FG: 0.71kVDC	.5kVDC,		
Isolation res	stance	100MΩ@500VDC				
Working tem	erature(min.)	-40~+70°C (refer to output derating curve)		-40~+80 C		
	Industrial	CB IEC62368-1, UL62368-1, AS/NZS62368.1, EAC TP TC004 approved				
Safety standards	Railway	BS EN/EN50155: 2007—Comply with S1 level(3ms) and S2 level (10ms), refer to spec for load deratin 2017—Comply with S1 level; S2 level (DDR-480)				
		IEC60571, IEC61373, EN45545-2 (exc	cept for 9~18Vin)			
TMC -4	1-	BS EN/EN55032 class B, EN61000-3,	-2,-3, EN61000-4-2,3,4,5,6,8,	BS EN/EN55035 ,		
EMC standar	15	EAC TP TC 020; EN50121-3-2 (except		EN61000-4-2,3,4,5,6,8		
Dimension (LxWxH)(mm)			40x 125.2x 113.5			

240W

■ 120W				D	DR-120
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
DDR-120A-12	9~18	12	8.3	50	88.5
DDR-120A-24	9~18	24	4.2	50	88.5
DDR-120A-48	9~18	48	2.1	50	88.5
DDR-120B-12	16.8~33.6	12	10	50	89.0
DDR-120B-24	16.8~33.6	24	5	50	89.5
DDR-120B-48	16.8~33.6	48	2.5	50	91.0
DDR-120C-12	33.6~67.2	12	10	50	89.5
DDR-120C-24	33.6~67.2	24	5	50	91.0
DDR-120C-48	33.6~67.2	48	2.5	50	92.0
DDR-120D-12	67.2~154	12	10	50	89.5
DDR-120D-24	67.2~154	24	5	50	91.0
DDR-120D-48	67.2~154	48	2.5	50	91.5
240W				D	DR-240
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
DDR-240B-24	16.8~33.6	24	10	80	90
DDR-240B-48	16.8~33.6	48	5	100	90

Model No. Vin (VDC) (Vout (VDC) Iout (A) R&N (mVp-p) Effi. (%) DDR-240C-24 33.6~67.2 24 10 80 91 DDR-240C-48 33.6~67.2 48 5 100 92 DDR-240D-24 67.2~154 24 10 80 92 DDR-240D-48 67.2~154 48 5 100 92.5 480W Model No. Vin (VDC) Vout (VDC) Iout (R&N (mVp-p)) Effi. (%) DDR-480B-12 16.8~33.6 12 33.4 100 90 DDR-480B-24 16.8~33.6 24 20 120 91 DDR-480B-48 16.8~33.2 48 10 150 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-24 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154						DIT LTO
DDR-240C-48 33.6~67.2 48 5 100 92 DDR-240D-24 67.2~154 24 10 80 92 DDR-240D-48 67.2~154 48 5 100 92.5 480W Model No. (Vin (VDC) (VDC) Iout (A) (MVp-p) (%) DDR-480B-12 16.8~33.6 12 33.4 100 90 DDR-480B-24 16.8~33.6 24 20 120 91 DDR-480B-48 16.8~33.2 48 10 150 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91	Model No.					
DDR-240D-24 67.2~154 24 10 80 92 DDR-240D-48 67.2~154 48 5 100 92.5 480W Model No. Vin (VDC) (VDC) Iout (A) (mVp-p) (%) DDR-480B-12 16.8~33.6 12 33.4 100 90 DDR-480B-24 16.8~33.6 24 20 120 91 DDR-480B-48 16.8~33.2 48 10 150 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 24 20 120 92	DDR-240C-24	33.6~67.2	24	10	80	91
DDR-240D-48 67.2~154 48 5 100 92.5 480W Model No. Vin (VDC) Vout (VDC) Iout (A) R&N (mVp-p) Effi. (%) DDR-480B-12 16.8~33.6 12 33.4 100 90 DDR-480B-24 16.8~33.6 24 20 120 91 DDR-480B-48 16.8~33.2 48 10 150 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 24 20 120 92	DDR-240C-48	33.6~67.2	48	5	100	92
Model No. Vin (VDC) Vout (VDC) Iout (A) R&N (mVp-p) Effi. (%) DDR-480B-12 16.8~33.6 12 33.4 100 90 DDR-480B-24 16.8~33.6 24 20 120 91 DDR-480B-48 16.8~33.2 48 10 150 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 12 33.4 100 91	DDR-240D-24	67.2~154	24	10	80	92
Model No. Vin (VDC) Vout (VDC) Iout (A) R&N (mVp-p) Effi. (%) DDR-480B-12 16.8~33.6 12 33.4 100 90 DDR-480B-24 16.8~33.6 24 20 120 91 DDR-480B-48 16.8~33.2 48 10 150 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 24 20 120 92	DDR-240D-48	67.2~154	48	5	100	92.5
DDR-480B-12 16.8~33.6 12 33.4 100 90 DDR-480B-24 16.8~33.6 24 20 120 91 DDR-480B-48 16.8~33.2 48 10 150 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 24 20 120 92	480W				NEW D	DR-480
DDR-480B-24 16.8~33.6 24 20 120 91 DDR-480B-48 16.8~33.2 48 10 150 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-12 67.2~154 24 20 120 92	Model No.					
DDR-480B-48 16.8~33.2 48 10 150 91 DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 24 20 120 92	DDR-480B-12	16.8~33.6	12	33.4	100	90
DDR-480C-12 33.6~67.2 12 33.4 100 91 DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 24 20 120 92	DDR-480B-24	16.8~33.6	24	20	120	91
DDR-480C-24 33.6~67.2 24 20 120 92 DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 24 20 120 92	DDR-480B-48	16.8~33.2	48	10	150	91
DDR-480C-48 33.6~67.2 48 10 150 92 DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 24 20 120 92	DDR-480C-12	33.6~67.2	12	33.4	100	91
DDR-480D-12 67.2~154 12 33.4 100 91 DDR-480D-24 67.2~154 24 20 120 92	DDR-480C-24	33.6~67.2	24	20	120	92
DDR-480D-24 67.2~154 24 20 120 92	DDR-480C-48	33.6~67.2	48	10	150	92
	DDR-480D-12	67.2~154	12	33.4	100	91
DDR-480D-48 67.2~154 48 10 150 93	DDR-480D-24	67.2~154	24	20	120	92
	DDR-480D-48	67.2~154	48	10	150	93



DDR-240

DC/DC Converter 30~150W Railway & ITE Enclosed Type





■ Features

- Railway & ITE dual certification
- 4:1 wide input range (RSD-30/60) 2:1 wide input range (RSD-100/150)
- 4000VDC I/O isolation
- Protections: Short circuit / Overload /

Over voltage / DC Input reverse polarity

- Fanless design
- Built-in constant current limiting circuit
- Ultra compact and 1U low profile
- All using 105°C long life electrolytic capacitors
- Half encapsulated (5G vibration)
- 3 years warranty



	-						
Model No.		RSD-30	RSD-60	RSD-100	RSD-150		
DC input range G: 9~36V, L: 18~72V, H: 40~160V B: 16.8~31.2V, C: 33.6~62.4V, D: 67.2~143V					IV, D: 67.2~143V		
Overload pro	tection	105%~135% constant currer	nt limiting, recovers automati	cally after fault condition is r	emoved		
Over voltage	protection	115%~135% Shut down O/P	voltage, re-power on to reco	ver	115%~140%		
Withstand vo	oltage	I/P-O/P: 4kVDC, I/P-FG: 2.5	kVDC, O/P-FG: 2.5kVDC, 1 r	ninute			
Isolation res	istance	100MΩ@500VDC					
Working tem	perature (min.)	-40~+70°C (refer to output of	derating curve)				
	Industrial	CB IEC62368-1, UL62368-1, AS/NZS62368.1, EAC TP TC004					
Safety standards	Railway		BS EN/EN50155: 2007—Comply with S1 level(3ms) and S2 level (10ms), refer to spec for load derating curve 2017—Comply with S1 level				
		IEC60571; EN45545-2					
EMC standards		BS EN/EN55032 class B (cla EN61000-3,-2,3, EN61000-4		BE EN/EN55032 class B (cl. EN61000-4-2,3,4,5,6,8, EAC			
Dimension (LxWxH)(mm)		113x 60x 25	128x 60x 25	161x 68x 36	189x77x <mark>36</mark>		

30W),	RSD-30
Model No.	Vin (VDC) (continuous)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
RSD-30G-3.3	9~36	3.3	6	70	84
RSD-30G-5	9~36	5	6	70	84
RSD-30G-12	9~36	12	2.5	60	86.5
RSD-30G-24	9~36	24	1.25	50	89
RSD-30L-3.3	18~72	3.3	6	70	84
RSD-30L-5	18~72	5	6	70	86
RSD-30L-12	18~72	12	2.5	60	90
RSD-30L-24	18~72	24	1.25	50	91
RSD-30H-3.3	40~160	3.3	6	70	87
RSD-30H-5	40~160	5	6	70	87
RSD-30H-12	40~160	12	2.5	60	89
RSD-30H-24	40~160	24	1.25	50	89

■ 60W					RSD-60
Model No.	Vin (VDC) (continuous)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
RSD-60G-3.3	9~36	3.3	12	60	86.5
RSD-60G-5	9~36	5	12	100	88
RSD-60G-12	9~36	12	5	50	92
RSD-60G-24	9~36	24	2.5	50	90
RSD-60L-3.3	18~72	3.3	12	60	88.5
RSD-60L-5	18~72	5	12	60	89
RSD-60L-12	18~72	12	5	50	93
RSD-60L-24	18~72	24	2.5	50	91.5
RSD-60H-3.3	40~160	3.3	12	80	87.5
RSD-60H-5	40~160	5	12	60	89
RSD-60H-12	40~160	12	5	50	92.5
RSD-60H-24	40~160	24	2.5	50	91.5

■ 100W				RSI	0-100
Model No.	Vin (VDC) (1 sec / continuous)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
RSD-100B-5	14.4~33.6 / 16.8~31.2	5	20	100	88
RSD-100B-12	14.4~33.6 / 16.8~31.2	12	8.4	120	89
RSD-100B-24	14.4~33.6 / 16.8~31.2	24	4.2	150	89
RSD-100C-5	28.8~67.2 / 33.6~62.4	5	20	100	89
RSD-100C-12	28.8~67.2 / 33.6~62.4	12	8.4	120	91
RSD-100C-24	28.8~67.2 / 33.6~62.4	24	4.2	150	91
RSD-100D-5	57.6~154 / 67.2~143	5	20	100	89.5
RSD-100D-12	57.6~154 / 67.2~143	12	8.4	120	91
RSD-100D-24	57.6~154 / 67.2~143	24	4.2	150	90

■ 150W			RSD-150			
Model No.	Vin (VDC) (1 sec / continuous)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)	
RSD-150B-5	14.4~33.6 / 16.8~31.2	5	30	100	89	
RSD-150B-12	14.4~33.6 / 16.8~31.2	12	12.5	120	90	
RSD-150B-24	14.4~33.6 / 16.8~31.2	24	6.3	150	90	
RSD-150C-5	28.8~67.2 / 33.6~62.4	5	30	100	90	
RSD-150C-12	28.8~67.2 / 33.6~62.4	12	12.5	120	92	
RSD-150C-24	28.8~67.2 / 33.6~62.4	24	6.3	150	91	
RSD-150D-5	57.6~154 / 67.2~143	5	30	100	90	
RSD-150D-12	57.6~154 / 67.2~143	12	12.5	120	92	
RSD-150D-24	57.6~154 / 67.2~143	24	6.3	150	91	



DC/DC Converter 200~500W Railway & ITE Enclosed Type MEAN WELL





Features

- Railway & ITE dual certification
- 2:1 wide input range
- 4000VDC I/O isolation
- Protections:

Short circuit / Overload / Over voltage /

DC input reverse polarity / Over temperature

- Fanless design
- Built-in constant current limiting circuit
- 1U low profile
- All using 105°C long life electrolytic capacitors
- Half encapsulated (5G vibration)
- 3 years warranty



Model No.		RSD-200	RSD-300	RSD-500				
DC input range		B: 16.8~31.2V, C: 33.6~62.4V, D: 67.2~143V,	B: 16.8~33.6V, C: 33.6~67.2V, D: 67.2~154V					
Line regulati	ion (1 sec.)	±0.5%						
Load regulat	ion (max.)	±1%						
Overload pro	otection	105%~135% constant current limiting, recovers automatically after fault condition is removed						
Over voltage protection		115%~135% Shut down O/P voltage, re-power on to recover	115%~140%	120%~145%				
Withstand vo	oltage	I/P-O/P: 4kVDC, I/P-FG: 2.5kVDC, O/P-FG: 2.5kVDC, 1 minute						
Isolation res	istance	100MΩ@500VDC						
Working tem	perature(min.)	-40~+70°C (refer to output derating cu	rve)	-40~+80°C				
	Industrial	CB IEC62368-1, UL62368-1, AS/NZS62	2368.1, EAC TP TC004					
Safety standards	Railway	BS EN/EN50155: 2007—Comply with S1 level(3ms) and S2 level (10ms), please refer to spec for load derating curve 2017—Comply with S1 level; S2 level(RSD-500)						
		IEC60571; EN45545-2						
EMC standar	ds	BS EN/EN55032 class B, EN50121-3-2, EN61000-4-2,3,4,5,6,8, EN50121-3-2						
Dimension (LxWxH)(mm)		191x 86x 40	237x 100x <mark>41</mark>					

Dimension (L)	(WxH)(mm)	191x 86	5x 40				216	3x 96.5x <mark>40</mark>	237x 100x 41				
200W					RSD	-200		300W				RSD	-300
Model No.	Vin (VD (1 sec / conti	C) nuous)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi.		Model No.	Vin (VDC) (1 sec / continuous)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
RSD-200B-12	14.4~33.6 / 16	.8~31.2	12	16.7	120	89		RSD-300D-24	57.6~154 / 67.2~143	24	12.5	150	91.5
RSD-200B-24	14.4~33.6 / 16	8~31.2	24	8.4	150	89		RSD-300D-48	57.6~154 / 67.2~143	48	6.3	180	91.5
RSD-200B-48	14.4~33.6 / 16		48	4.2	180	89		RSD-300E-5	21.6~50.4 / 25.2~46.8	5	42	100	88
RSD-200D-40	28.8~67.2 / 33		12	16.7	120	91		RSD-300E-12	21.6~50.4 / 25.2~46.8	12	25	120	90
								RSD-300E-24	21.6~50.4 / 25.2~46.8	24	12.5	150	91
RSD-200C-24	28.8~67.2 / 33		24	8.4	150	91		RSD-300E-48	21.6~50.4 / 25.2~46.8	48	6.3	180	91
RSD-200C-48	28.8~67.2 / 33		48	4.2	180	91		RSD-300F-5	43.2~100.8 / 50.4~93.6	5	42	100	89
RSD-200D-12	57.6~154 / 67	.2~143	12	16.7	120	91		RSD-300F-12	43.2~100.8 / 50.4~93.6	12	25	120	91
RSD-200D-24	57.6~154 / 67	.2~143	24	8.4	150	91		RSD-300F-24	43.2~100.8 / 50.4~93.6	24	12.5	150	91
RSD-200D-48	57.6~154 / 67	.2~143	48	4.2	180	91		RSD-300F-48	43.2~100.8 / 50.4~93.6	48	6.3	180	91.5
300W					RSD	-300		500W				RSD RSD	-500
Model No.	Vin (VD) (1 sec / conti	C) nuous)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)		Model No.	Vin (VDC) (1 sec / continuous)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
RSD-300B-5	14.4~33.6 / 16	.8~31.2	5	42	100	89		RSD-500B-12	14.4~16.8 / 16.8~33.6	12	35	100	92
RSD-300B-12	14.4~33.6 / 16	.8~31.2	12	22.5	120	89.5		RSD-500B-24	14.4~16.8 / 16.8~33.6	24	17.5	120	92
RSD-300B-24	14.4~33.6 / 16	.8~31.2	24	11.3	150	90		RSD-500B-48	14.4~16.8 / 16.8~33.6	48	8.8	150	92
RSD-300B-48	14.4~33.6 / 16	.8~31.2	48	5.7	180	91.5		RSD-500C-12	28.8~33.6 / 33.6~67.2	12	35	100	93
RSD-300C-5	28.8~67.2 / 33	.6~62.4	5	42	100	90.5		RSD-500C-24	28.8~33.6 / 33.6~67.2	24	19.2	120	93
RSD-300C-12	28.8~67.2 / 33	.6~62.4	12	25	120	91							
RSD-300C-24	28.8~67.2 / 33	.6~62.4	24	12.5	150	91.5		RSD-500C-48	28.8~33.6 / 33.6~67.2	48	9.6	150	93
RSD-300C-48	28.8~67.2 / 33	.6~62.4	48	6.3	180	92		RSD-500D-12	57.6~67.2 / 67.2~154	12	35	100	93
RSD-300D-5	57.6~154 / 67	.2~143	5	42	100	90		RSD-500D-24	57.6~67.2 / 67.2~154	24	20.8	120	93
RSD-300D-12	57.6~154 / 67	2~143	12	25	120	91.5		RSD-500D-48	57 6~67 2 / 67 2~154	48	10 4	150	93



DC/DC Converter 15~100W ITE Enclosed Type





■ Features

- 2:1 wide input range
- I/O isolation: 1500VAC (2000VAC for 15W)
- · Protections: Short circuit / Overload / Over voltage
- · Cooling by free air convection
- 2 years warranty

Model No.	SD-15	SD-25	SD-50	SD-100			
DC input range	A: 9.2~18V(9.5~15.6 for SD-100A or	nly), B: 19~36V(18~36V for S	SD-15), C: 36~72V; D: 72~14	14V (SD-100 only)			
DC adjustment range	5V: 4.5~5.5V, 12V: 11~16V, 24V: 23	5V: 4.5~5.5V, 12V: 11~16V, 24V: 23~30V (5V: 4.75~5.5V, 12V: 10.8~13.2V, 24V: 21.6~26.4V for SD-15)					
Line and load regulation (max.)	±0.5% (±0.2%~±0.5% for SD-100A only)						
Overload protection	105%~160% hiccup mode, auto-recovery	105%~150% hiccup mode,	105%~135% hiccup mode auto-recovery				
Over voltage protection	115%~135% rated output voltage	tage 115%~165% rated output voltage					
Withstand voltage	I/P-O/P: 2kVAC, I/P-FG: 1.5kVAC, 1	minute	I/P-O/P: 1.5kVAC, I/P-FG:	2kVAC, 1 minute			
Working temperature	-10~+60°C (refer to output derating	curve)					
Safety standards	AS/NZ62368.1, EAC TP TC 004; CB TUV BS EN/EN62368-1 approved(SD-100 D type only); design refer to IEC62368-1(SD-100 A type only)						
EMC standards	AS/NZS62368.1(SD-50 only), BS EN	I/EN55032 class B, EN61000	0-4-2,3,4,6,8, EAC TP TC 02	0			
Dimension (LxWxH) (mm) 78x 51x 28 99x 97x 36 159x 97x 38 199x 98x 3				199x 98x 38			
	1		1				

■ 15W					CAC C
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
SD-15A-5	9.2~18	5	3	100	68
SD-15A-12	9.2~18	12	1.25	120	72
SD-15A-24	9.2~18	24	0.625	150	70
SD-15B-5	18~36	5	3	100	76
SD-15B-12	18~36	12	1.25	120	76
SD-15B-24	18~36	24	0.625	150	77
SD-15C-5	36~72	5	3	100	75
SD-15C-12	36~72	12	1.25	120	79
SD-15C-24	36~72	24	0.625	150	78

25W				A EAL	FACE
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
SD-25A-5	9.2~18	5	5	100	71
SD-25A-12	9.2~18	12	2.1	120	72
SD-25A-24	9.2~18	24	1.1	150	75
SD-25B-5	19~36	5	5	100	72
SD-25B-12	19~36	12	2.1	120	75
SD-25B-24	19~36	24	1.1	150	78
SD-25C-5	36~72	5	5	100	74
SD-25C-12	36~72	12	2.1	120	78
SD-25C-24	36~72	24	1.1	150	81

■ 50W							
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)		
SD-50A-5	9.2~18	5	10	100	70		
SD-50A-12	9.2~18	12	4.2	120	72		
SD-50A-24	9.2~18	24	2.1	150	74		
SD-50B-5	19~36	5	10	100	73		
SD-50B-12	19~36	12	4.2	120	75		
SD-50B-24	19~36	24	2.1	150	80		
SD-50C-5	36~72	5	10	100	76		
SD-50C-12	36~72	12	4.2	120	78		
SD-50C-24	36~72	24	2.1	150	83		
■ 100W					UK C C		

■ 100W			(Date:)		ĽKC€
Model No.	Vin (VDC)	Vout (VDC)	(D type) Iout (A)	R&N (mVp-p)	Effi. (%)
SD-100A-5	9.5~18	5	18	100	78
SD-100A-12	9.5~18	12	8.5	120	82
SD-100A-24	9.5~18	24	4.2	150	84
SD-100B-5	19~36	5	20	100	74
SD-100B-12	19~36	12	8.5	120	75
SD-100B-24	19~36	24	4.2	150	78
SD-100C-5	36~72	5	20	100	75
SD-100C-12	36~72	12	8.5	120	77
SD-100C-24	36~72	24	4.2	150	81
SD-100D-5	72~144	5	20	100	76
SD-100D-12	72~144	12	8.5	120	80
SD-100D-24	72~144	24	4.2	150	83



DC/DC Converter 150~1000W ITE Enclosed Type





■ Features

- 2:1 wide input range (4:1 input for SD-500/1000)
- I/O Isolation: 1500VAC, 2000VAC (SD-500/1000)
- Protections: Short circuit / Overload / Over voltage /

Over temperature (except for SD-150) / Input polarity (SD-500 only)

• Fanless design , cooling by free air convection (SD-150/200), forced air cooling by built-in DC fan (SD-350/500/1000)

- DC input active surge current limiting (SD-500)
- Output OK signal (SD-500/1000)
- 1U low profile 41mm (SD-1000)
- 12V / 0.25A auxiliary output (SD-500/1000)
- Built-in remote ON/OFF control and remote sense (SD-500/1000)
- 2 years warranty, 3 years warranty (SD-500/1000)

Model No.	SD-150	SD-200	SD-350	SD-500	SD-1000		
DC input range	B: 19~36V, C: 36~72V, D: 72~144V L: 19~72V, H: 72~144V						
Vout adjustment range	12V: 11~16V, 24V: 23~30V	5V: 4.5~5.5V, 12\ 24V: 23~30V, 48V		12V: 11~15V, 24V: 23~30V, 48V: 46~60V			
Line and load regulation (max.)	±0.5%		±0.2%~±0.5%	±0.5%			
Overload protection	105%~135% hiccup mode, auto-recovery	105%~135% shut re-power on to re	,		105%~125% constant current limiting, shut off after 5 sec., re-power on to recover		
Over voltage protection	130%~165%	110%~167% rated	l output voltage	130%~160% rated output voltage			
Withstand voltage	I/P-O/P: 1.5kVAC, I/P-FG: 2	2kVAC, O/P-FG: 0.	5kVAC	I/P-O/P: 2kVAC, I/P-FG: 2kVAC, O/P-FG: 0.5kVAC			
Working temperature	-10~+60°C	-20~+60°C					
Safety standards	, ,,	CB IEC62368-1(D type only), TUV BS EN/EN62368-1(D Type only) AS/NZS62368.1, EAC TP TC004 appoved			CB IEC62368-1, TUV BS EN/EN62368-1, AS/NZ62368.1 EAC TP TC004 approved		
EMC standards	BS EN/EN55032 class B, E	N61000-4-2,3,4,6,8	B, EAC TP TC 020	'			
Dimension (LxWxH) (mm)	199x 110x 50	215x 115x 50 295x 127x 41			295x 127x 41		

■ 150W			CB		PR CE
		(D type) (SD-	·150D)	
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
SD-150B-12	19~36	12	12.5	120	75
SD-150B-24	19~36	24	6.3	150	77
SD-150C-12	36~72	12	12.5	120	77
SD-150C-24	36~72	24	6.3	150	80
SD-150D-12	72~144	12	12.5	120	79
SD-150D-24	72~144	24	6.3	150	82

200W	CB (D type	(SD-200D)	C SU (SD-200C-5/12		CH C€
Model No.	Vin (VDC)	Vout (VDC)	Iout (A)	R&N (mVp-p)	Effi. (%)
SD-200B-5	19~36	5	34	100	79
SD-200B-12	19~36	12	16.7	120	82
SD-200B-24	19~36	24	8.4	150	85
SD-200B-48	19~36	48	4.2	200	86
SD-200C-5	36~72	5	40	100	81
SD-200C-12	36~72	12	16.7	120	84
SD-200C-24	36~72	24	8.4	150	86
SD-200C-48	36~72	48	4.2	200	86
SD-200D-5	72~144	5	40	100	82
SD-200D-12	72~144	12	16.7	120	82
SD-200D-24	72~144	24	8.4	150	84
SD-200D-48	72~144	48	4.2	200	90


■ 350W		C	B ()		CA CE
Model No. SD-350B-5 SD-350B-12 SD-350B-24 SD-350B-48 SD-350C-5 SD-350C-12 SD-350C-24 SD-350C-48 SD-350D-5 SD-350D-12 SD-350D-12	Vin (VDC) 19~36 19~36 19~36 19~36 36~72 36~72 36~72 36~72 72~144 72~144	Vout (VDC) 5 12 24 48 5 12 24 48 5 12 24 48 5 12 24	ype) (SD-35 Iout (A) 57 27.5 14.6 7.3 60 27.5 14.6 7.3 60 29.2 14.6	R&N (mVp-p) 100 120 150 200 150 200 150 200 150 200 150 200 150 200 150 150 150 150 150 150 150 150 150 1	Effi. (%) 74 80 80 84 76 81 81 82 78 83 87
SD-350D-48 500W Model No.	72~144 Vin	Vout	7.3 CB	R&N	89 Effi.
SD-500L-12 SD-500L-24 SD-500L-48 SD-500H-12 SD-500H-24 SD-500H-48	(VDC) 19~72 19~72 19~72 72~144 72~144 72~144	(VDC) 12 24 48 12 24 48	(A) 40 21 10.5 40 21 10.5	(mVp-p) 150 150 150 150 150 150	(%) 86 88 89 87 89
■ 1000W		(CB		E¥ (€
Model No. SD-1000L-12 SD-1000L-24 SD-1000L-48 SD-1000H-12 SD-1000H-24 SD-1000H-24	Vin (VDC) 19~72 19~72 19~72 72~144 72~144	Vout (VDC) 12 24 48 12 24 48	Iout (A) 60 40 21 60 40 21	R&N (mVp-p) 150 150 150 150 150	Effi. (%) 84 88 90 85 89



DC/DC Converter 8~10W Railway DIP Module Type MEAN WELL





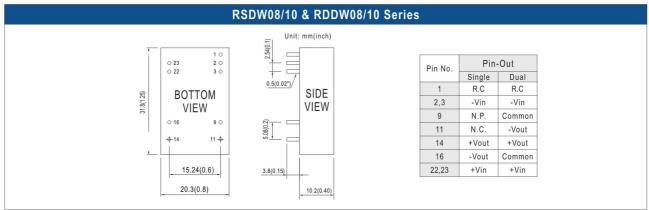

■ DIP24 Package	, Regulated 8W, 4:1	V _{in} , Single V _{out}			RSDW08 [L
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
RSDW08F-03		3.3V	2000mA		
RSDW08F-05	12V, 24V	5V	1600mA	1.5KVDC	-40~+85°C
RSDW08F-12	(9~36V)	12V	666mA	1.50000	-40~+65 C
RSDW08F-15		15V	530mA		
RSDW08G-03		3.3V	2000mA		
RSDW08G-05	24V, 48V	5V	1600mA	1.5KVDC	-40~+85°C
RSDW08G-12	(18~75V)	12V	666mA	1.5KVDC	-40-+00 C
RSDW08G-15		15V	530mA		

■ DIP24 Package, I	Regulated 8W, 4:1	V _{in} , Dual V _{out}		ı	RDDW08 [# LK CE (EN50155/EN55032)
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
RDDW08F-05	401/ 041/	±5V	±800mA		
RDDW08F-12	12V, 24V (9~36V)	±12V	±333mA	1.5KVDC	-40~+85°C
RDDW08F-15	(9-307)	±15V	±265mA		
RDDW08G-05	041/ 401/	±5V	±800mA		
RDDW08G-12	24V, 48V (18~75V)	±12V	±333mA	1.5KVDC	-40~+85°C
RDDW08G-15	(10 700)	±15V	±265mA		

■ DIP24 Packag	e, Regulated 10W, 4:1	V _{in} , Single V _{out}		F	RSDW10 [CA C E (EN55015/EN55032)
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
RSDW10H-03		3.3V	2500mA		
RSDW10H-05	72V, 96V, 110V	5V	2000mA	3KVDC	-40~+85°C
RSDW10H-12	(43~160V)	12V	835mA	SKVDC	-40~+65 C
RSDW10H-15		15V	666mA		

■ DIP24 Packag	ge, Regulated 10W, 4:	1 V _{in} , Dual V _{out}		F	RDDW10 [FILES CE
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
RDDW10H-05	701/ 001/ 4401/	±5V	±1000mA		
RDDW10H-12	72V, 96V, 110V (43~160V)	±12V	±416mA	3KVDC	-40~+85°C
RDDW10H-15	(40 1007)	±15V	±333mA		



DC/DC Converter 20W Railway 2"x1" Module Type









RSDW20F&G / RDDW20F&G Series RSDW20H / RDDW20H / RSDW20UW / RDDW20UW Series 25.4(1) Unit: mm(inch) Unit: mm(inch) 10.16(0.4), 10.16(0.4) 2.5(0.1) 15.2(0.6) Pin-Out Pin-Out Pin No. Pin No Single Dual Single Dual 45.72(1.8) 20.32(0.8) 50.8(2) ВОТТОМ SIDE +Vin 50.8(2) воттом SIDE 2 -Vin VIEW VIEW 2 -Vin VIEW 3 +Vout 3 +Vout 4 -Vout 1(0.04) Trim Common 4 Trim 1(0.04) 5 -Vout Common 5 -Vout Remote ON/OFF 6 10.2(0.4) 10.16(0.4) 10.16(0.4) 6 Remote ON/OFF 5.08(0.2) 5.6(0.22 min 25.4(1) 15.24(0.6) 5.6(0.22 min.)

EHI EK CE ■ 2"x1" Package, Regulated 20W, 4:1 V_{in}, Single V_{out} RSDW20 Model No. Vin Vout lout Isolation voltage Operating temperature RSDW20F-03 3.3V 5500mA RSDW20F-05 5V 4000mA 12V, 24V 1.5KVDC -40~+85°C RSDW20F-12 (9~36V) 12V 1670mA RSDW20F-15 15V 1330mA RSDW20G-03 3.3V 5500mA RSDW20G-05 24V, 48V 5V 4000mA 1.5KVDC -40~+85°C RSDW20G-12 (18~75V) 12V 1670mA RSDW20G-15 15V 1330mA RSDW20H-05 5V 4000mA 22V, 96V, 110V 12V 3KVDC -40~+85°C RSDW20H-12 1670mA (43~160V) RSDW20H-15 15V 1330mA [O] UK CC 2"v4" Dookens Dogulated 20W 4.4 V DDDWan

■ 2"x1" Package,	Regulated 20W, 4:	1 V _{in} , Dual V _{out}		RDDW	20 [III CA CE (EN50155/EN550
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
RDDW20F-05	401/ 041/	±5V	±2000mA		
RDDW20F-12	12V, 24V (9~36V)	±12V	±835mA	1.5KVDC	-40~+85°C
RDDW20F-15	(3 304)	±15V	±666mA		
RDDW20G-05		±5V	±2000mA		
RDDW20G-12	24V, 48V (18~75V)	±12V	±835mA	1.5KVDC	-40~+85°C
RDDW20G-15	(10-750)	±15V	±666mA		
RDDW20H-12	72V. 96V. 110V	±12V	±1833mA		
RDDW20H-15	(43~160V)	+15V	+667mA	3KVDC	-40~+85°C

ŀ	Z XI Tackage,	inegulated 2011, 10	- RODII	(EN50155		
	Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
	RSDW20UW-05	12V, 24V, 48V	5V	4000mA		
	RSDW20UW-12	72V, 96V, 110V	12V	1670mA	3KVAC	-40~+90°C
	RSDW20UW-15	(8.5~160V)	15V	1330mA		
-						
L	■ 2"x1" Package,	Regulated 20W, 18:	1 V _{in} , Dual V _{out}		RDDW:	20UW ₽ ₽ \$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
						(EN50155)

					(EN50155
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
RDDW20UW-12	12V, 24V, 48V	±12V	±833mA		
RDDW20UW-15	72V, 96V, 110V	±15V	±667mA	3KVAC	-40~+90°C
RDDW20UW-24	(8.5~160V)	±24V	±417mA		

2"v1" Package Regulated 20W 18:1 V. Single V.

RSDW2011W . TILLE C F

DC/DC Converter 40~60W Railway 2"x1" Module Type





RSDW40/RDDW40 (2"x 1"x 0.41")



RSDW60/RDDW60 (2"x 1"x 0.41")




RSDW40/60 & RDDW40/60 Series Unit: mm(inch) 50.8(2) 45.72(1.8) 2.5(0.1) Pin-Out Pin No. Single Dual Bottom View +Vin 2 -Vin 5.1(0.2) 3 Remote ON/OFF 4 5 -Vout Common 6 Trim -Vout Side View

2"x1" Package,	Regulated 40W, 4:1	V _{in} , Single V _{out}		RSDW4	0 [H
Model No.	Vin	Vout	lout	loolotion voltage	
RSDW40F-03 RSDW40F-05 RSDW40F-12 RSDW40F-15	12V, 24V (9~36V)	3.3V 5V 12V 15V	10A 8A 3333mA 2666mA	Isolation voltage	Operating temperature
RSDW40G-03 RSDW40G-05 RSDW40G-12 RSDW40G-15	24V, 48V (18~75V)	3.3V 5V 12V 15V	10A 8A 3333mA 2666mA	1.6KVDC	-40~+90°C
RSDW40H-05 RSDW40H-12 RSDW40H-24 RSDW40H-48	72V, 96V, 110V (40~160V)	5V 12V 24V 48V	8A 3333mA 1667mA 833mA	3KVDC	-40~+90°C
"x1" Package,	Regulated 40W, 4:1	V _{in} , Dual V _{out}		RDDW4	
Model No.	Vin	Vout	lout	Isolation voltage	(EN50155/EN550
RDDW40F-12 RDDW40F-15	12V, 24V (9~36V)	±12V ±15V	±1666mA ±1333mA	1.6KVDC	-40~+90°C
RDDW40G-12 RDDW40G-15	24V, 48V (18~75V)	±12V ±15V	±1666mA ±1333mA	1.6KVDC	-40~+90°C
2"x1" Package,	Regulated 60W, 4:1	V _{in} , Single V _{out}		RSDW6	0 [¶ UK C€ (EN50155/EN55
Model No.	V_{in}	Vout	lout	Isolation voltage	Operating temperature
RSDW60F-03 RSDW60F-05 RSDW60F-12 RSDW60F-15 RSDW60F-24	12V, 24V (9~36V)	3.3V 5V 12V 15V 24V	12A 12A 5A 4A 2.5A	1.6KVDC	-40~+85°C
RSDW60G-03 RSDW60G-05 RSDW60G-12 RSDW60G-15 RSDW60G-24	24V, 48V (18~75V)	3.3V 5V 12V 15V 24V	12A 12A 5A 4A 2.5A	1.6KVDC	-40~+85°C
RSDW60H-05 RSDW60H-12 RSDW60H-24 RSDW60H-48	72V, 96V, 110V (40~160V)	5V 12V 24V 48V	12A 5A 2.5A 1.25A	3KVDC	-40~+85°C
2"x1" Package,	Regulated 60W, 4:1	V _{in} , Dual V _{out}		RDDW6	60 [H
Model No.	V in	Vout	lout	Isolation voltage	Operating temperature
RDDW60F-12 RDDW60F-15	12V, 24V (9~36V)	±12V ±15V	±2.5A ±2.0A	1.6KVDC	-40~+85°C
RDDW60G-12 RDDW60G-15	24V, 48V (18~75V)	±12V ±15V	±2.5A ±2.0A	1.6KVDC	-40~+85°C

DC/DC Converter 1~2W Medical Grade SIP Module Type





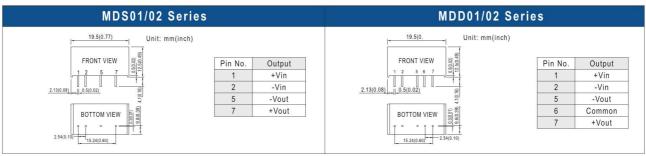

SIP7, Medical G	rade Unregulated 1	W, ±10% V _{in} , Sing	Jle Vout		MDS01 PUSCACE
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
MDS01L-03 MDS01L-05 MDS01L-12 MDS01L-15	5V (4.5~5.5V)	3.3V 5V 12V 15V	303mA 200mA 84mA 67mA	6KVDC	-40~+85°C
MDS01M-05 MDS01M-12 MDS01M-15	12V (10.8~13.2V)	5V 12V 15V	200mA 84mA 67mA	6KVDC	-40~+85°C
MDS01N-05 MDS01N-12 MDS01N-15	24V (21.6~26.4V)	5V 12V 15V	200mA 84mA 67mA	6KVDC	-40~+85°C
SIP7, Medical G	rade Unregulated 1	W, ±10% V _{in} , Dua	 V out		MDD01 c SU US CACE
Model No.	V_{in}	V _{out}	l _{out} +100mΔ	Isolation voltage	Operating temperature

Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
MDD01L-05 MDD01L-09 MDD01L-12 MDD01L-15	5V (4.5~5.5V)	±5V ±9V ±12V ±15V	±100mA ±56mA ±42mA ±34mA	6KVDC	-40~+85°C
MDD01M-05 MDD01M-09 MDD01M-12 MDD01M-15	12V (10.8~13.2V)	±5V ±9V ±12V ±15V	±100mA ±56mA ±42mA ±34mA	6KVDC	-40~+85°C
MDD01N-05 MDD01N-09 MDD01N-12 MDD01N-15	24V (21.6~26.4V)	±5V ±9V ±12V ±15V	±100mA ±56mA ±42mA ±34mA	6KVDC	-40~+85°C

SIP7, Medical G	rade Unregulated 2	$W, \pm 10\% V_{in}, Sing$	le Vout		MDS02 CACE
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
MDS02L-05 MDS02L-12 MDS02L-15	5V (4.5~5.5V)	5V 12V 15V	400mA 167mA 133mA	6KVDC	-40~+85°C
MDS02M-05 MDS02M-12 MDS02M-15	12V (10.8~13.2V)	5V 12V 15V	400mA 167mA 133mA	6KVDC	-40~+85°C
MDS02N-05 MDS02N-12 MDS02N-15	24V (21.6~26.4V)	5V 12V 15V	400mA 167mA 133mA	6KVDC	-40~+85°C

SIP7, Medical G	rade Unregulated 2	W, ±10% V _{in} , Dua	V out		MDD02 CACE
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
MDD02L-05 MDD02L-09 MDD02L-12 MDD02L-15	5V (4.5~5.5V)	±5V ±9V ±12V ±15V	±200mA ±111mA ±83mA ±67mA	6KVDC	-40~+85°C
MDD02M-05 MDD02M-09 MDD02M-12 MDD02M-15	12V (10.8~13.2V)	±5V ±9V ±12V ±15V	±200mA ±111mA ±83mA ±67mA	6KVDC	-40~+85°C
MDD02N-05 MDD02N-09 MDD02N-12 MDD02N-15	24V (21.6~26.4V)	±5V ±9V ±12V ±15V	±200mA ±111mA ±83mA ±67mA	6KVDC	-40~+85°C



DC/DC Converter 3~6W Medical Grade DIP Module Type













(1.25"x 0.8"x 0.48")

MDD03 (1.25"x 0.8"x 0.48")

(1.25"x 0.8"x 0.48")

MDD06 (1.25"x 0.8"x 0.48")

MDS03/06 Series		MDD03/06 Se	eries
Unit: mm(inch)		Pin-Out	
2.24(0.1	Pin No.	MDS03/06 (Single output)	MDD03/06 (Dual output)
+ 24 + 23 0.6(0.02°)/	1	+Vin	+Vin
<u>82</u>	10	No pin	No pin
Bottom View Side View	11	No pin	Common
	12	-Vout	No pin
*15 10 * 10 * 11 * 12 * 12 * 12 * 12 * 12 *	13	+Vout	-Vout
	15	No pin	+Vout
15.24(0.60) 12.2(0.48) 20.3(0.80)	23,24	-Vin	-Vin

D I	P 24, Medical Grad	e Regulated 3W, 4:1	Vin, Single Vout			MDS03 [HI CAC	
	Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature	
	MDS03F-05	4017 4017	5V	600mA			
	MDS03F-12	12V, 48V (9~36V)	12V	250mA	6KVDC	-40~+90 °C	
	MDS03F-15		15V	200mA			
	MDS03G-05		5V	600mA			
	MDS03G-12	24V, 48V (18~75V)	12V	250mA	6KVDC	-40~+90 C	
	MDS03G-15	(10.00)	15V	200mA			

■ DIP 24, Medical	Grade Regulated 3\	N, 4:1 Vin, Dual Vout			MDD03 [HI CKC	\in
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature	
MDD03F-05		±5V	±300mA			
MDD03F-12	12V, 24V (9~36V)	±12V	±125mA	6KVDC	-40~+90 °C	
MDD03F-15	(= ===)	±15V	±100mA			
MDD03G-05		±5V	±300mA			
MDD03G-12	24V, 48V (18~75V)	±12V	±125mA	6KVDC	-40~+90°C	
MDD03G-15		±15V	±100mA			

■ DIP 24, Medical	Grade Regulated 6	W, 4:1 V _{in} , Single	Vout		MDS06	HI FRC€
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating tem	perature
MDS06F-05		5V	1200mA			
MDS06F-12	12V, 24V (9~36V)	12V	500mA	6KVDC	-40~+90	C
MDS06F-15	(0 00.7	15V	400mA			
MDS06G-05	21/22/	5V	1200mA			
MDS06G-12	24V, 28V (18~75V)	12V	500mA	6KVDC	-40~+90	C
MDS06G-15	(15V	400mA			


■ DIP 24, Medical	Grade Regulated 6	W, 4:1 V _{in} , Dual V _{out}			MDD06 [⊞UK)CE		
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature		
MDD06F-05		±5V	±600mA				
MDD06F-12	12V, 24V (9~36V)	±12V	±250mA	6KVDC	-40~+90°C		
MDD06F-15	, ,	±15V	±200mA				
MDD06G-05		±5V	±600mA				
MDD06G-12	24V, 48V (18~75V)	±12V	±250mA	6KVDC	-40~+90°C		
MDD06G-15	(10 100)	±15V	±200mA				



DC/DC Converter 15~20W Medical Grade 2"x1" Module Type





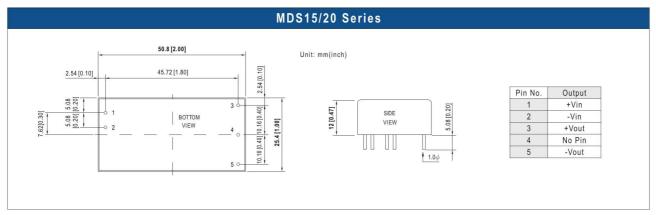


DIP7, Medical G	rade Regulated 15W,	2:1 V _{in} , Single	Vout		MDS15 [H[UKC€	
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature	
MDS15A-05		5V	3000mA			
MDS15A-12	12V	12V	1250mA	4KVAC	-40~+90°C	
MDS15A-15	(9~18V)	15V	1000mA	41.440	-40~+90 C	
MDS15A-24		24V	625mA			
MDS15B-05		5V	3000mA			
MDS15B-12	24V	12V	1250mA	4KVAC	-40~+90°C	
MDS15B-15	(18~36V)	15V	1000mA	4KVAC	-40~+90°C	
MDS15B-24		24V	625mA			
MDS15C-05		5V	3000mA			
MDS15C-12	48V	12V	1250mA	41///4.0	-40~+90°C	
MDS15C-15	(36~75V)	15V	1000mA	4KVAC	-40~+90 C	
MDS15C-24		24V	625mA			
MDS15C-24		24V	625mA			

■ DIP7, Medical G	rade Regulated 20V	V, 2:1 V _{in} , Single V _{ou}	t		MDS20 [⊞[UKC€	
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature	
MDS20A-05		5 V	4000mA			
MDS20A-12	12V	12V	1670mA	4KVAC	40-100°C	
MDS20A-15	(9~18V)	15V	1333mA	4KVAC	-40~+90°C	
MDS20A-24		24V	833mA			
MDS20B-05		5V	4000mA			
MDS20B-12	24V	12V	1670mA	444.0	40	
MDS20B-15	(18~36V)	15V	1333mA	4KVAC	-40~+90°C	
MDS20B-24		24V	833mA			
MDS20C-05		5V	4000mA			
MDS20C-12	48V	12V	1670mA			
MDS20C-15	(36~75V)	15V	1333mA	4KVAC	-40~+90°C	
MDS20C-24		24V	833mA			

DC/DC Converter Non-Isolated 1A&12A Ultra Compact SMD Type






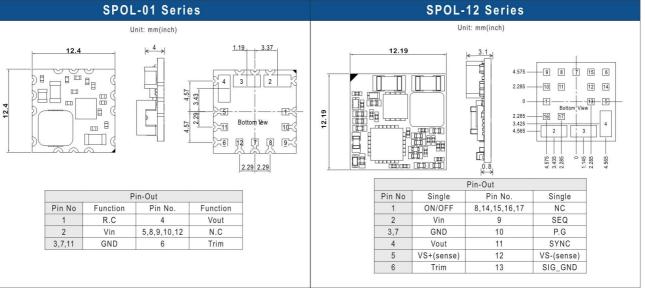

■ 1A, Non-	-isolated	SPC	DL-01	EHI CKC€	
Model No.	V_{in}	V_{out}	lout	Operating	g temperature
SPOL-01	Nom. 12V (3~14V)	Nom.5V (0.9~5.5V Programmable)	1A	-40	~+82°C

16	Γ	1		r	-	- 1	1	1	T	1	T	T	_
14	H	i		į	i	i	÷	1	÷	÷	i	+	Upp
12	-	-			ł.		-+		+		÷		j-:
10	-	+			+		-+		-		+		
8	-	į	-	-	į.		-ļ		÷		÷	į	Low
6	-	į		į.	÷.	j-	-¦	- i	4	بنيا	+		4-
4 3 2				ŀ	ŀ	4	+		+	- -	÷		-
2	-	į		ŀ.	1.				-ŀ		÷		-
0	L	1		.5	2	2.5	1	3.5	4	4.5	1	5.5	6

■ 1A, Non-	isolated		SPC	DL-12	EHI ₽₽C €
Model No.	V_{in}	V_{out}	lout	Operatin	g temperature
SPOL-12 = P,N; P:Positiv	Nom. 12V (3~14V) e, N:Negative	Nom.5V (0.6~5.5V Programmable)	12A	-40)~+90°C




Packing	Reel Packing	Package: 1 Tape Reel = 650 or 850 pcs 30.4 max	Carton accommodates 1 Tage Reel = 650 or 850 converter 2 boxes 1300 converters per carton
	MPQ Per Reel (PCS)	SPOL-01	650
		SPOL-12	850



DC/DC Converter Non-Isolated 1A switching Regulator






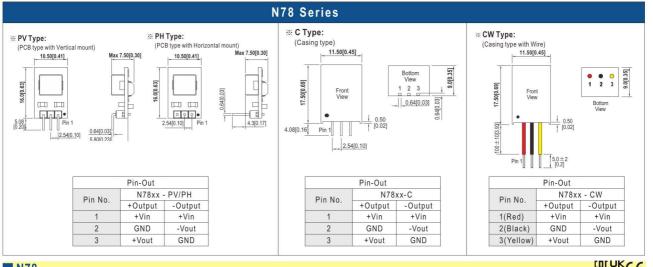


■ N78				EHI SPC €
Model No.	V_{in}	V_{out}	lout	Operating temperature
N7803-1□	12V (6~36V)	3.3V	1000mA	
N7805-1 □	12V (8~36V)	5 V	1000mA	
N/0U3-1□	12V (8~27V)	-5V	500mA	- - ·
N7809-1 🗆	24V (13~36V)	9V	1000mA	40~+85°C
	24V (16~36V)	12V	1000mA	
N7812-1□	12V (8~20V)	-12V	1000mA	
N7815-1 □	24V (20~36V)	15V	1000mA	
N/013-1	12V (8~18V)	-15V	300A	
=PV, PH, C, CW				

■Typical Applications

Positive output application circuit



Negative output application circuit






DC/DC Converter 1W SMD Module Type







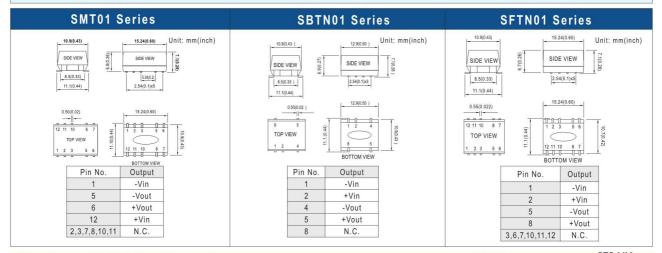

Regulated 1W	l, 2:1 V _{in} , Sing	jle V _{out}		NEW SMT01	EHI FRC€
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
SMT01A-05 SMT01A-12 SMT01A-15	12V (9~18V)	5V 12V 15V	200mA 83mA 67mA	1.5KVDC	-40~+90°C
SMT01B-05 SMT01B-12 SMT01B-15	24V (18~36V)	5V 12V 15V	200mA 83mA 67mA	1.5KVDC	-40~+90°C
SMT01C-05 SMT01C-12 SMT01C-15	48V (36~72V)	5V 12V 15V	200mA 83mA 67mA	1.5KVDC	-40~+90°C

Unregulated *	IW, ±10% V _{in} ,	Single Vout		SBTN01	c S us [H[CB \(\) C \(\)
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
SBTN01L-05 SBTN01L-09 SBTN01L-12 SBTN01L-15	5V (4.5~5.5V)	5V 9V 12V 15V	200mA 111mA 84mA 67mA	1.5KVDC	-40~+90°C
SBTN01M-05 SBTN01M-09 SBTN01M-12 SBTN01M-15	12V (10.8~13.2V)	5V 9V 12V 15V	200mA 111mA 84mA 67mA	1.5KVDC	-40~+90°C
SBTN01N-05 SBTN01N-09 SBTN01N-12 SBTN01N-15	24V (21.6~26.4V)	5V 9V 12V 15V	200mA 111mA 84mA 67mA rotection (optional mod	1.5KVDC	-40~+90°C

Unregulated	1W, ±10% V _{in} ,	Single V _{out}		SFTN01	c N °us[∏[CBUKC€
Model No.	V_{in}	Vout	lout	Isolation voltage	Operating temperature
SFTN01L-05		5V	200mA		
SFTN01L-09	5V	9V	111mA	3KVDC	-40~+90°C
SFTN01L-12	(4.5~5.5V)	12V	84mA	SKVDC	-40~+90 C
SFTN01L-15		15V	67mA		
SFTN01M-05		5V	200mA		
SFTN01M-09	12V	9V	111mA	21/1/DC	40 +00%0
SFTN01M-12	(10.8~13.2V)	12V	84mA	3KVDC	-40~+90°C
SFTN01M-15		15V	67mA		
SFTN01N-05		5V	200mA		
SFTN01N-09	24V	9V	111mA	21/1/100	40 +00%0
SFTN01N-12	(21.6~26.4V)	12V	84mA	3KVDC	-40~+90°C
SFTN01N-15		15V	67mA		
▶-40~+105°C oper	rating temperature	with continuous short pro	tection (optional mod	del for SFTN01x-xxSC).	




DC/DC Converter 1~2W SMD Module Type









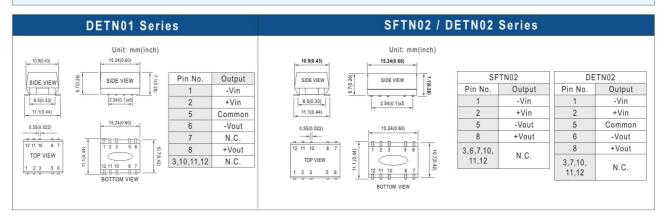

Unregulated 1W, :	±10% V _{in} , Dual V	out		DETN01	CBCACE
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
DETN01L-05	5) (±5V	±100mA		
DETN01L-12	5V (4.5~5.5V)	±12V	±42mA	3KVDC	-40~+90°C
DETN01L-15	(4.0 0.00)	±15V	±34mA		
DETN01M-05		±5V	±100mA		
DETN01M-12	12V (10.8~13.2V)	±12V	±42mA	3KVDC	-40~+90°C
DETN01M-15	(10.0-13.24)	±15V	±34mA		
DETN01N-05		±5V	±100mA		
DETN01N-12	24V (21.6~26.4V)	±12V	±42mA	3KVDC	-40~+90°C
DETN01N-15	(21.0-20.47)	±15V	±34mA		
▶-40~+105°C operating	temperature with contin	nuous short prote	ction (optional mode	I for DETN01x-xxSC)	

■ Unregulated 2W,	±10% V _{in} , Single	Vout		SFTN02	ENI EK C€
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
SFTN02L-05	5) /	5V	400mA		
SFTN02L-12	5V (4.5~5.5V)	12V	167mA	3KVDC	-40~+100°C
SFTN02L-15	(4.0 0.00)	15V	133mA		
SFTN02M-05	4014	5V	400mA		
SFTN02M-12	12V (10.8~13.2V)	12V	167mA	3KVDC	-40~+100°C
SFTN02M-15	(10.0 - 13.2 V)	15V	133mA		
SFTN02N-05	0.114	5V	400mA		
SFTN02N-12	24V (21.6~26.4V)	12V	167mA	3KVDC	-40~+100°C
SFTN02N-15	(21.0-20.47)	15V	133mA		
▶-40~+105°C operating	temperature with contin	uous short prote	ection (optional model	for SFTN02-x-xxSC).	

■ Unregulated 2W, ±	±10% V _{in} , Dual V	ut		DETN02	[A[FRC€
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
DETN02L-05	5)/	±5V	±200mA		
DETN02L-12	5V (4.5~5.5V)	±12V	±84mA	3KVDC	-40~+100°C
DETN02L-15	(4.0 0.00)	±15V	±67mA		
DETN02M-05		±5V	±200mA		
DETN02M-12	12V (10.8~13.2V)	±12V	±84mA	3KVDC	-40~+100°C
DETN02M-15	(10.0-13.24)	±15V	±67mA		
DETN02N-05	0.01	±5V	±200mA		
DETN02N-12	24V (21.6~26.4V)	±12V	±84mA	3KVDC	-40~+100°C
DETN02N-15	(21.0 20.47)	±15V	±67mA		
▶-40~+105°C operating	temperature with contin	uous short prote	ction (optional model	for DETN02x-xxSC).	



DC/DC Converter 1~2W SIP Unregulated Module Type












(0.77"x 0.24"x 0.4") 5/12Vin (0.77"x 0.28"x 0.4") 24Vin

DPU01 (0.77"x 0.24"x 0.4") 5/12Vin (0.77"x 0.28"x 0.4") 24Vin

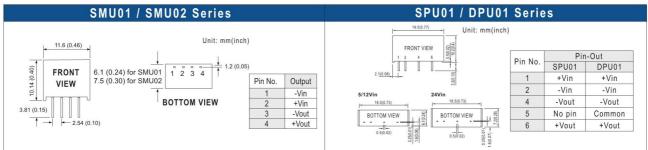

			0.5(0.02)	0.5(0.02)	
SIP4, Unregulat	ed 1W, ±10% V _{in} , S	ingle V _{out}		SMU	IN FE HACE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SMU01L-05 SMU01L-09 SMU01L-12 SMU01L-15	5V (4.5~5.5V)	5V 9V 12V 15V	200mA 110mA 84mA 67mA	1.5KVDC	-40~+90°C
SMU01M-05 SMU01M-09 SMU01M-12 SMU01M-15	12V (10.8~13.2V)	5V 9V 12V 15V	200mA 110mA 84mA 67mA	1.5KVDC	-40~+90°C
SMU01N-05 SMU01N-09 SMU01N-12 SMU01N-15	24V (21.6~26.4V)	5V 9V 12V 15V	200mA 110mA 84mA 67mA	1.5KVDC	-40~+90°C
SIP4, Unregulat	ed 2W, ±10% V _{in} , S	ingle V _{out}		SMU	12 FE CKCE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SMU02L-05 SMU02L-12 SMU02L-15	5V (4.5~5.5V)	5V 12V 15V	400mA 167mA 133mA	1.5KVDC	-40~+85°C
SMU02M-05 SMU02M-12 SMU02M-15	12V (10.8~13.2V)	5V 12V 15V	400mA 167mA 133mA	1.5KVDC	-40~+85°C
SMU02N-05 SMU02N-12 SMU02N-15	24V (21.6~26.4V)	5V 12V 15V	400mA 167mA 133mA	1.5KVDC	-40~+85°C
SIP6, Unregulat	ed 1W, ±10% V _{in} , S	ingle V _{out}		SPU0	1 ENLEKC€
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
SPU01L-05 SPU01L-12 SPU01L-15	5V (4.5~5.5V)	5V 12V 15V	200mA 84mA 67mA	1.5KVDC	-40~+90°C
SPU01M-05 SPU01M-12 SPU01M-15	12V (10.8~13.2V)	5V 12V 15V	200mA 84mA 67mA	1.5KVDC	-40~+90°C
SPU01N-05 SPU01N-12 SPU01N-15	24V (21.6~26.4V)	5V 12V 15V	200mA 84mA 67mA	1.5KVDC	-40~+90°C
SIP6, Unregulat	ed 1W, ±10% V _{in} , D	Oual V _{out}		DPU	1 ENCE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
DPU01L-05 DPU01L-12 DPU01L-15	5V (4.5~5.5V)	±5V ±12V ±15V	±100mA ±42mA ±33mA	1.5KVDC	-40~+90°C
DPU01M-05 DPU01M-12	12V (10.8~13.2V)	±5V ±12V	±100mA ±42mA	1.5KVDC	-40~+90°C



±33mA

±100mA

±42mA ±33mA 1.5KVDC

±15V

 $\pm 5 V$

±12V ±15V

DPU01M-15

DPU01N-05

DPU01N-12

DPU01N-15

(10.8~13.2V)

24V


(21.6~26.4V)

-40~+90°C

DC/DC Converter 2~3W SIP Unregulated Module Type





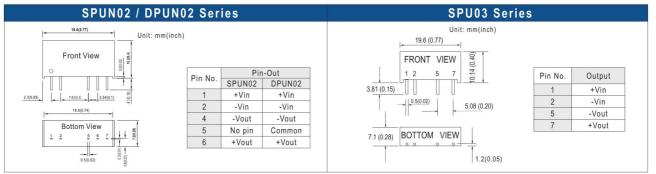

■ SIP7, Unregulate	d 2W, ±10% V _{in} , Sir	igle V _{out}			SPUN02	ENI SK C €
Model No.	Vin	Vout	out	Isolation voltage	Operating	temperature
SPUN02L-05	EV/	5V	400mA			
SPUN02L-12	5V (4.5~5.5V)	12V	167mA	3KVDC	-40~+	·105°C
SPUN02L-15	(4.0 0.00)	15V	134mA			
SPUN02M-05		5V	400mA			
SPUN02M-12	12V (10.8~13.2V)	12V	167mA	3KVDC	-40~+	-105°C
SPUN02M-15	(10.0 - 13.2 v)	15V	134mA			
SPUN02N-05		5V	400mA			
SPUN02N-12	24V (21.6~26.4V)	12V	167mA	3KVDC	-40~+	-105°C
SPUN02N-15	(21.0 20.47)	15V	134mA			


■ SIP7, Unregulate	ed 2W, ±10% V _{in} , Dua	al V _{out}			DPUN02	ENI SK C €
Model No.	Vin	Vout	lout	Isolation voltage	Operating	temperature
DPUN02L-05	5 \/	±5V	±200mA			
DPUN02L-12	5V (4.5~5.5V)	±12V	±83mA	3KVDC	-40~+	105°C
DPUN02L-15	(4.0 0.0)	±15V	±67mA			
DPUN02M-05		±5V	±200mA			
DPUN02M-12	12V (10.8~13.2V)	±12V	±83mA	3KVDC	-40~+	105°C
DPUN02M-15	(10.0 13.2 V)	±15V	±67mA			
DPUN02N-05		±5V	±200mA			
DPUN02N-12	24V (21.6~26.4V)	±12V	±83mA	3KVDC	-40~+	105°C
DPUN02N-15	(21.0 20.47)	±15V	±67mA			

■ SIP7, Unregulate	d 3W, ±10% V _{in} , Sing	gle V _{out}			SPU03 [HI FC CK C
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SPU03L-05 SPU03L-12 SPU03L-15	5V (4.5~5.5V)	5V 12V 15V	600mA 250mA 200mA	3KVDC	-40~+90°C
SPU03M-05 SPU03M-12 SPU03M-15	12V (10.8~13.2V)	5V 12V 15V	600mA 250mA 200mA	3KVDC	-40~+90°C
SPU03N-05 SPU03N-12 SPU03N-15	24V (21.6~26.4V)	5V 12V 15V	600mA 250mA 200mA	3KVDC	-40~+90°C

DC/DC Converter 1W SIP Regulated Module Type





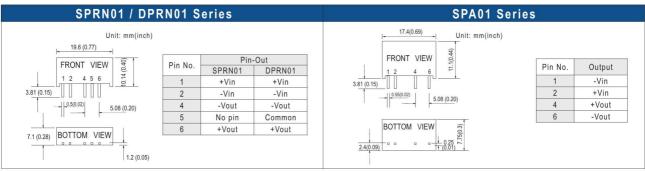

Regulated 1W, ±10	% V _{in} , Single V _{out}				SPRN01	EHI SK C€
Model No.	Vin	Vout	lout	Isolation voltage	Operatin	g temperature
SPRN01L-05	E) /	5V	200mA			
SPRN01L-12	5V (4.75~5.5V)	12V	84mA	1.5KVDC	-40	0~+90°C
SPRN01L-15	(4.70 0.00)	15V	67mA			
SPRN01M-05		5V	200mA			
SPRN01M-12	12V (11.4~13.2V)	12V	84mA	1.5KVDC	-40	0~+90°C
SPRN01M-15	(11.4~13.2V)	15V	67mA			
SPRN01N-05		5V	200mA			
SPRN01N-12	24V (22.8~26.4V)	12V	84mA	1.5KVDC	-40	0~+90°C
SPRN01N-15	(22.0~20.4 V)	15V	67mA			
SPRN010-05		5V	200mA			
SPRN010-12	48V (45.6~52.8V)	12V	84mA	1.5KVDC	-40	0~+90°C
SPRN010-15	(43.0°-32.0V)	15V	67mA			

Regulated 1W, ±1	0% V _{in} , Dual V _{out}				DPRN01	ENI SK C€
Model No.	Vin	Vout	lout	Isolation voltage	Operatin	g temperature
DPRN01L-12 DPRN01L-15	5V (4.75~5.5V)	±12V ±15V	42mA 34mA	1.5KVDC	-40)~+90°C
DPRN01M-12 DPRN01M-15	12V (11.4~13.2V)	±12V ±15V	42mA 34mA	1.5KVDC	-40)~+90°C
DPRN01N-12 DPRN01N-15	24V (22.8~26.4V)	±12V ±15V	42mA 34mA	1.5KVDC	-40)~+90°C
DPRN010-12 DPRN010-15	48V (45.6~52.8V)	±12V ±15V	42mA 34mA	1.5KVDC	-40)~+90°C

Regulated 1W, 2:1	I V _{in} , Single V _{out}				SPA01 INI ĽK C€
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
SPA01A-05	1017	5V	200mA		
SPA01A-12	12V (9~18V)	12V	83mA	1.5KVDC	-40~+90°C
SPA01A-15	(0 100)	15V	67mA		
SPA01B-05	24V	5V	200mA		
SPA01B-12	(18~36V)	12V	83mA	1.5KVDC	-40~+90°C
SPA01B-15	,	15V	67mA		
SPA01C-05	401/	5V	200mA		
SPA01C-12	48V (36~72V)	12V	83mA	1.5KVDC	-40~+90°C
SPA01C-15	(/)	15V	67mA		

DC/DC Converter 2~9W SIP Regulated Module Type















Pin No.	Pin-Out			
PIII NO.	SPAN02	DPAN02		
1	-Vin	-Vin		
2	+Vin	+Vin		
3	R.C.	R.C.		
5	N.C.	N.C.		
6	+Vout	+Vout		
7	-Vout	Common		
8	N.C.	-Vout		



Dis No	Pin	-Out
Pin No.	SPB09	DPB09
1	-Vin	-Vin
2	+Vin	+Vin
3	R.C.	R.C.
6	+Vout	+Vout
7	-Vout	Common
8	N.C.	-Vout

SIP8, Regul	ated 2W, 2:1	Vin,	Single Vout	SPAN02	ENI SK C €	
Model No.	V in	Vout	out	Isolation voltage	Operating temperature	
SPAN02E-03		3.3V	500mA			
SPAN02E-05	5V	5V	400mA	1.5KVDC	-40~+90°C	
SPAN02E-12	(4.5~9V)	12V	167mA	1.5KVDC	-40~+90 C	
SPAN02E-15		15V	134mA			
SPAN02A-03		3.3V	500mA			
SPAN02A-05	12V	5V	400mA	4 510/100	40	
SPAN02A-12	(9~18V)	12V	167mA	1.5KVDC	-40~+90°C	
SPAN02A-15		15V	134mA			
SPAN02B-03		3.3V	500mA			
SPAN02B-05	24V	5V	400mA	1.5KVDC	-40~+90°C	
SPAN02B-12	(18~36V)	12V	167mA	1.5KVDC	-40~+90°C	
SPAN02B-15		15V	134mA			
SPAN02C-03		3.3V	500mA			
SPAN02C-05	48V	5V	400mA	4 EKV/D0	40 +0000	
SPAN02C-12	(36~75V)	12V	167mA	1.5KVDC	-40~+90°C	
SPAN02C-15		15V	134mA			

woder No.	V in	V out	lout	voltage	temperature
SPAN02E-03		3.3V	500mA		
SPAN02E-05	5V	5V	400mA	1.5KVDC	-40~+90°C
SPAN02E-12	(4.5~9V)	12V	167mA	1.5KVDC	-40~+90 C
SPAN02E-15		15V	134mA		
SPAN02A-03		3.3V	500mA		
SPAN02A-05	12V	5V	400mA	4.510/00	40
SPAN02A-12	(9~18V)	12V	167mA	1.5KVDC	-40~+90°C
SPAN02A-15		15V	134mA		
SPAN02B-03		3.3V	500mA		
SPAN02B-05	24V	5V	400mA		
SPAN02B-12	(18~36V)	12V	167mA	1.5KVDC	-40~+90°C
SPAN02B-15		15V	134mA		
SPAN02C-03		3.3V	500mA		
SPAN02C-05	48V	5V	400mA	v	
SPAN02C-12	(36~75V)	12V	167mA	1.5KVDC	-40~+90°C
SPAN02C-15		15V	134mA		

Model No.	V in	Vout	lout	Isolation voltage	Operating temperature
DPAN02E-05	5V	±5V	±200mA	4.510.450	40
DPAN02E-12 DPAN02E-15	(4.5~9V)	±12V ±15V	±83mA ±67mA	1.5KVDC	-40~+90°C
DPAN02A-05 DPAN02A-12 DPAN02A-15	12V (9~18V)	±5V ±12V ±15V	±200mA ±83mA ±67mA	1.5KVDC	-40~+90°C
DPAN02B-05 DPAN02B-12 DPAN02B-15	24V (18~36V)	±5V ±12V ±15V	±200mA ±83mA ±67mA	1.5KVDC	-40~+90°C
DPAN02C-05 DPAN02C-12 DPAN02C-15	48V (36~75V)	±5V ±12V ±15V	±200mA ±83mA ±67mA	1.5KVDC	-40~+90°C

SIP8, Regulated 2W, 2:1 Vin, Dual Vout DPAN02 [III UK C

SIP8,	Regula	ited 9W,	2:1 Vin,	Single V	out SPB09	ENI EK C€
Model	No.	V in	Vout	lout	Isolation voltage	Operating temperature
SPB09/	4-03		3.3V	2000mA		
SPB09A	A- 05		5V	1600mA		
SPB09A	A-12	12V (9~18V)	12V	750mA	1.5KVDC	-40~+90°C
SPB09A	A-15	,	15V	600mA		
SPB09A	A-24		24V	375mA		
SPB09E	3-03		3.3V	2000mA		
SPB09E	3-05		5V	1600mA		
SPB09B	3-12	24V (18 ~36V)	12V	750mA	1.5KVDC	-40~+90°C
SPB09E	3-15	,	15V	600mA		
SPB09E	3-24		24V	375mA		
SPB090	C-03		3.3V	2000mA		
SPB090	C-05		5V	1600mA		
SPB090	C-12	48V (36 ~75V)	12V	750mA	1.5KVDC	-40~+90°C
SPB090	C-15	,	15V	600mA		
SPB090	C-24		24V	375mA		

SIP8, Regula	ated 9W, 2:1	I Vin, □	Oual Vout	DPB09	EHI EK C €
Model No.	V in	Vout	lout	Isolation voltage	Operating temperature
DPB09A-05		±5V	±800mA		
DPB09A-12	12V (9~18V)	±12V	±375mA	1.5KVDC	-40~+90°C
DPB09A-15	(5 .51)	±15V	±300mA		
DPB09B-05		±5V	±800mA		
DPB09B-12	24V (18 ~36V)	±12V	±375mA	1.5KVDC	-40~+90°C
DPB09B-15	(10 000)	±15V	±300mA		
DPB09C-05		±5V	±800mA		
DPB09C-12	48V (36 ~75V)	±12V	±375mA	1.5KVDC	-40~+90°C
DPB09C-15	(00 104)	±15V	±300mA		



DC/DC Converter 3~6W SIP Regulated Module Type MEAN WELL












SPBW03 / DPBW03 Series 21.8(0.86) Unit: mm(inch)

DPBW03G-15

Pin No.	Pin-	-Out
PIN NO.	SPBW03	DPBW03
1	-Vin	-Vin
2	+Vin	+Vin
3	R.C.	R.C.
5	N.C.	N.C.
6	+Vout	+Vout
7	-Vout	Common
8	N.C.	-Vout



D:- N-	Pin-	-Out
Pin No.	SPBW06	DPBW06
1	-Vin	-Vin
2	+Vin	+Vin
3	R.C.	R.C.
5	N.C.	N.C.
6	+Vout	+Vout
7	-Vout	Common
8	N.C.	-Vout

SPBW03 [HI CK €

Operating temperature

-40~+85°C

SIP8, Regulated	3W, 4:1 V _{in} ,	Single Vout		
Model No.	Vin	Vout	lout	Isolation voltage
SPBW03F-03		3.3V	700mA	
SPBW03F-05	12V, 24V	5V	600mA	1.5KVDC
SPBW03F-12	(9~36V)	12V	250mA	1.5KVDC
SPBW03F-15		15V	200mA	

SPBW03G-03		3V	700mA		
SPBW03G-05	24V, 48V	5V	600mA	1.5KVDC	-40~+85°C
SPBW03G-12	(18~75V)	12V	250mA	1.5KVDC	-40~+05 C
SPBW03G-15		15V	200mA		

■SIP8, Regulated	3W, 4:1 V _{in} , Dual	Vout			DPBW03 ⊞EKC€
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
DPBW03F-05	40)/ 04)/	±5V	±300mA		
DPBW03F-12	12V, 24V (9~36V)	±12V	±125mA	1.5KVDC	-40~+85°C
DPBW03F-15	(0 000)	±15V	±100mA		
DPBW03G-05		±5V	±300mA		
	24V, 48V			4 510150	400500
DPBW03G-12	(18~75V)	±12V	±125mA	1.5KVDC	-40~+85°C
DDDIMOOO 45	(,	. 451	. 400 4		

±100mA

±15V

■SIP8, Regulated	6W, 4:1 V _{in} , Sing	le V _{out}			SPBW06 [ALUKCE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SPBW06F-03		3.3V	1500mA		
SPBW06F-05	12V, 24V	5V	1200mA	1.5KVDC	-40~+85°C
SPBW06F-12	(9~36V)	12V	500mA	1.5KVDC	-40~+83 C
SPBW06F-15		15V	400mA		
SPBW06G-03		3.3V	1500mA		
SPBW06G-05	24V, 48V	5V	1200mA	1 EKV/DC	-40~+85°C
SPBW06G-12	(18~75V)	12V	500mA	1.5KVDC	-40~+65 C
SPBW06G-15		15V	400mA		

SIP8, Regulated	l 6W, 4:1 V _{in} , Dual	Vout			DPBW06 FALLER CE
Model No.	V in	Vout	out	Isolation voltage	Operating temperature
DPBW06F-05	12V. 24V	±5V	±600mA		
DPBW06F-12	(9~36V)	±12V	±250mA	1.5KVDC	-40~+85°C
DPBW06F-15	()	±15V	±200mA		
DPBW06G-05		±5V	±600mA		
DPBW06G-12	24V, 48V	±12V	±250mA	1.5KVDC	-40~+85°C
DPBW06G-15	(18~75V)	±15V	±200mA		


DC/DC Converter 0.5~1W DIP Unregulated Module Type









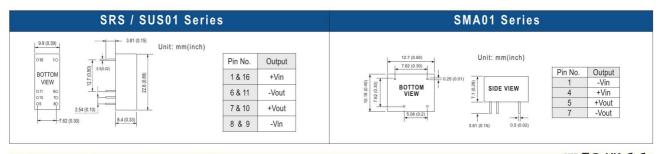

■ DIP16 Package	, Unregulated 0.5W,	±10% Vin / Single	V out	SR	S INFORME
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SRS-0505 SRS-0509 SRS-0512 SRS-0515	5V (4.5~5.5V)	5V 9V 12V 15V	100mA 56mA 42mA 34mA	1KVDC	-25~+71°C
SRS-1205 SRS-1209 SRS-1212 SRS-1215	12V (10.8~13.2V)	5V 9V 12V 15V	100mA 56mA 42mA 34mA	1KVDC	-25~+71°C
SRS-2405 SRS-2409 SRS-2412 SRS-2415	24V (21.6~26.4V)	5V 9V 12V 15V	100mA 56mA 42mA 34mA	1KVDC	-25~+71°C
SRS-4805 SRS-4809 SRS-4812 SRS-4815	48V (43.2~52.8V)	5V 9V 12V 15V	100mA 56mA 42mA 34mA	1KVDC	-25~+71°C

■ DIP16 Package	, Unregulated 1W, ±	10% Vin, Single V	out	SUSO	1 IHI FOUL CE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SUS01L-05 SUS01L-09 SUS01L-12 SUS01L-15	5V (4.5~5.5V)	5V 9V 12V 15V	200mA 111mA 84mA 67mA	1KVDC	-25~+71°C
SUS01M-05 SUS01M-09 SUS01M-12 SUS01M-15	12V (10.8~13.2V)	5V 9V 12V 15V	200mA 111mA 84mA 67mA	1KVDC	-25~+71°C
SUS01N-05 SUS01N-09 SUS01N-12 SUS01N-15	24V (21.6~26.4V)	5V 9V 12V 15V	200mA 111mA 84mA 67mA	1KVDC	-25~+71°C
SUS010-05 SUS010-09 SUS010-12 SUS010-15	48V (43.2~52.8V)	5V 9V 12V 15V	200mA 111mA 84mA 67mA	1KVDC	-25~+71°C

■ DIP7 Package, I	Unregulated 1W, ±10)% Vin, Single Vout		SMAO	IN FOUNCE
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
SMA01L-05 SMA01L-09 SMA01L-12 SMA01L-15	5V (4.5~5.5V)	5V 9V 12V 15V	200mA 110mA 84mA 67mA	1.5KVDC	-40~+90°C
SMA01M-05 SMA01M-09 SMA01M-12 SMA01M-15	12V (10.8~13.2V)	5V 9V 12V 15V	200mA 110mA 84mA 67mA	1.5KVDC	-40~+90°C
SMA01N-05 SMA01N-09 SMA01N-12 SMA01N-15	24V (21.6~26.4V)	5V 9V 12V 15V	200mA 110mA 84mA 67mA	1.5KVDC	-40~+90°C

DC/DC Converter 3W DIP Regulated Module Type






SLC03 / DLC03 (0.87"x 0.54"x 0.34")



SCWN03 / DCWN03 (1.25"x 0.8"x 0.4")

SLC03 / DLC03 Series Unit: mm (inch) **BOTTOM VIEW** 22.1(0.87) SIDE VIEW

Din No	Pin	-Out
Pin No.	SLC03	DLC03
1	-Vin	-Vin
7	N.C.	N.C.
8	N.C.	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin



Din No	Pin	Pin-Out				
Pin No.	SCWN03	DCWN03				
2&3	-Vin	-Vin				
9	N.C.	Common				
11	N.C.	-Vout				
14	+Vout	+Vout				
16	-Vout	Common				
22&23	+Vin	+Vin				

■ DIP16 Package, Regulated 3W, 2:1 V_{in}, Single V_{out} EHI CKCE SLC03

Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SLC03A-05		5V	600mA		
SLC03A-12	12V (9~18V)	12V	250mA	1.5KVDC	-40~+85°C
SLC03A-15	(0 .01)	15V	200mA		
SLC03B-05		5V	600mA		
SLC03B-12	24V 18~36V)	12V	250mA	1.5KVDC	-40~+85°C
SLC03B-15	,	15V	200mA		
SLC03C-05		5V	600mA		
SLC03C-12	48V (36~75V)	12V	250mA	1.5KVDC	-40~+85°C
SLC03C-15	(/01)	15V	200mA		

■ DIP16 Package, Regulated 3W, 2:1 V_{in}, Dual V_{out} EHIKKC€

Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
DLC03A-05		±5V	±300mA		
DLC03A-12	12V (9~18V)	±12V	±125mA	1.5KVDC	-40~+85°C
DLC03A-15	(/	±15V	±100mA		
DLC03B-05 DLC03B-12 DLC03B-15	24V (18~36V)	±5V ±12V ±15V	±300mA ±125mA ±100mA	1.5KVDC	-40~+85°C
DLC03C-05 DLC03C-12 DLC03C-15	48V (36~75V)	±5V ±12V ±15V	±300mA ±125mA ±100mA	1.5KVDC	-40~+85°C

■ DIP24 Package, Regulated 3W, 2:1 Vin, Single Vout SCWN03 EHI LIK C €

Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SCWN03E-03		3.3V	600mA		
SCWN03E-05	5V	5V	600mA	3KVDC	-40~+90°C
SCWN03E-12	(4.5~9V)	12V	250mA	SKVDC	-40~+90 C
SCWN03E-15		15V	200mA		
SCWN03A-03		3.3V	600mA		
SCWN03A-05	12V	5V	600mA	3KVDC	-40~+90°C
SCWN03A-12	(9~18V)	12V	250mA	SKVDC	-40 130 0
SCWN03A-15		15V	200mA		
SCWN03B-03		3.3V	600mA		
SCWN03B-05	24V	5V	600mA	3KVDC	-40~+90°C
SCWN03B-12	(18~36V)	12V	250mA	SKVDC	-40~+90 C
SCWN03B-15		15V	200mA		
SCWN03C-03		3.3V	600mA		
SCWN03C-05	48V	5V	600mA	3KVDC	-40~+90°C
SCWN03C-12	(36~72V)	12V	250mA	SKVDC	-40-790 C
SCWN03C-15		15V	200mA		

■ DIP24 Package, Regulated 3W, 2:1 V_{in}, Dual V_{out} DCWN03 ⊞器€

Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
DCWN03E-05		±5V	±300mA		
DCWN03E-12	5V (4.5~9V)	±12V	±125mA	3KVDC	-40~+90°C
DCWN03E-15	,	±15V	±100mA		
DCWN03A-05		±5V	±300mA		
DCWN03A-12	12V (9~18V)	±12V	±125mA	3KVDC	-40~+90°C
DCWN03A-15	(5 .51)	±15V	±100mA		
DCWN03B-05		±5V	±300mA		
DCWN03B-12	24V (18~36V)	±12V	±125mA	3KVDC	-40~+90°C
DCWN03B-15	(±15V	±100mA		
DCWN03C-05		±5V	±300mA		
DCWN03C-12	48V (36~72V)	±12V	±125mA	3KVDC	-40~+90°C
DCWN03C-15	,	±15V	±100mA		




DC/DC Converter 6~8W DIP Regulated Module Type MEAN WELL







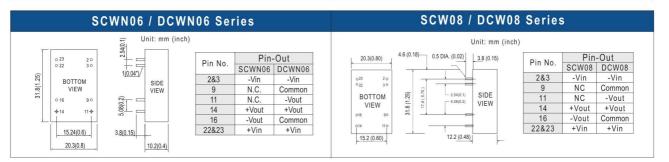

■ DIP24 Package,	Regulated 6W, 2:1	V _{in} , Single V _{out}		SC	WN06	ENI FR C E
Model No.	Vin	V out	lout	Isolation voltage	Operatir	ng temperature
SCWN06A-03 SCWN06A-05 SCWN06A-12 SCWN06A-15	12V (9~18V)	3.3V 5V 12V 15V	1200mA 1000mA 500mA 400mA	3KVDC	-4	10~+90°C
SCWN06B-03 SCWN06B-05 SCWN06B-12 SCWN06B-15	24V (18~36V)	3.3V 5V 12V 15V	600mA 600mA 250mA 200mA	3KVDC	-4	0~+90°C
SCWN06C-03 SCWN06C-05 SCWN06C-12 SCWN06C-15	48V (36~72V)	3.3V 5V 12V 15V	1200mA 1000mA 500mA 400mA	3KVDC	-4	0~+90°C
■ DIP24 Package	, Regulated 6W, 2:1	V _{in} , Dual V _{out}		DC	WN06	ENI SR C €

Į.	■ DIP24 Package	, Regulated 6W, 2:1	Vin, Dual Vout		DC	WN06	IHI CACE
	Model No.	Vin	Vout	lout	Isolation voltage	Operating t	emperature
	DCWN06A-05 DCWN06A-12 DCWN06A-15	12V (9~18V)	±5V ±12V ±15V	±500mA ±250mA ±200mA	3KVDC	-40~+	-90°C
	DCWN06B-05 DCWN06B-12 DCWN06B-15	24V (18~36V)	±5V ±12V ±15V	±500mA ±250mA ±200mA	3KVDC	-40~+	-90°C
	DCWN06C-05 DCWN06C-12 DCWN06C-15	48V (36~72V)	±5V ±12V ±15V	±500mA ±250mA ±200mA	3KVDC	-40~+	-90°C

■ DIP24 Package	, Regulated 8W, 2:1	V _{in} , Single V _{out}		SC	CW08 [H[FC LKCE
Model No.	V in	Vout	lout	Isolation voltage	Operating temperature
SCW08A-05 SCW08A-12 SCW08A-15	12V (9~18V)	5V 12V 15V	1600mA 670mA 533mA	1KVDC	-40~+71°C
SCW08B-05 SCW08B-12 SCW08B-15	24V (18~36V)	5V 12V 15V	1600mA 670mA 533mA	1KVDC	-40~+71°C
SCW08C-05 SCW08C-12 SCW08C-15	48V (36~72V)	5V 12V 15V	1600mA 670mA 533mA	1KVDC	-40~+71°C


■ DIP24 Package,	Regulated 8W, 2:	1 V _{in} , Dual V _{out}		DC	CW08 FILL LC FU CE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
DCW08A-05 DCW08A-12 DCW08A-15	12V (9~18V)	±5V ±12V ±15V	±800mA ±335mA ±267mA	1KVDC	-40~+71°C
DCW08B-05 DCW08B-12 DCW08B-15	24V (18~36V)	±5V ±12V ±15V	±800mA ±335mA ±267mA	1KVDC	-40~+71°C
DCW08C-05 DCW08C-12 DCW08C-15	48V (36~72V)	±5V ±12V ±15V	±800mA ±335mA ±267mA	1KVDC	-40~+71°C



DC/DC Converter 12~20W DIP Regulated Module Type





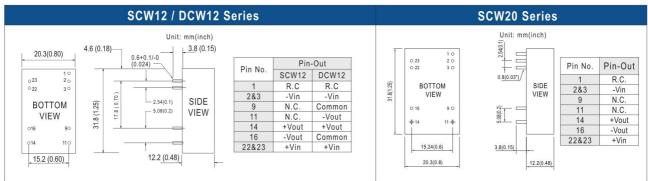

■ DIP24 Package,	Regulated 12W, 2:	1 V _{in} , Single V _{out}		SCW	12 EHIFE EACE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SCW12A-05	40)/	5V	2400mA		
SCW12A-12	12V (9~18V)	12V	1000mA	1.5KVDC	-40~+71°C
SCW12A-15	(9-101)	15V	800mA		
SCW12B-05		5V	2400mA		
SCW12B-12	24V (18~36V)	12V	1000mA	1.5KVDC	-40~+71°C
SCW12B-15	(10-307)	15V	800mA		
SCW12C-05	4014	5V	2400mA		
SCW12C-12	48V (36~72V)	12V	1000mA	1.5KVDC	-40~+71°C
SCW12C-15	(00 124)	15V	800mA		

■ DIP24 Package	, Regulated 12W, 2:	1 V _{in} , Dual V _{out}		DCW	12 EHIF© EKCE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
DCW12A-05	40)/	±5V	±1200mA		
DCW12A-12	12V (9~18V)	±12V	±500mA	1.5KVDC	-40~+71°C
DCW12A-15	(0 100)	±15V	±400mA		
DCW12B-05	- 0.4	±5V	±1200mA		
DCW12B-12	24V (18~36V)	±12V	±500mA	1.5KVDC	-40~+71°C
DCW12B-15	(10 000)	±15V	±400mA		
DCW12C-05	4017	±5V	±1200mA		
DCW12C-12	48V (36~72V)	±12V	±500mA	1.5KVDC	-40~+71°C
DCW12C-15	(00 121)	±15V	±400mA		

■ DIP24 Package, Regulated 20	W, 2:1 V _{in} , Single V _{out}		SCW	20 ENI 2K C €
Model No. Vin	Vout	lout	Isolation voltage	Operating temperature
SCW20A-05	5V	4000mA		
SCW20A-12 12V (9~18V)	12V	1660mA	1.5KVDC	-40~+80°C
SCW20A-15	15V	1333mA		
SCW20B-05	5V	4000mA		
SCW20B-12 24V (18~36V)	12V	1666mA	1.5KVDC	-40~+80°C
SCW20B-15	15V	1333mA		
SCW20C-05	5V	4000mA		
SCW20C-12 48V (36~75V)	12V	1660mA	1.5KVDC	-40~+80°C
SCW20C-15	15V	1333mA		

DC/DC Converter 6~10W 1"x1" Module Type













SKMW06 / DK	MW06 Series	SKM10 / DKM10 Series			
5,08(0.2) 10.2(0.4) 4,1±0.5(0.16) Unit: r 5,08(0.2) 10.2(0.4) ViEW 5 4 3 4,1±0.5(0.16) 4,1±0.5(0.16)	Pin No. Pin-Out SKMW06 DKMW 1	7.52(0.3) 5.08(0.2) 10.2(0.4) 4	SIDE VIEW	4 Trim Common	

■ 1"x1", Regulated 6W, 4:1 V_{in}, Single V_{out} CAN US FAI CH CE SKMW06

Model No.	Vin	V out	lout	Isolation voltage	Operating temperature
SKMW06F-03		3.3V	1500mA		
SKMW06F-05		5V	1200mA		
SKMW06F-09	12V, 24V	9V	667mA	1.5KVDC	-40~+85°C
SKMW06F-12	(9~36V)	12V	500mA	1.50000	
SKMW06F-15		15V	400mA		
SKMW06F-24		24V	250mA		
SKMW06G-03		3.3V	1500mA		
SKMW06G-05	24V, 48V (18~75V)	5V	1200mA		
SKMW06G-12		12V	500mA	1.5KVDC	-40~+85°C
SKMW06G-15		15V	400mA		
SKMW06G-24		24V	250mA		

■ 1"x1", Regulated 6W, 4:1 V_{in}, Dual V_{out} CAN US ERICE CE DKMW06 NEW

Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
DKMW06F-05		±5V	±600mA		
DKMW06F-12	12V, 24V (9~36V)	±12V	±250mA	1.5KVDC	-40~+85°C
DKMW06F-15		±15V	±200mA		
DKMW06F-24		±24V	±125mA		
DKMW06G-05		±5V	±600mA		
DKMW06G-12	24V, 48V (18~75V)	±12V	±250mA	1.5KVDC	-40~+85°C
DKMW06G-15		±15V	±200mA		

■ 1"x1", Regulated 10W, 2:1 V_{in}, Single V_{out} EHI LIK C € SKM10

Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SKM10E-03 SKM10E-05 SKM10E-12 SKM10E-15	5V (4.7~9V)	3.3V 5V 12V 15V	2500mA 2000mA 833mA 666mA	1.5KVDC	-40~+85°C
SKM10A-03 SKM10A-05 SKM10A-12 SKM10A-15	12V (9~18V)	3.3V 5V 12V 15V	2500mA 2000mA 833mA 666mA	1.5KVDC	-40~+85°C
SKM10B-03 SKM10B-05 SKM10B-12 SKM10B-15	24V (18~36V)	3.3V 5V 12V 15V	2500mA 2000mA 833mA 666mA	1.5KVDC	-40~+85°C
SKM10C-03 SKM10C-05 SKM10C-12 SKM10C-15	48V (36~75V)	3.3V 5V 12V 15V	2500mA 2000mA 833mA 666mA	1.5KVDC	-40~+85°C

■ 1"x1", Regulated 10W, 2:1 V_{in}, Dual V_{out} EHI LIK C € DKM10

Model No.	Vin	V out	lout	lsolation voltage	Operating temperature
DKM10E-05	5V	±5V	±1000mA		
DKM10E-12	(4.7~9V)	±12V	±416mA	1.5KVDC	-40~+85°C
DKM10E-15	,	±15V	±333mA		
DKM10A-05	4017	±5V	±1000mA		
DKM10A-12	12V (9~18V)	±12V	±416mA	1.5KVDC	-40~+85°C
DKM10A-15	(9~10V)	±15V	±333mA		
DKM10B-05		±5V	±1000mA		
DKM10B-12	24V (18~36V)	±12V	±416mA	1.5KVDC	-40~+85°C
DKM10B-15	(10 001)	±15V	±333mA		
DKM10C-05		±5V	±1000mA		
DKM10C-12	48V (36~75V)	±12V	±416mA	1.5KVDC	-40~+85°C
DKM10C-15	(50 750)	±15V	±333mA		



15~20W 1"x1" Module Type










SKMW20/DKMW20 (1"x 1"x 0.4")

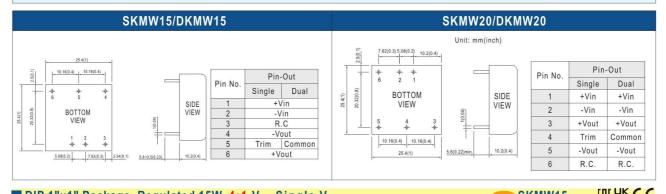

DIP 1"x1" Packa	ge, Regulated 15W	/, 4:1 V _{in} , Single V	out	NEW S	KMW15	HII SACE
Model No.	Vin	Vout	lout	Isolation voltage	Operating ter	mperature
SKMW15F-03		3.3V	3000mA			
SKMW15F-05	12V, 24V	5V	3000mA	3KVDC	-40~+8	E°C
SKMW15F-12	(9~36V)	12V	1250mA	SKVDC	-40*103 C	
SKMW15F-15		15V	1000mA			
SKMW15G-03		3.3V	3000mA			
SKMW15G-05	24V, 48V	5V	3000mA	21/1/DO	400	F * O
SKMW15G-12	(18~75V)	12V	1250mA	3KVDC	-40~+8	5.0
SKMW15G-15		15V	1000mA			

DIP 1"x1" Packa	age, Regulated 15W	, 4:1 V _{in} , Dual V _{ou}	t	NEW D	KMW15 EHLEACE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
DKMW15F-05	401/ 041/	±5V	±1500mA		
DKMW15F-12	12V, 24V (9~36V)	±12V	±625mA	3KVDC	-40~+85°C
DKMW15F-15	(0 001)	±15V	±500mA		
DKMW15G-05		±5V	±1500mA		
DKMW15G-12	24V, 48V (18~75V)	±12V	±625mA	3KVDC	-40~+85°C
DKMW15G-15	(10~75V)	±15V	±500mA		

■ DIP 1"x1" Packa	ge, Regulated 20W	I, 4:1 V _{in} , Single V _{out}		SI	KMW20	ENI CK C€
Model No.	Vin	Vout	out	Isolation voltage	Operating	temperature
SKMW20F-03		3.3V	4500mA			
SKMW20F-05	12V, 24V	5V	4000mA	1.5KVDC	-40~+85°C	
SKMW20F-12	(9~36V)	12V	1670mA	1.5KVDC	-40~+65 C	
SKMW20F-15		15V	1330mA			
SKMW20G-03		3.3V	4500mA			
SKMW20G-05	24V, 48V	5V	4000mA	1.5KVDC	10-	+85°C
SKMW20G-12	(18~75V)	12V	1670mA	1.3KVDC	-40~-	T00 C
SKMW20G-15		15V	1330mA			

DIP 1"x1" Packag	e, Regulated 20W	I, 4:1 V _{in} , Dual V _{out}		DI	KMW20 [HI CA C	E
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature	
DKMW20F-12	12V, 24V	±12V	±830mA	1.5KVDC	-40~+85°C	
DKMW20F-15	(9~36V)	±15V	±660mA	1.01(100	40 .00 0	
DKMW20G-12	24V. 48V	±12V	±830mA			
DKMW20G-15	(18~75V)	±15V	±660mA	1.5KVDC	-40~+85°C	



30W 1"x1" Module Type





SKMW30/DKMW30 (1"x 1"x 0.4")

SKMW30 & DKMW30 Series 7.62(0.3) 5.08(0.2) 10.2(0.4) Unit: mm(inch) Pin No. Single Dual +Vin +Vin 20.32(0.8) **BOTTOM** 25.4(1) SIDE -Vin -Vin VIEW VIEW 3 +Vout +Vout Trim Common 5 -Vout 10.16(0.4) 10.16(0.4) 6 R.C. R.C. 5.6(0.22)min. 10.2(0.4) 25.4(1)


■ DIP 1"x1" Package	e, Regulated 30V	V, 4:1 V _{in} , Single V _{out}		SKI	MW30 [H[2K (\in
Model No.	V in	Vout	lout	Isolation voltage	Operating temperature	е
SKMW30F-03		3.3V	7500mA			
SKMW30F-05	12V, 24V	5V	6000mA	1.5KVDC	-40∼+85°C	
SKMW30F-12	(9~36V)	12V	2500mA			
SKMW30F-15		15V	2000mA			
SKMW30G-03		3.3V	7500mA			
SKMW30G-05	24V, 48V (18~75V)	5V	6000mA	1.5KVDC	-40~+85°C	
SKMW30G-12	(10-73V)	12V	2500mA			
SKMW30G-15		15V	2000mA			


■ DIP 1"x1" Packag	e, Regulated 30V	V, 4:1 V _{in} , Dual V _{out}		DKI	MW30 [H[UK C €	
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature	
DKMW30F-12	12V, 24V (9~36V)	±12V	±1250mA	1.5KVDC	-40~+85°C	
DKMW30F-15	(9~36V)	±15V	±1000mA			
DKMW30G-12	24V, 48V	±12V	±1250mA	1.5KVDC	-40~+85°C	
DKMW30G-15	(18~75V)	±15V	±1000mA			



DC/DC Converter 5~10W 2"x1" Module Type





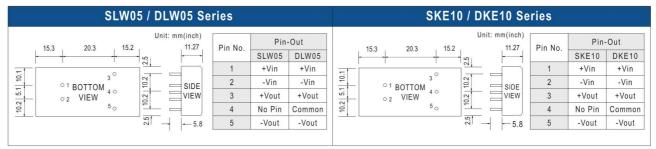

, ,	,		3	LIIL	OCHCC
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
SLW05A-05		5V	1000mA		05 37400
SLW05A-09	12V	9V	556mA	1KVDC	
SLW05A-12	(9~18V)	12V	417mA	IKVDC	-25~+71°C
SLW05A-15		15V	333mA		
SLW05B-05		5V	1000mA		
SLW05B-09	24V	9V	556mA	1KVDC	-25~+71°C
SLW05B-12	(18~36V)	12V	417mA		
SLW05B-15		15V	333mA		
SLW05C-05		5V	1000mA		
SLW05C-09	48V	9V	556mA	1KVDC	-25~+71°C
SLW05C-12	(36~72V)	12V	417mA	INVDC	-20~+/1 C
SLW05C-15		15V	333mA		

■ 2"x1", Regulated 5W, 2:1 Vin, Single Vout SLW05 [III FC CA CE = 2"x1", Regulated 10W, 2:1 Vin, Single Vout SKE10 [III FC CA CE

Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
SKE10A-05		5V	2000mA		
SKE10A-12	12V (9~18V)	12V	840mA		-25~+71°C
SKE10A-15		15V	660mA	1KVDC	
SKE10A-24		24V	420mA		
SKE10B-05		5V	2000mA		
SKE10B-12	24V	12V	840mA	1KVDC	-25~+71°C
SKE10B-15	(18~36V)	15V	660mA		
SKE10B-24		24V	420mA		
SKE10C-05		5V	2000mA		
SKE10C-12	48V	12V	840mA		05 7400
SKE10C-15	(36~72V)	15V	660mA	1KVDC	-25~+71°C
SKE10C-24		24V	420mA		

Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
DLW05A-05		±5V	±500mA		
DLW05A-12	12V (9~18V)	±12V	±208mA	1KVDC	-25~+71°C
DLW05A-15		±15V	±167mA		
DLW05B-05		±5V	±500mA		
DLW05B-12	24V (18~36V)	±12V	±208mA	1KVDC	-25~+71°C
DLW05B-15		±15V	±167mA		
DLW05C-05		±5V	±500mA		
DLW05C-12	48V (36~72V)	±12V	±208mA	1KVDC	-25~+71°C
DLW05C-15		±15V	±167mA		

■ 2"x1", Regulated 5W, 2:1 Vin, Dual Vout DLW05 [III FC LK C = 2"x1", Regulated 10W, 2:1 Vin, Dual Vout DKE10 [III FC LK C =


Model No.	Vin	Vout	out	lsolation voltage	Operating temperature
DKE10A-05		±5V	±1000mA		
DKE10A-12	12V	±12V	±420mA	1KVDC	-25~+71°C
DKE10A-15	(9~18V)	±15V	±333mA	INVDC	-25~+71 0
DKE10A-24		±24V	±210mA		
DKE10B-05		±5V	±1000mA		
DKE10B-12	24V	±12V	±420mA	1KVDC	-25~+71°C
DKE10B-15	(18~36V)	±15V	±333mA		
DKE10B-24		±24V	±210mA		
DKE10C-05		±5V	±1000mA		
DKE10C-12	48V	±12V	±420mA	1KVDC	-25~+71°C
DKE10C-15	(36~72V)	±15V	±333mA	INVDC	-25~+/1 6
DKE10C-24		±24V	±210mA		



15W 2"x1" Module Type







2"x1" Package,	Regulated 15W, 2:	1 V _{in} , Single V _{out}			SKA15 [H[F© LK C €
Model No.	V in	V out	lout	Isolation voltage	Operating temperature
SKA15A-033		3.3V	3000mA		
SKA15A-05	12V	5V	3000mA	1KVDC	-40~+71°C
SKA15A-12	(9~18V)	12V	1250mA	IKVDC	-40~+71 C
SKA15A-15		15V	1000mA		
SKA15B-033		3.3V	3000mA		
SKA15B-05	24V	5V	3000mA	1KVDC	-40~+71°C
SKA15B-12	(18~36V)	12V	1250mA		
SKA15B-15		15V	1000mA		
SKA15C-033		3.3V	3000mA		
SKA15C-05	48V	5V	3000mA	410/100	407400
SKA15C-12	(36~72V)	12V	1250mA	1KVDC	-40~+71°C
SKA15C-15		15V	1000mA		


■ 2"x1" Package,	Regulated 15W, 2:1	V _{in} , Dual V _{out}			DKA15 [HI FC LK C E
Model No.	V_{in}	Vout	lout	Isolation voltage	Operating temperature
DKA15A-05		±5V	±1500mA		
DKA15A-12	12V (9~18V)	±12V	±625mA	1KVDC	-40~+71°C
DKA15A-15		±15V	±500mA		
DKA15B-05		±5V	±1500mA		
DKA15B-12	24V (18~36V)	±12V	±625mA	1KVDC	-40~+71°C
DKA15B-15		±15V	±500mA		
DKA15C-05		±5V	±1500mA		
DKA15C-12	48V (36~72V)	±12V	±625mA	1KVDC	-40~+71°C
DKA15C-15		±15V	±500mA		



DC/DC Converter 20~50W 2"x1" Module Type





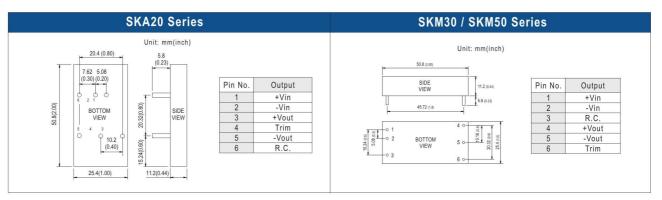

■ 2"x1" Package,	Regulated 20W, 2:	1 V _{in} , Single V _{out}			SKA20 [HI FC CACE	
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature	
SKA20A-05	40\/	5V	4000mA			
SKA20A-12	12V (9~18V)	12V	1666mA	1.5KVDC	-40~+85°C	
SKA20A-15	(0 101)	15V	1333mA			
SKA20B-05 SKA20B-12 SKA20B-15	24V (18~36V)	5V 12V 15V	4000mA 1666mA 1333mA	1.5KVDC	-40~+85°C	
SKA20C-05 SKA20C-12 SKA20C-15	48V (36~75V)	5V 12V 15V	4000mA 1666mA 1333mA	1.5KVDC	-40~+85°C	


2"x1" Package,	Regulated 30W, 2:	1 V _{in} , Single V _{out}			SKM30 [AI F@ LK C E
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SKM30A-05	40)/	5V	6000mA		
SKM30A-12	12V (9~18V)	12V	2500mA	1.5KVDC	-40~+75°C
SKM30A-15	(3 10)	15V	2000mA		
SKM30B-05 SKM30B-12 SKM30B-15	24V (18~36V)	5V 12V 15V	6000mA 2500mA 2000mA	1.5KVDC	-40~+75°C
SKM30C-05 SKM30C-12 SKM30C-15	48V (36~75V)	5V 12V 15V	6000mA 2500mA 2000mA	1.5KVDC	-40~+75°C


■ 2"x1" Package,	Regulated 50W, 2:	1 V _{in} , Single V _{out}			SKM50 [AI F@ LKCE
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
SKM50B-05		5V	10A		
SKM50B-12	24V (18~36V)	12V	4170mA	1.5KVDC	-40~+75°C
SKM50B-15	(12 221)	15V	3330mA		
SKM50C-05		5V	10A		
SKM50C-12	48V (36~75V)	12V	4170mA	1.5KVDC	-40~+75°C
SKM50C-15	(00 101)	15V	3330mA		



15W 2"x2" Module Type



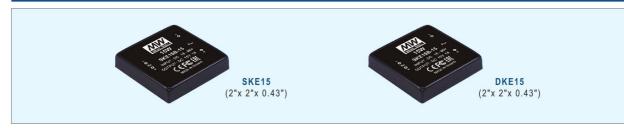

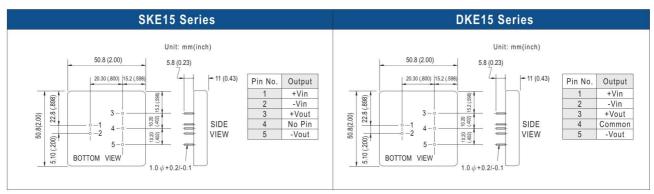

■ 2"x 2" Package,	Regulated 15W, 2:	1 V _{in} , Single V _{out}		SKE	IN FOUL CE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SKE15A-05		5V	3000mA		
SKE15A-12	12V	12V	1250mA	1KVDC	-25~+71°C
SKE15A-15	(9~18V)	15V	1000mA	IKVDC	
SKE15A-24		24V	625mA		
SKE15B-05		5V	3000mA		
SKE15B-12	24V	12V	1250mA	1KVDC	-25~+71°C
SKE15B-15	(18~36V)	15V	1000mA		
SKE15B-24		24V	625mA		
SKE15C-05		5V	3000mA		
SKE15C-12	48V	12V	1250mA	1KVDC	-25~+71°C
SKE15C-15	(36~72V)	15V	1000mA	INVDC	-25~+/ C
SKE15C-24		24V	625mA		

je, Regulated 15W, 2:1	V _{in} , Dual V _{out}		DKE	IN FOUNCE
V in	Vout	out	Isolation voltage	Operating temperature
	±5V	±1500mA		
12V	±12V	±625mA	1KV/DC	-25~+71°C
(9~18V)	±15V	±500mA	IKVDC	-25~+/ T C
	±24V	±313mA		
	±5V	±1500mA		
24V	±12V	±625mA	1KVDC	-25~+71°C
(18~36V)	±15V	±500mA		-23 171 0
	±24V	±313mA		
	±5V	±1500mA		
48V	±12V	±625mA	1KVDC	-25~+71°C
(36~72V)	±15V	±500mA	INVDC	-20**/1 0
	±24V	±313mA		
	Vin 12V (9~18V) 24V (18~36V)	±5V ±12V (9~18V) ±15V ±24V ±5V 24V (18~36V) ±15V ±24V ±5V ±24V ±5V ±12V (36~72V) ±15V	Vin Vout Iout ±5V ±1500mA 12V ±625mA (9~18V) ±15V ±500mA ±24V ±313mA ±5V ±1500mA 24V ±12V ±625mA (18~36V) ±15V ±500mA ±24V ±313mA ±5V ±5V ±1500mA ±625mA 48V ±12V ±625mA (36~72V) ±15V ±500mA	Vin Vout Iout Isolation voltage ±5V ±1500mA 12V ±625mA 1KVDC (9~18V) ±15V ±500mA 1KVDC ±24V ±313mA 1KVDC ±500mA 1KVDC ±15V ±1500mA 1KVDC ±24V ±313mA 1KVDC ±500mA ±5V ±1500mA 1KVDC ±48V ±12V ±625mA 1KVDC ±625mA 1KVDC ±15V ±500mA 1KVDC ±500mA ±500mA ±500mA 1KVDC ±500mA ±500mA ±500mA ±500mA ±500mA ±500mA


DC/DC Converter 30W 2"x2" Module Type









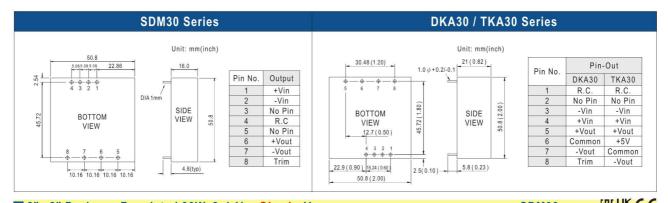

2"x 2" Package,	Regulated 30W, 2:1	V _{in} , Single V _{out}		SI	DM30 EHLERCE
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
SDM30-12S3		3.3V	5000mA		
SDM30-12S5	12V	5V	5000mA	1KVDC	-25~+85°C
SDM30-12S12	(9.2~18V)	12V	2100mA	INVDC	-25~+65 C
SDM30-12S15		15V	1700mA		
SDM30-24S3		3.3V	5000mA		
SDM30-24S5	24V	5V	5000mA	1KVDC	-25~+85°C
SDM30-24S12	(18~36V)	12V	2100mA	IKVDC	-25~+65 C
SDM30-24S15		15V	1700mA		
SDM30-48S3		3.3V	5000mA		
SDM30-48S5	48V	5V	5000mA	1KVDC	-25~+85°C
SDM30-48S12	(36~72V)	12V	2100mA	INVDC	-20~+85 C
SDM30-48S15		15V	1700mA		

2"x 2" Package	, Regulated 30W, 2:	1 V _{in} , Dual V _{out}		D	KA30 [H[FC LKCE
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
DKA30A-05	401/	±5V	±2500mA		
DKA30A-12	12V (9~18V)	±12V	±1250mA	1KVDC	-40~+85°C
DKA30A-15	(0 100)	±15V	±1000mA		
DKA30B-05		±5V	±2500mA		
DKA30B-12	24V (18~36V)	±12V	±1250mA	1KVDC	-40~+85°C
DKA30B-15	(10 '30V)	±15V	±1000mA		
DKA30C-05		±5V	±2500mA		
DKA30C-12	48V (36~72V)	±12V	±1250mA	1KVDC	-40~+85°C
DKA30C-15	(50 724)	±15V	±1000mA		


2"x 2" Package,	Regulated 30W,	2:1 V _{in} , Triple V _{out}		TK	A30 [A] FC LACE
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
TKA30A-B TKA30A-C	12V (9~18V)	5V / ±12V 5V / ±15V	3500mA / ±310mA 3500mA / ±250mA	1KVDC	-40~+85°C
TKA30B-B TKA30B-C	24V (18~36V)	5V / ±12V 5V / ±15V	3500mA / ±310mA 3500mA / ±250mA	1KVDC	-40~+85°C
TKA30C-B TKA30C-C	48V (36~72V)	5V / ±12V 5V / ±15V	3500mA / ±310mA 3500mA / ±250mA	1KVDC	-40~+85°C



DC/DC Converter 40~60W 2"x2" Module Type





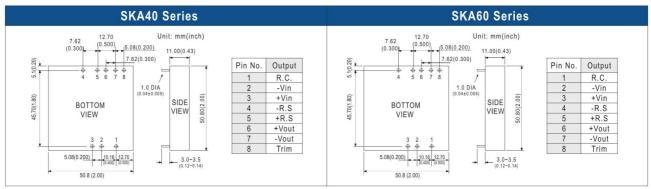

■ 2"x 2" Package,	Regulated 40W, 2	:1 V _{in} , Single V _{out}		S	KA40 [AI FE LACE
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
SKA40A-05		5V	7A		
SKA40A-12	12V (9~18V)	12V	3330mA	1.5KVDC	-40~+80°C
SKA40A-15	(5 .5.7)	15V	2670mA		
SKA40B-05	041/	5V	7A		
SKA40B-12	24V (18~36V)	12V	3330mA	1.5KVDC	-40~+80°C
SKA40B-15	,	15V	2670mA		
SKA40C-05	4017	5V	7A		
SKA40C-12	48V (36~75V)	12V	3330mA	1.5KVDC	-40~+80°C
SKA40C-15	(/ - /	15V	2670mA		


2"x 2" Package,	Regulated 60W, 2:	1 V _{in} , Single V _{out}		S	KA60 [AI FC LK C E
Model No.	V in	Vout	lout	Isolation voltage	Operating temperature
SKA60A-05		5V	12A		
SKA60A-12	12V (9~18V)	12V	5A	1.5KVDC	-40~+70°C
SKA60A-15		15V	4A		
SKA60B-05		5V	12A		
SKA60B-12	24V (18~36V)	12V	5A	1.5KVDC	-40~+70°C
SKA60B-15		15V	4A		
SKA60C-05		5V	12A		
SKA60C-12	48V (36~75V)	12V	5A	1.5KVDC	-40~+70°C
SKA60C-15		15V	4A		



DC/DC Converter 75~150W Half-brick Type





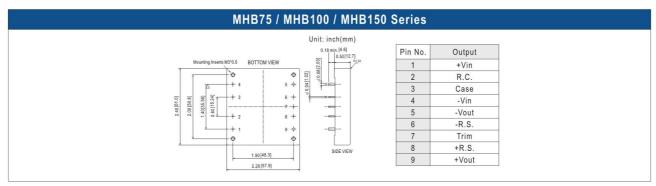

■ Half-brick, Regu	lated 75W, 2:1 V _{in}	MHB	75 CAN US FAI CK CE		
Model No.	Vin	Vout	out	Isolation voltage	Operating temperature
MHB75-12S05	4014	5V	15A		
MHB75-12S12	12V (9~18V)	12V	6.25A	1.5KVDC	-40~+100°C
MHB75-12S24	(3 100)	24V	3.13A		
MHB75-24S05		5V	15A		
MHB75-24S12	24V (18~36V)	12V	6.25A	1.5KVDC	-40~+100°C
MHB75-24S24	(10~30V)	24V	3.13A		
MHB75-48S05		5V	15A		
MHB75-48S12	48V (36~75V)	12V	6.25A	1.5KVDC	-40~+100°C
MHB75-48S24	(30-134)	24V	3.13A		

Half-brick, Regul	ated 100W, 2:1 V _i	n / Single Vout	MHB100 c SN us [A[Uk		
Model No.	Vin	Vout	lout	Isolation voltage	Operating temperature
MHB100-24S05	0.417	5V	20A		-40~+100°C
MHB100-24S12	24V (18~36V)	12V	8.3A	1.5KVDC	
MHB100-24S24	(10 300)	24V	4.17A		
MHB100-48S05		5V	20A		
MHB100-48S12	48V	12V	8.3A	1.5KVDC	-40~+100°C
MHB100-48S24	(36~75V)	24V	4.17A		

I	■ Half-brick, Regul	ated 150W, 2:1 V	n, Single V _{out}		MHB150		
	Model No.	Vin	Vout	out	Isolation voltage	Operating temperature	
	MHB150-48S05	40) /	5V	30A			
	MHB150-48S12	48V (36~75V)	12V	12.5A	1.5KVDC	-40~+100°C	
	MHB150-48S24	(30 73)	24V	6.25A			


	Heat Sink for MHB Series								
Order No.	M-C308 (Vertical Fins)	M-C091 (Horizontal Fins)	M-C092 (Horizontal Fins)						
Mechanical									
Note: Power module and heat sink should be ordered seperately. The heat sinks can be used with MHB75/100/150 series.									



DC/DC Converter 5~15W Isolated On Board Type





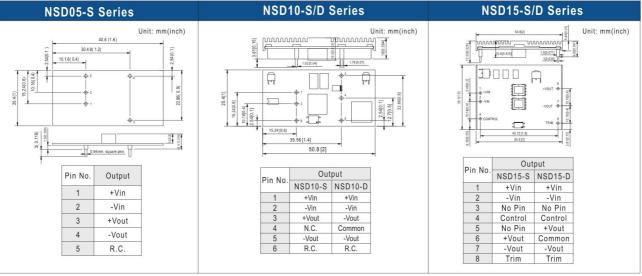

■ 5W, Isolated, Single Vout NSD05 🚔 [HICB LKCE Isolation Operating Model No. voltage NSD05-12S3 3.3V 1200mA 1000mA NSD05-12S5 5V 12V, 24V 1KVDC -25~+70°C NSD05-12S12 (9.2~36V) 12V 420mA NSD05-12S15 15V 330mA NSD05-48S3 3.3V 1200mA NSD05-48S5 24V, 48V 5V 1000mA 1KVDC -25~+70°C NSD05-48S12 (18~72V) 420mA 12V NSD05-48S15 15V 330mA

■ 10W, Isolat	ed, Sing	le V _{out}	NSD10-S	c FU	™[H[CPC €
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temp.
NSD10-12S3		3.3V	2500mA		
NSD10-12S5	40\/ 04\/	5V	2000mA		
NSD10-12S9	12V, 24V (9.8~36V)	9V	1100mA	1KVDC	-25~+70°C
NSD10-12S12	(3.0 300)	12V	830mA		
NSD10-12S15		15V	670mA		
NSD10-48S3 NSD10-48S5 NSD10-48S9 NSD10-48S12 NSD10-48S15	24V, 48V (22~72V)	3.3V 5V 9V 12V 15V	2500mA 2000mA 1100mA 830mA 670mA	1KVDC	-25~+70°C

■ 10W, Isolat	ed, Dual \	Vout	NSD10-D	c FL us	FILISACE
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temp.
NSD10-12D5 NSD10-12D12 NSD10-12D15	12V, 24V (9.8~36V)	±5V ±12V ±15V	±1000mA ±420mA ±330mA	1KVDC	-25~+70°C
NSD10-48D5 NSD10-48D12 NSD10-48D15	24V, 48V (22~72V)	±5V ±12V ±15V	±1000mA ±420mA ±330mA	1KVDC	-25~+70°C

I	■15W, Isolat	le V _{out}	NSD	15-S c	M ns CH CE	
	Model No.	V_{in}	\mathbf{V}_{out}	lout	Isolation voltage	Operating temp.
	NSD15-12S3		3.3V	3750mA		
	NSD15-12S5	12V	5V	3000mA	1.5KVDC	-25~+70°C
	NSD15-12S12	(9.4~36V)	12V	1250mA	1.5KVDC	
	NSD15-12S15		15V	1000mA		
	NSD15-48S3		3.3V	3750mA		
	NSD15-48S5	48V	5V	3000mA	1.5KVDC	-25~+70°C
	NSD15-48S12	(18~72V)	12V	1250mA	1.5KVDC	-23°+70 C
	NSD15-48S15		15V	1000mA		


■ 15W, Isola	NSD1	5-D c 9	I'S CA CE		
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temp.
NSD15-12D5		±5V	±1500mA		
NSD15-12D12	12V (9.4~36V)	±12V	±620mA	1.5KVDC	-25~+70°C
NSD15-12D15		±15V	±500mA		
NSD15-48D5		±5V	±1500mA		
NSD15-48D12	48V (18~72V)	±12V	±620mA	1.5KVDC	-25~+70°C
NSD15-48D15		±15V	±500mA		



DC/DC Converter 35~100W Non-Isolated Low Cost On Board Type MEAN WELL





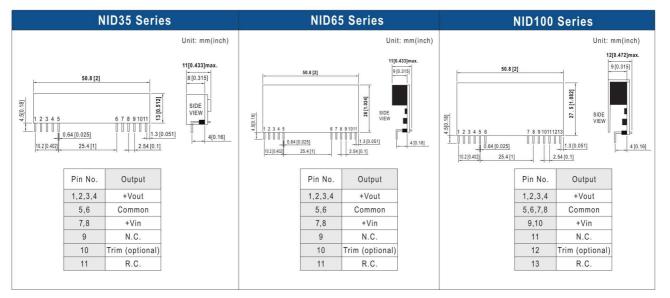

3	5W, Non-isolated				NID35 [A[UK C €
	Model No.	V_{in}	V_{out}	lout	Operating temperature
	NID35-05	12V, 24V, 48V (10.5~53V)	5V	3.5A	
	NID35-12	24V, 48V (20~53V)	12V	2.9A	-30~+85°C
	NID35-15	24V, 48V (20~53V)	15V	2.4A	-30~+05 C
	NID35-24	48V (30~53V)	24V	1.5A	

■ 65W, Non-isolated				NID65	ENI SK C€
Model No.	V_{in}	V_{out}	lout	Operating	g temperature
NID65-05	12V, 24V, 48V (10.5~53V)	5V	6.5A		
NID65-12	24V, 48V (20~53V)	12V	4.9A	20	05°0
NID65-15	24V, 48V (20~53V)	15V	4.3A	-30)~+85°C
NID65-24	48V (30~53V)	24V	2.7A		

■ 100W, Non-isolate	d			NID100	ENI 5K C €
Model No.	V_{in}	V_{out}	lout	Operatin	g temperature
NID100-05	12V, 24V, 48V (10.5~53V)	5V	11A		
NID100-12	24V, 48V (20~53V)	12V	7.5A	21)~+85°C
NID100-15	24V, 48V (20~53V)	15V	6.5A	-30)~+65 C
NID100-24	48V (30~53V)	24V	4.2A		



DC/DC Converter 15~45W Single Output Open Frame Type







■ 15W, Isolated, I	Regulated				PSD-15 EHLUK C€
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
PSD-15A-05		5V	3A		
PSD-15A-12	12V (9.2~18V)	12V	1.25A	1.5KVAC -10~-	-10~+60°C
PSD-15A-24	(3.2 10 0)	24V	0.6A		
PSD-15B-05		5V	3A		
PSD-15B-12	24V (18~36V)	12V	1.25A	1.5KVAC	-10~+60°C
PSD-15B-24	(10 000)	24V	0.6A		
PSD-15C-05		5V	3A		
PSD-15C-12	48V (36~72V)	12V	1.25A	1.5KVAC	-10~+60°C
PSD-15C-24	(30-720)	24V	0.6A		


■ 30W, Isolated,	Regulated				PSD-30 [H[CB CK €
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
PSD-30A-05		5V	5A		
PSD-30A-12	12V (9~18V)	12V	2.5A	1.5KVAC	-20~+60°C
PSD-30A-24	(0 100)	24V	1.25A		
PSD-30B-05	24V	5V	5A	4.5994.0	22 1222
PSD-30B-12 PSD-30B-24	(18~36V)	12V 24V	2.5A 1.25A	1.5KVAC	-20~+60°C
PSD-30C-05		5V	5A		
PSD-30C-12	48V (36~72V)	12V	2.5A	1.5KVAC	-20~+60°C
PSD-30C-24	(00 121)	24V	1.25A		

■ 45W, Isolated, R	egulated			P	SD-45 A FINCBUK (E
Model No.	V_{in}	V_{out}	lout	Isolation voltage	Operating temperature
PSD-45A-05	4017	5V	6A		
PSD-45A-12	12V (9.2~18V)	12V	2.5A	1.5KVAC	-10~+60°C
PSD-45A-24	(3.2 100)	24V	1.25A		
PSD-45B-05 PSD-45B-12 PSD-45B-24	24V (18~36V)	5V 12V 24V	9A 3.75A 1.875A	1.5KVAC	-10~+60°C
PSD-45C-05 PSD-45C-12 PSD-45C-24	48V (36~72V)	5V 12V 24V	9A 3.75A 1.875A	1.5KVAC	-10~+60°C



Accessories



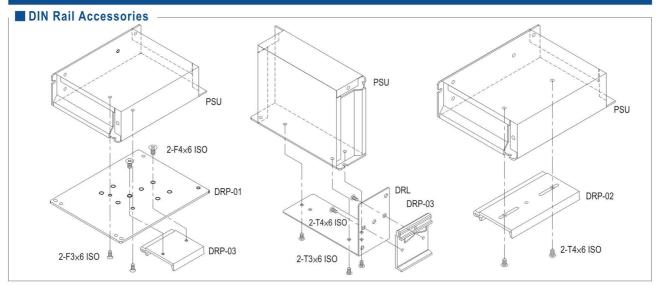

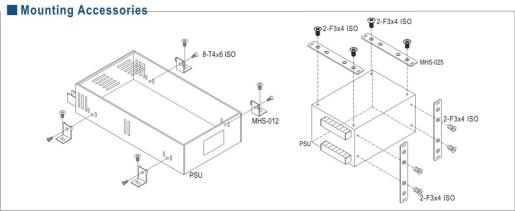




Photo	Order No.	Case	Model
	DRL-01	238, 239, 240 903 905 931 932 971	LRS-35/50/75/100 RS-25 RS-35 RS-15
	DRL-02	241 901 902 906 915 916 920	LRS-150/150F SD-100/150
	DRL-03A	980 987	SP-240, HRP(G)-300
	DRP-01	238, 239, 241 901, 902 903, 906 931, 932, 946	LRS-35/50/100/150/150F All models
	DRP-01A	203 205 978 999	RSD-100 / 150 / 200 / 300
	DRP-02	240 905 / 915 916 / 920 928	LRS-75
2	DRP-03	DRP-01 DRL-01~03	All models
	DRP-04	203 205 978 999	RSD-100 / 150 / 200 / 300

Photo	Order No.	Case	Model
6	MHS012	206, 207 HDP-190 215A RSP-200/320/500 912, 915 HS-200/350 916, 935 RSP-150 939, 940 SE-450/1000 977, 980 MP450/650/1000 982, 986 HRP-300/450/600 987, 995 RSP-2400/3000	
2	MHS013	919 926	PSP-500 SE-600
	MHS014	212 952	RSP-750 RSP-1000, SD-1000
10000	MHS025	910	PSP-600
4	MHS026	943	RSP-1500
Ever weight	MHS027	971 931	RS-15 RS-25
	TBC-05	901 903 905 932 220 239A 240A	SD-50 RS-75 RS-50 RS-35 RSP-75 LRS-35/50 LRS-75
TBC is the cover for terminal block	TBC-07	901 902 903 905 906 215A 227A 238A 241A	RD-85, RS-100 RD-125 RS-150, SD-100, RD/RID-65 RD-50 SD-150 RSP-150 RSP-100 LRS-100 LRS-150, LRS-150F
	TBC-08	901 906	AD-155, ADD/ADS-155
	TBC-09	207	RSP-200/320, LRS-200/350




MEAN WELL Suzhou Intelligent Campus

As a pioneer in standard power supply industry, MEAN WELL targeting the trend of Intelligent Technology, Energy Conservation, and Renewable Energy. Together with our PBM partnersand MEAN WELL's innovative solutions, we believe in creating a better future.



159

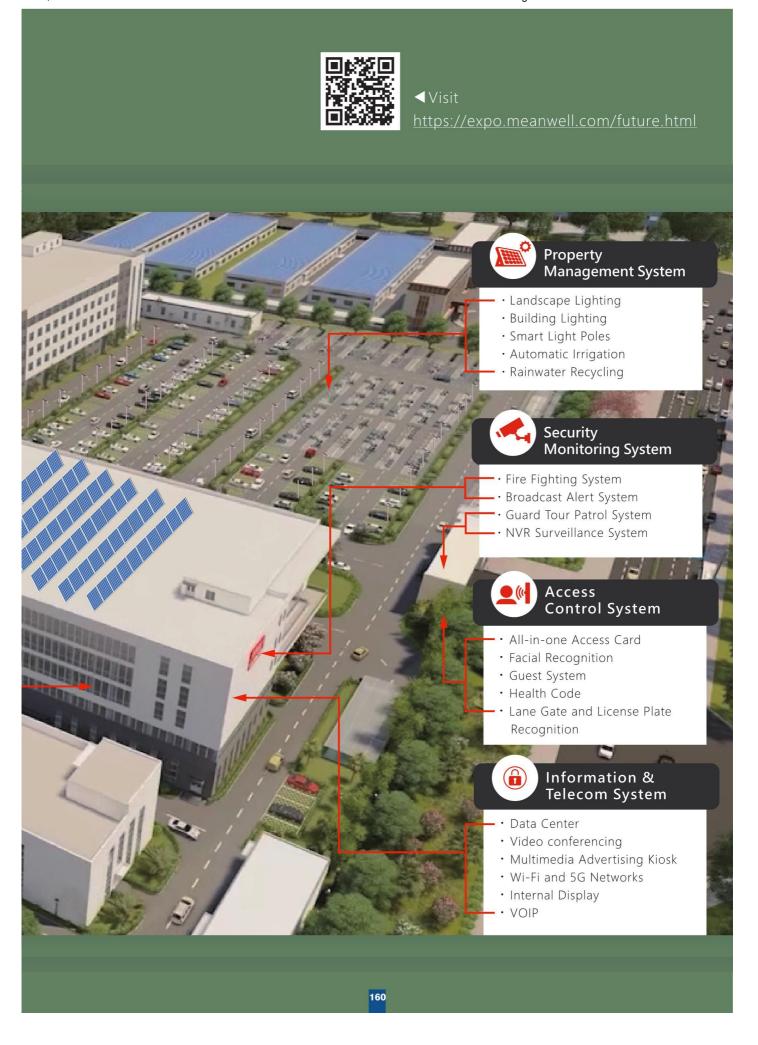



No.11, Jingu South Road, Huadong Town, Huadu District, Guangzhou, Guangdong, China Tel:+86-20-3773-7100 / 400-800-3608(sales)

+86-755-2359-1630(Shengzhen Office)

+86-28-8546-8628 (Chengdu Office)

E-mail:info@meanwell.com.cn www.meanwell.com.cn

蘇州明緯科技有限公司 SUZHOU MEAN WELL TECHNOLOGY CO., LTD.

江蘇省蘇州市相城區東橋鎮健民路77號 No.77, Jian-Min Rd. Dong-Qiao Town,

Xiang-Cheng District, Suzhou, Jiang-Su, China Post Code: 215152

Tel:+86-512-6508-8600

+86-10-5200-1817(Beijing Office)

Fax:+86-512-6508-8700 E-mail:info@meanwell.cc www.meanwell.cc

Please Contact Your Local Distributor



PRINTED WITH This catalog is printed with soy ink